



UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

862.C1892

First Named Inventor or Application Identifier

HIROSHI SATOMI

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages **143**

3. ☒ Drawing(s) (35 USC 113) Total Sheets **119**

4. ☒ Oath or Declaration Total Pages **3**

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	89-20 =	69	X \$ 18.00 =	\$1,242.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	5-3 =	2	X \$ 78.00 =	\$ 156.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
	Total of above Calculations =				\$2,348.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$2,348.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 2,348.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Leonard P. Diana (Reg. No. 29,296)
SIGNATURE	
DATE	April 10, 2000

TITLE OF THE INVENTION
INFORMATION PROVIDING METHOD,
INFORMATION PROVIDING SYSTEM,
TERMINAL APPARATUS, AND
5 STORAGE MEDIUM STORING INFORMATION PROVIDING PROGRAM

FIELD OF THE INVENTION

The present invention relates to a method and system
for providing information to a user, a storage medium
10 therefor, and a terminal apparatus used therefor.

BACKGROUND OF THE INVENTION

Along with the recent development of communication
technology, the following methods have been used to provide
15 information to users.

- 1: Internet Web
- 2: Internet push-type news distribution service
- 3: FAX information extraction service
- 4: Sending material requesting coupons attached to
20 newspapers/magazines
- 5: Inquiry by free dials
- 6: Sending material requesting postcards

As portable information terminals are being widely
used, information providing services using character
25 information are becoming active. However, since a
portable terminal has a limited display ability in size,

colors, and resolution, a demand has arisen for a detail information providing service capable of compensating for it.

The above methods are conventionally used to acquire
5 detail information, though they have limitations.

Methods 1 and 2 are limited to PC or terminal users well versed in the Internet environment, and it is also time-consuming to find a URL necessary for access to desired information. Method 3 is limited to FAX users. In
10 addition, the print ability (monochrome printing and print preview) is limited, and the output cost (telephone charge or cost of paper) is for the users to bear. Methods 4, 5, and 6 are available for many and unspecified users. However, a user can acquire information several hours or several days
15 after the request. The information provider side must also prepare a physical request processing system, resulting in an increase in information providing cost.

As described above, the prior art cannot propose an information providing method which allows a user to always
20 extract actually desired information and also appropriately extract information desired next.

SUMMARY OF THE INVENTION

The present invention has been proposed to solve the
25 problem of the above prior art.

In order to achieve the above object, the present

invention is characterized in that in providing information to a user, a code is input, first information corresponding to the input code is searched and extracted from a first database, when a predetermined condition is satisfied,
5 second information is searched and extracted from a second database, the extracted second information is attached to the first information, and the first information or first information having the second information is output.

When the predetermined condition is satisfied, the
10 second information is added to the first information and provided to the user. This copes with various user's requests for information and simultaneously ensures various information distribution routes on the information provider side. That is, many kinds of information can be
15 provided to the user, and the information provider side also enables to transfer more desired information to the user.

According to the present invention, there is also provided a method of extracting mail addressed to a user from a mail server, characterized by comprising the step
20 of sending an input user identifier to the mail server, the extraction step of extracting mail selected by the user from the mail server, the determination step of determining whether another information corresponding to the user is to be searched for and extracted, the attachment step of,
25 upon determining that the another information corresponding to the user is to be extracted, extracting

the another information and attaching the information to the mail, the step of outputting the mail having the another information, and the printing step of printing the output mail.

5 According to the present invention, there is also provided a system for providing information to a user, characterized by comprising input means for inputting a code, extraction means for searching a first database for first information corresponding to the input code and
10 extracting the first information, attachment means for, when a predetermined condition is satisfied, searching a second database for second information, extracting the second information, and attaching the extracted second information to the first information, and output means for
15 outputting the first information or the first information having the second information.

 According to the present invention, there is also provided a system for extracting mail addressed to a user from a mail server, characterized by comprising means for
20 sending an input user identifier to the mail server, means for extracting mail selected by the user from the mail server, determination means for determining whether another information corresponding to the user is to be searched for and extracted, attachment means for, upon
25 determining that the another information corresponding to the user is to be extracted, extracting the another

information and attaching the information to the mail, output means for outputting the mail having the another information, and printing means for printing the output mail.

5 According to the present invention, there is also provided a computer-readable storage medium which stores an information providing program for providing information to a user, characterized by comprising the input step of inputting a code, the extraction step of searching a first
10 database for first information corresponding to the input code and extracting the first information, the attachment step of, when a predetermined condition is satisfied, searching a second database for second information, extracting the second information, and attaching the
15 extracted second information to the first information, and the step of outputting the first information or the first information having the second information.

 According to the present invention, there is also provided a computer-readable storage medium which stores
20 a mail extraction program for extracting mail addressed to a user from a mail server, characterized by comprising the step of sending an input user identifier to the mail server, the extraction step of extracting mail selected by the user from the mail server, the determination step of determining
25 whether another information corresponding to the user is to be searched for and extracted, the attachment step of,

upon determining that the another information
corresponding to the user is to be extracted, extracting
the another information and attaching the information to
the mail, the step of outputting the mail having the another
5 information, and the printing step of controlling to print
the output mail.

Other features and advantages of the present invention
will be apparent from the following description taken in
conjunction with the accompanying drawings, in which like
10 reference characters designate the same or similar parts
throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in
15 and constitute a part of the specification, illustrate
embodiments of the invention and, together with the
description, serve to explain the principles of the
invention.

Fig. 1 is a view for explaining the schematic
20 arrangement of a P service system according to an
embodiment;

Fig. 2 is a view showing the schematic appearance of
a P service terminal 100 according to this embodiment;

Fig. 3 is a block diagram showing the control
25 arrangement of the P service terminal 100;

Fig. 4 is a view showing the schematic appearance of

a portable terminal 400 capable of transmitting a P-code to the P service terminal;

Fig. 5 is a block diagram for explaining the control arrangement of the portable terminal 400;

5 Fig. 6 is a block diagram showing the schematic arrangement of a P service server 200;

Fig. 7 is a view showing a data structure example of an IP information registration table;

10 Fig. 8 is a view showing a data structure example of an advertisement information table;

Fig. 9 is a view showing a data structure example of a user information table;

Fig. 10 is a view showing a data structure example of a mail service P-code table;

15 Fig. 11 is a view showing a data structure example of a distribution service P-code table;

Fig. 12 is a view showing a data structure example of a personal information service P-code table;

20 Fig. 13 is a view showing a data structure example of a personal information table;

Fig. 14 is a view showing a data structure example of an owner information table;

Fig. 15 is a view showing a data structure example of a terminal information table;

25 Fig. 16 is a block diagram showing the typical arrangement of an IP server 300;

Fig. 17 is a view for explaining the data structure of a P-code used in the P service system according to this embodiment;

Fig. 18 is a view showing the data structure of a
5 P-code;

Fig. 19 is a flow chart for explaining the outline of processing by the P service server of this embodiment;

Fig. 20 is a flow chart for explaining the outline of processing by the P service server of this embodiment;

10 Fig. 21 is a flow chart of user registration processing;

Fig. 22 is a dialog box for new registration processing;

15 Fig. 23 is a dialog box corresponding to a "name/address" button 1000;

Fig. 24 is a dialog box corresponding to a "password" button 1010;

Fig. 25 is a dialog box corresponding to a "place of employment" button 1020;

20 Fig. 26 is a dialog box corresponding to a "credit card" button 1030;

Fig. 27 is a dialog box corresponding to a "service" button 1040;

25 Fig. 28 is a dialog box corresponding to a "personal information" button 1050;

Fig. 29 is a dialog box corresponding to a "personal

information 2" button 1060;

Fig. 30 is a dialog box corresponding to a "desired information" button 1070;

Fig. 31 is a dialog box corresponding to a "printing paper" button 1080;

Fig. 32 is a dialog box for registration change processing;

Fig. 33 is a dialog box for password change;

Fig. 34 is a flow chart of IP information registration processing;

Fig. 35 is a dialog box for confirming a member;

Fig. 36 is a dialog box for inputting member's password;

Fig. 37 is a dialog box for specifying a nonmember;

Fig. 38 is a dialog box for inviting registration of a member;

Fig. 39 is a dialog box for setting charging;

Fig. 40 is a dialog box for designating IP information;

Fig. 41 is a dialog box for designating IP information;

Fig. 42 is a dialog box showing a preview window;

Fig. 43 is a dialog box when file transfer progresses;

Fig. 44 is a dialog box for setting a property;

Fig. 45 is a dialog box for setting another property;

Fig. 46 is a dialog box for setting still another property;

Fig. 47 is a dialog box for setting still another property;

5 Fig. 48 is a dialog box for confirming a password;

Fig. 49 is a dialog box for setting still another property;

Fig. 50 is a dialog box for setting still another property;

10 Fig. 51 is a dialog box for setting still another property;

Fig. 52A is a dialog box for setting still another property;

15 Fig. 52B is a dialog box for setting still another property;

Fig. 52C is a dialog box for setting still another property;

Fig. 53 is a dialog box for displaying the list of input items;

20 Fig. 54 is a flow chart of advertisement information registration processing;

Fig. 55 is a dialog box for confirming a member;

Fig. 56 is a dialog box for inputting a member's password;

25 Fig. 57 is a dialog box for specifying a nonmember;

Fig. 58 is a dialog box for designating advertisement

information;

Fig. 59 is as dialog box showing a preview window;

Fig. 60 is a dialog box when file transfer progresses;

5 Fig. 61 is a dialog box for setting a property;

Fig. 62 is a dialog box for setting another property;

Fig. 63 is a dialog box for setting still another property;

Fig. 64 is a dialog box for setting still another
10 property;

Fig. 65 is a dialog box for setting still another property;

Fig. 66 is a dialog box for setting still another property;

15 Fig. 67 is a dialog box for setting still another property;

Fig. 68 is a dialog box showing the list of input items;

Fig. 69 is a dialog box for printing registered
20 items;

Fig. 70 is a flow chart for explaining the personal P-code issue procedure in step S111;

Fig. 71 is a flow chart for explaining a procedure in which the P service server assigns the external code of
25 a P-code to anther site;

Fig. 72 is a view showing the data structure of a

P-code use registration table used in this embodiment;

Fig. 73 is a view showing the data structure of a P-code use table;

Fig. 74 is a flow chart for explaining IP-code issue
5 processing;

Fig. 75 is a view showing an example of the display window displayed on a touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 76 is a view showing another example of the
10 display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 77 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 78 is a view showing still another example of
15 the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 79 is a view showing still another example of the display window displayed on the touch panel 104 of the
20 P service terminal 100 of this embodiment;

Fig. 80 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 81 is a view showing still another example of
25 the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

P service terminal 100 of this embodiment;

Fig. 91 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

5 Fig. 92 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 93 is a view showing still another example of the display window displayed on the touch panel 104 of the
10 P service terminal 100 of this embodiment;

Fig. 94 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 95 is a view showing still another example of
15 the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 96 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

20 Fig. 97 is a view showing still another example of the display window displayed on the touch panel 104 of the P service terminal 100 of this embodiment;

Fig. 98A is a flow chart showing a processing flow for executing the information service of this embodiment;

25 Fig. 98B is a view showing the processing sequence in a service system for executing the information service

of this embodiment;

Fig. 99A is a flow chart showing a processing flow for executing the mail service of this embodiment;

Fig. 99B is a view showing the processing sequence
5 in the service system for executing the mail service of this embodiment;

Fig. 100A is a flow chart showing a processing flow for executing the distribution service (reception of registered information) of this embodiment;

10 Fig. 100B is a view showing the processing sequence in the service system for executing the distribution service (reception of registered information) of this embodiment;

Fig. 101A is a flow chart showing a processing flow
15 for executing the personal information service of this embodiment;

Fig. 101B is a view showing the processing sequence in the service system for executing the personal information service of this embodiment;

20 Fig. 102A is a flow chart showing a processing flow for executing the distribution service (registration of information) of this embodiment;

Fig. 102B is a view showing the processing sequence in the service system for executing the distribution
25 service (registration of information) of this embodiment;

Fig. 103A is a flow chart for explaining another form

of P-code transmission processing by the portable terminal
of this embodiment;

Fig. 103B is a flow chart for explaining a procedure
of acquiring IP information, mail data, and distribution
5 data in the P service server 200 of this embodiment;

Fig. 104 is a flow chart of advertisement search
processing;

Fig. 105A is a view showing an example of a keyword
list of IP information;

10 Fig. 105B is a view showing an example of a keyword
list of user registration;

Fig. 105C is a view showing an example of a keyword
list of the P service terminal;

15 Fig. 105D is a view showing an example of a highest
priority keyword list;

Fig. 105E is a view showing an example of a lowest
priority keyword list;

Fig. 106A is a view showing an example of the search
result list of an IP information list;

20 Fig. 106B is a view showing an example of the search
result list of a user registration list;

Fig. 106C is a view showing an example of the search
result list of a P service terminal list;

25 Fig. 106D is a view showing an example of the search
result list of a highest priority list;

Fig. 106E is a view showing an example of the search

result list of a lowest priority list;

Fig. 107A is a view showing an example of the search result list of the rearranged IP information list;

Fig. 107B is a view showing an example of the search
5 result list of the rearranged user registration list;

Fig. 107C is a view showing an example of the search result list of the rearranged P service terminal list;

Fig. 107D is a view showing an example of the search result list of the rearranged highest priority list;

10 Fig. 107E is a view showing an example of the search result list of the rearranged lowest priority list;

Fig. 108 is a flow chart for explaining P-code extraction processing of the portable terminal of this embodiment;

15 Fig. 109 is a flow chart for explaining automatic P-code extraction processing in step S3113;

Fig. 110 is a flow chart for explaining P-code transmission processing by the portable terminal of this embodiment; and

20 Fig. 111 is a flow chart for explaining another form of P-code transmission processing by the portable terminal of this embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

25 Preferred embodiments of the present invention will now be described in detail in accordance with the

accompanying drawings.

<System Arrangement>

A service system (to be referred to as a P service system hereinafter) to be described in this embodiment has
5 a plurality of service terminals (to be referred to as P service terminals hereinafter) installed in shops or stations and a dedicated service server (to be referred to as a P service server hereinafter) connected to the P service terminals. When a code (to be referred to as a
10 P-code hereinafter) in a predetermined form is input from a P service terminal, corresponding information is acquired from the P service server, and the print of necessary information is obtained. Note that designation of a P-code to a P service terminal can be done by unspecified users.

15 Fig. 1 is a view showing the schematic arrangement of the P service system according to this embodiment. Referring to Fig. 1, reference numeral 100 denotes a P service terminal; and 200, a P service server. The P service terminal 100 communicates with the P service server,
20 acquires information corresponding to a P-code input by a user, and prints the information. Alternatively, image information input in the P service terminal 100 can be uploaded to the P service server.

The P service terminal 100 can be a terminal installed
25 for public use in a shop, street, or public facility. In this case, the P service terminal 100 does not include a

terminal used by only a specific person, e.g., a so-called personal computer used by a person at home.

The P service server 200 issues P-codes corresponding to provided information, registers the P-codes in a P-code database, and manages them. The P service server 200
5 acquires information corresponding to a P-code input from the P service terminal 100, generates print data, and outputs it to the P service terminal 100.

An information provider server 300 (to be referred
10 to as an IP server hereinafter) is, e.g., a general Internet provider. In response to an information request from the P service server 200, the IP server 300 transmits information (contents) corresponding to the P-code attached to the information request to the P service server
15 200. Additionally, as will be described later, the P service server 200 sets a plurality of usable P-codes in the IP server 300, and the IP server 300 can uniquely issues a P-code in correspondence with information provided from a user terminal within the range of the usable P-codes.

20 Fig. 1 shows a system in which the P service server 200 and IP server 300 independently function, and information can be transmitted/received through a communication network. However, a system in which the P service server 200 incorporates the IP server 300, and the
25 function of the IP server is realized by the P service server may be constructed.

When the P-code of information managed on the IP server 300 side is input from the P service terminal 100, the P service server 200 finds a corresponding IP server from the P-code and transmits the P-code to this IP server
5 to request information.

A portable terminal 400 is, e.g., a portable telephone. The IP server 300 notifies a P service terminal user (to be simply referred to as a user hereinafter) of a P-code informed from the P service server 200 by inserting
10 the P-code on media 610 such as newspapers and magazines or describing the P-code in mail information transmitted to the user's portable terminal 400 using a portable telephone mail service 600. When the user inputs the P-code attached to information of interest from the P service
15 terminal 100, he/she can obtain the print of information corresponding to the P-code. The portable terminal 400 of this embodiment can extract a P-code described in mail information, hold it in an internal memory, and input the held P-code to the P service terminal 100 by infrared
20 communication or the like.

A service such as a mail service becomes available when personal registration is done in the P service server 200. This registration can be done from, e.g., a terminal of a user (user terminal 700) through a Web. Instead, the
25 user may fill a registration form with predetermined items, and the operator of the P service server may perform

registration processing in accordance with the described contents.

In this embodiment, two kinds of information are provided by the IP server 300 and registered/managed by the P service server 200. One is information (to be referred to as IP information hereinafter) provided to a user with or without charge on the basis of P-code designation by the user from the P service terminal 100 or the like. The other is information (to be referred to as advertisement information hereinafter) automatically selected by the P service server and attached to information (e.g., IP information) acquired in accordance with P-code input by the user.

As examples of services realized in the above-described P service system, the following services will be mainly described in this embodiment. (1) User registration: a personal P-code is given in accordance with registration application from the user terminal 700 to the P service server. (2) IP information registration: in accordance with IP information registration application from the IP server 300, IP information is registered in the P service server 200, and a P-code for the IP is given. (3) Advertisement information registration: in accordance with an advertisement information registration application, advertisement information is registered in the P service server 200. (4) Information service: by inputting the

P-code (P-code for the IP) of desired information from the P service terminal 100, a print output of the desired information is obtained. (5) Mail service: by inputting the user's P-code (personal P-code) from the P service terminal 100, mail addressed to the user is printed. (6) Personal information service: by inputting the user's P-code from the P service terminal 100, a print output of information set/registered for the user in advance is obtained. (7) Distribution service: desired information is uploaded from the P service terminal 100 to the P service server 200 in advance and printed from the P service terminal 100 as needed.

Each of these services will be described later in detail. The services and functions realized by the P service system of this embodiment are not limited to the above-described services and functions.

<Arrangement of P Service Terminal>

Fig. 2 is a view showing the schematic appearance of the P service terminal 100 of this embodiment. Referring to Fig. 2, a printer 101 forms a visible color image by, e.g., a laser beam scheme. A scanner 102 optically reads an original image and converts it into digital image data. The printing scheme of the printer 101 is not limited to the laser beam scheme, and any other scheme such as a thermal transfer scheme or ink-jet printing scheme can be used. Using the printer 101 and scanner 102, the service terminal

100 can also be made to function as a copying machine. A
main unit 103 controls communication with the P service
server 200 or communication with the portable terminal 400
and performs various operation inputs and display
5 corresponding to various operations.

In the main unit 103, a touch panel 104 receives an
operation input by a user and presents various information
to the user. An infrared communication section 105 is used
to receive a P-code from a portable terminal having an
10 infrared communication function by infrared communication.
When a portable terminal is connected to a portable terminal
connector 106, data (P-code) stored in the memory of the
portable terminal is read out by the P service terminal 100.
When a P-code is provided in a form of a bar code, a bar
15 code reader 107 is used to read the bar code to acquire the
P-code.

A disk unit 108 reads/writes data from/in a medium
such as a floppy disk or MO. A settlement unit 110 performs
settlement for the above-described various services. As
20 a settlement method, various methods including settlement
using cash or a credit card are available.

Fig. 3 is a block diagram showing the control
arrangement of the P service terminal 100. The same
reference numerals as in Fig. 2 denote the same parts in
25 Fig. 3. A communication section 124 is connected to the
P service server 200 through, e.g., a telephone line to

perform communication.

A control section 120 controls each construction described with reference to Fig. 2. In the control section 120, a CPU 121 realizes various control operations in the P service terminal 100 in accordance with control programs stored in a memory 122. User I/F control 122a controls execution of each of the following programs in accordance with a user's operation instruction input through the touch panel 104. Information service processing 122b, mail service processing 122c, personal information service processing 122d, and distribution service processing 122e realize the above-described various services, i.e., information service, mail service, personal information service, and distribution service, respectively. Settlement processing 122f realizes settlement processing using the settlement unit 110.

<Arrangement of Portable Terminal>

Fig. 4 is a view showing the schematic appearance of the portable terminal 400 capable of transmitting a P-code to the P service terminal 100. Like a general portable telephone, the portable terminal 400 has a liquid crystal display 410 and dial buttons and functions as a portable telephone. The portable terminal 400 can receive mail and displays its contents on the liquid crystal display 410. The cursor in the liquid crystal display can be moved using a left cursor 401 and right cursor 402 and can select a

desired block in mail in cooperation with a block designation key 404. When a P-code key 403 is pressed while a certain block in mail is kept selected, data in the selected block is stored in the internal memory as a P-code.

5 Instead, the P-code may be automatically searched for, extracted, and stored in the memory by pressing the P-code key 403 in a mail displayed state. Details of these operations will be described later with reference to Figs. 108 to 111.

10 An infrared communication section 405 outputs a P-code stored in the internal memory by infrared rays. The infrared rays output from the infrared communication section 405 are received by the infrared communication section 105 of the P service terminal 100 and recognized
15 as a P-code. The portable terminal 400 also has a communication connector on its button surface so as to exchange telephone number information between the terminal and a personal computer.

Fig. 5 is a block diagram for explaining the control
20 arrangement of the portable terminal 400. Referring to Fig. 5, a telephone function section 423 has functions necessary for communication processing as a portable telephone, including a loudspeaker, microphone, and radio communication functions. A communication connector 424 is
25 generally used to connect the portable terminal to a personal computer and upload or download a telephone number

or the like. In this embodiment, when the communication connector 424 is connected to the portable terminal connector 106 of the P service terminal 100, a P-code can be transferred to the P service terminal 100. A button group 425 corresponds to the group of various operation buttons described with reference to Fig. 4 (including the dial button group).

A control section 420 realizes control of the constructions described with reference to Fig. 4 or various control operations in the portable terminal 400 in accordance with control programs stored in a memory 422. Of the programs stored in the memory 422, portable terminal control 422a is a program unit for realizing a function as a normal portable telephone. P-code extraction processing 422b is a program unit for processing of extracting a P-code from received mail and storing the P-code in a P-code storage area 422c. As described above, to extract a P-code, data in a manually selected block is extracted as a P-code, or a P-code is automatically identified and extracted from mail data. P-code transmission processing 422d is a program unit for transmitting a P-code stored in the P-code storage area 422c to the P service terminal through the infrared communication section 405 or communication connector 424.

<Arrangement of P Service Server>

The P service server 200 will be described next.

Fig. 6 is a block diagram showing the schematic arrangement of the P service server 200. A control section 201 has a CPU 202 and memory 203. The CPU 202 realizes various services in the P service server 200 in accordance with control programs stored in the memory 203. The memory 203 stores the control programs to be executed by the CPU 202. Information registration processing 203a is a program module for registering, e.g., IP information, advertisement information, user information (personal information), the distribution data. P-code issue processing 203b is a program module for assigning a P-code for specifying each registered information. Service processing 203c acquires IP information, advertisement information, mail data, or distribution data or registers distribution data in accordance with a P-code transmitted from the P service terminal 100. Advertisement search processing 203d searches for advertisement information to be attached to a print output in the P service terminal. By attaching advertisement information, the information output charge is canceled by advertisement charges to reduce the cost for the user to bear in outputting information (printing). Data output processing 203e attaches advertisement information obtained by advertisement search processing to information obtained on the basis of a P-code input from the P service terminal 100, lays out the pieces of information on a printing paper sheet,

and generates and outputs print data.

A communication section 204 is connected to the P service terminal through a line or to each IP server 300 through a Web.

5 A P-code database 205 stores a table group 205a associated with P-codes and entity 205b of contents. The table group 205a includes an IP information registration table (Fig. 7), advertisement information table (Fig. 8), user information table (Fig. 9), mail service P-code table
10 (Fig. 10), distribution service P-code table (Fig. 11), personal information service P-code table (Fig. 12), personal information table (Fig. 13), owner information table (Fig. 14), and terminal information table (Fig. 15).

Fig. 7 is a view showing a data structure example of
15 the IP information registration table. An IP information registration table 220 is generated and recorded when IP information is registered. In the IP information registration table 220, an identification section, basic properties, and entity information are registered in
20 correspondence with an assigned P-code. The identification section stores information representing the structure of the P-code (whether a subcode is present, and when the P-code is linked to another P-code, information representing the linked P-code). For a P-code having
25 subcodes, a plurality of types of P-codes with subcodes can be registered for the P-code. As shown in Fig. 11, each

subcode table has the same identification section, basic
 properties, and entity information as those of the IP
 information registration table. Subcode tables are
 prepared in units of P-codes having subcodes, i.e., in
 5 number corresponding to the number of P-codes having
 subcodes, and stored. The basic properties store
 information representing the owner of the IP information
 and article insertion condition. The basic properties
 include a "keyword list" and "keyword weight list" which
 10 are used by the advertisement search processing 203d
 (details will be described later). The entity information
 specifies the entity data of the IP information and includes
 the path and file name of an entity file.

In the P service system of this embodiment, the IP
 15 server 300 can issue a P-code within an allowable range.
 Hence, IP information is registered by the P service server
 200 or IP server 300. A server which has registered IP
 information holds the contents and IP information
 registration table. That is, the entity of IP information
 20 and IP information registration table are present in the
 P service server 200 or IP server 300.

Fig. 8 is a view showing a data structure example of
 the advertisement information table. The advertisement
 information table is generated and recorded when an
 25 advertiser registers advertisement information. The
 advertisement properties, link, and entity file

information of the advertisement information are stored in
correspondence with an assigned P-code. The advertisement
properties store information representing the owner of the
advertisement information and insertion conditions of the
5 advertisement information. The "link information to IP
information" of the advertisement properties stores a
target keyword list and target keyword weight list used in
the advertisement search processing 203d.

The "link" stores the P-code of advertisement
10 information to be linked. In the "entity file information",
the path name and file name for specifying the file of the
advertisement information are registered. The entity of
the advertisement information can be present in either the
P service server or IP service server. However, the
15 advertisement information table is always stored in the
P-code database 205 of the P service server 200. When the
entity of advertisement information is present in the IP
service server, information for specifying the IP service
server is included in the entity file information of the
20 advertisement information table (in this embodiment, the
IP server is specified by the P-code, and this will be
described later).

Fig. 9 is a view showing a data structure example of
a user information table. The user information table is
25 generated and recorded when the user registers
himself/herself as a member of the P service system and

includes a user profile, personal information, mail service information, distribution service information, and personal information service information. In the user profile, information representing the address and objects
5 of interest of the user. The "personal information table" in the user profile stores pointers to the personal information table in which the personal secret matters including the address, name, telephone number, and credit card number of the user are registered, as shown in Fig. 13.
10 In the mail service information, distribution service information, and personal information service information, information necessary for the mail print service, distribution service, and personal information service are registered, respectively.

15 Fig. 10 is a view showing a data structure example of a P-code table for the mail service. As shown in Fig. 10, in correspondence with the P-code for the mail service, a "mail properties" representing the subject (title) and sender of mail and entity file information representing the
20 file of mail data are registered. Referring to Fig. 10, the P-code has a parent code section "telephone number" and attached section (suffix (also to be spelled as "surfix")) "# number". The subcode herein means the "number" section in the attached section.

25 Fig. 11 is a view showing a data structure example of a P-code table for the distribution service. As shown

in Fig. 11, in correspondence with the P-code for the distribution service, the "distribution information properties" representing the title, valid dates of the distribution information, and the password given to the distribution information, and entity file information representing the distribution information file are registered. Referring to Fig. 11, the P-code has a parent code section "telephone number" and attached section (surfix) "- number". The subcode herein means the "number" section in the attached section.

Fig. 12 is a view showing a data structure example of a P-code table for the personal information service. As shown in Fig. 12, in correspondence with the P-code for the personal information service, the "personal information properties" representing the title and final print date and "registered P-code information" representing the list of registered P-codes are registered. The P-code list is a P-code group which is set and registered by the user in advance. Referring to Fig. 12, the P-code has a parent code section "telephone number" and attached section (surfix) "## number". The subcode herein means the "number" section in the attached section.

Fig. 13 is a view showing a data structure example of a personal information table. The personal information table is contained in the user information table, as described above with reference to Fig. 9.

Fig. 14 is a view showing a data structure example of an owner information table. This table is linked to the IP information registration table shown in Fig. 7 is "owner ID" in the advertisement information table shown in Fig. 8.

5 As shown in Fig. 14, information associated with the owner (information provider or advertiser) is registered.

Fig. 15 is a view showing a data structure example of a terminal information table. The terminal information table is held for each P service terminal.

10 <Arrangement of IP Server>

Fig. 16 is a block diagram showing the typical arrangement of the IP server 300. Referring to Fig. 16, a control section 301 has a CPU 302 and memory 303 and executes various processing operations in the IP server 300.

15 A display 304 displays various data under the control of the control section 301. An input section 305 comprises a pointing device such as a keyboard or mouse. A data storage section 306 stores the "entity of IP information" registered in the P service system and "IP information registration table" associated with the IP information (the
20 IP information registration table is the same as that shown in Fig. 7). A communication section 307 is connected to the P service server 200 through a line or the like.

The IP server 300 acquires an available P-code value
25 from the P service server 200 and issues a P-code when IP information is registered from the user terminal. At this

time, the entity of IP information and the IP information registration table are held by the data storage section 306. When an information request from the P service server 200 is received, the entity (contents) of the IP information is extracted in accordance with the designated P-code and transmits it to the P service server 200.

<P-Code>

The P-code used to specify information or the like in this embodiment will be described next.

10 Fig. 17 is a view for explaining the data structure of the P-code used in the P service system according to this embodiment. As shown in Fig. 17, the P-code can be divided into three sections: a "classification section", "number section", and "attached section".

15 The classification section is a 16-bit code containing a P-code type bit representing that the input P-code number is an IP P-code (information P-Code) or personal P-code (personal user P-Code), version information, and country number. When a P-code number is input to the P service terminal 100, the contents of this classification section are automatically attached by the terminal.

First, it is determined whether the input P-code is a personal P-code or IP P-code to set the P-code type bit.

25 In this embodiment, a telephone number is used as the number section of the personal P-code. If the number input to the

P service terminal 100 has 11 consecutive digits or less,
it is determined that a telephone number is input, i.e.,
a personal P-code is input, and the P-code type bit is set
at "1". On the other hand, if a number sequence hyphened
5 in units of four digits (in units of four numbers) is input
as a P-code number, it is identified that a nontelephone
number is input, and the P-code type bit is set at "0".
Subsequently, version information is set, and a country
number representing the country where the P service
10 terminal is installed is set (when a country is designated
from the P service terminal, the number of the designated
country is set).

The number section has a number (to be referred to
as a P-code number hereinafter) directly input by the user.
15 This is a number inserted to a newspaper, magazine, or
homepage by the information provider. Note that a
telephone number is used as a personal P-code number.

When the above-described P-code type bit is 1, i.e.,
a personal P-code, 40 bits are allocated to the number
20 section, as shown in Fig. 17, in which a numerical value
represented by the telephone number is input. The
remaining eight bits are used as an attached section.

On the other hand, when the flag bit is 0, i.e., an
IP P-code, 39 bits are allocated to the number section, as
25 shown in Fig. 17, and the remaining nine bits are used as
an attached section. Of the 39 bits of the number section,

the first bit represents a P service server identification bit (1 bit), and the subsequent three bits represent a class category. Since the P service server identification bit is 0 for a site except the P service server, only three bits
5 representing a class category are contained in the first four bits, and the first digit of the P-code number represents a class category (numerical values 1 to 5). The class category has the same meaning as that of an IP address. As shown in Fig. 17, numerical values 1 to 5 indicated by
10 the three bits represent five classes from minimum to maximum scales. For example, for class 1 (minimum scale), 24 bits are used as a site identification number (to also be referred to as an external code hereinafter), and the remaining 11 bits construct an ID code (to also be referred
15 to as an internal code hereinafter) freely usable in the site. When the class category is determined in accordance with the scale of an IP server, the number of P-codes assigned to the IP server is determined depending on the scale of the IP server.

20 The attached section indicates the identification number of a subcategory of the contents identified by the above classification section + number section. For an information P-code, for example, " professional baseball game result" has categories "result of today", "result of
25 yesterday ", "result of day before yesterday", ..., and "tip on horse racing" has categories "site" and "race". For a

personal P-code, the attached section is used for a mail box number or personal information number.

Especially, in this embodiment, a plurality of types of "attached sections" can be connected to one number section as suffixes. When grouping is designated for
5 P-codes, the P-code can be linked to other IP information in units of suffixes. When the code of the number section is input as a P-code, information having the maximum surfix value is selected and presented as IP information. This
10 can cope with information such as "results of professional baseball games of yesterday", which requires frequent update and addition of information". Assume that a new result of professional baseball game is generated. Next day, the game result of yesterday is grouped in
15 correspondence with a P-code with an incremented surfix, thereby linking the P-code with the incremented surfix to the IP information of the game result. Hence, when a P-code number is designated to obtain the "result of professional baseball game of yesterday", information having the maximum
20 surfix attached to the P-code number is extracted and presented to the user.

When a P-code has an attached section, it may be directly input by the user. However, instead of directly inputting the number, the P-code with an attached section
25 can be input by selecting it from a menu. More specifically, when the user inputs only the P-code number of a P-code

having an attached section, the value of the corresponding P-code (number section + attached section) and its properties (title and the like) are transmitted from the P service server to the P service terminal 100. The P service terminal 100 displays a selection list using the information on the touch panel 104 as a menu. When the user selects a desired content from the selection list, a corresponding P-code (number section + attached section) is transmitted to the P service server, and the selected content is sent to the P service terminal. In this embodiment, an example will be described, in which a personal P-code uses, as a number section, a numerical value input by the user as a "telephone number", and as an attached section, a code formed from a sequence of a "predetermined symbol" and "subcode", and "#", "-", or "##" is used as the "predetermined symbol". In this case, when the personal P-code is input, the "predetermined symbol" registered in advance is detected from the P-code, and a service predetermined in accordance with the type of the detected "predetermined symbol" is executed (a mail service for "#", distribution service for "-", and personal information service for "##").

Fig. 18 shows the structure of the above P-code.

When a P-code is stored in the memory of a portable terminal, all constituent elements ("classification section", "number section", and "attached section") of the

P-code are registered in the memory and input to the P service terminal. This enables omission of an operation such as menu selection, so load of the user can be reduced.

<Outline of Operation of System>

5 The outline of processing by the P service server of this embodiment will be described next with reference to Figs. 19 and 20.

 In steps S101 to S109, processing to be executed is selected on the basis of IP information, command, and P-code
10 input from the P service terminal 100, IP server 300, or user terminal 700. For example, when input data is a user registration request, the flow advances from step S102 to step S111 to issue a personal P-code and perform user
15 registration processing by the information registration processing 203a and P-code issue processing 203b. By this user registration processing, the user information table shown in Fig. 9 and personal information table shown in Fig. 13 are generated and registered. When an IP
20 information registration request is input, the flow advances from step S103 to step S112 to issue an IP P-code from P-codes assigned to the IP server which is requested to register the IP information. In step S113, IP
25 information registration processing is performed. By this IP information registration processing, the IP information registration table shown in Fig. 7 is generated and registered. When an advertisement information

registration request is input, the flow advances from step S104 to step S114 to issue a P-code. In step S115, advertisement information registration processing is executed. By this advertisement information registration processing, the advertisement information table as shown in Fig. 8 is generated and registered in the P service server 200.

When a P-code is input from the P service terminal 100, processing requested by the P-code is determined from processing operations in steps S105 to S109. When the P-code is an IP P-code (the P-code type bit is 0), it is determined that the information service is requested. The flow advances from step S105 to step S116 to acquire the entity and properties of IP information from the P-code and generate preview data. When the P-code is a personal P-code (the P-code type bit is 1) and is registered in the mail service information of the user information table, it is requested that the mail service is requested, and the flow advances from step S106 to step S117. In step S117, the entity and properties of mail data are acquired from the mail P-code table on the basis of the P-code.

When the input P-code is a personal P-code and is registered in the personal information service information of the user information table (Fig. 9), it is determined that the personal information service is requested, and the flow advances from step S107 to step S118. In step S118,

the list of IP P-codes is acquired by looking up the personal information service P-code table (Fig. 12), and IP information and their properties of all P-codes registered in this list are acquired.

5 When the input P-code is a personal P-code and is registered in the distribution service information of the user information table, it is determined that data extraction in the distribution service is requested, and the flow advances from step S108 to step S119. In step S119,
10 a password registered in correspondence with the data is requested. It is determined by looking up the distribution service P-code table whether an authentic password is received, and the entity and properties of distribution data corresponding to the P-code are acquired.

15 When it is determined that distribution data registration in the distribution service is requested, the flow advances from step S109 to step S123 to execute distribution data registration processing including P-code issue processing and processing of registering a password
20 corresponding to the data and notify the user of the data registration and assigned P-code. In this case, a P-code in a form of a personal P-code (telephone number) having a subcode (surfix) is issued.

 When necessary information is acquired in steps S116
25 to S119, layout of acquired information to be printed on a paper sheet is determined in step S120. In step S121,

advertisement information to be laid out in a margin on the paper sheet is acquired (advertisement information search will be described later). In step S122, the properties acquired in steps S116 to S119 and preview data of the image of each page obtained in steps S120 and S121 are transmitted to the P service terminal. When a print instruction is received from the P service terminal 100, print data is generated and transmitted to the P service terminal 100. The printer 101 prints information on the basis of the print data.

<User Registration>

When the user wants to receive the mail service or personal information service in the P service system, user registration in the P service server 200 is required in advance.

In user registration, at least matters for specifying the user must be registered. Arbitrary matters for preferable reception of each service of the P service system can also be registered. Additionally, already registered matters can be changed.

The procedure of user registration will be described by exemplifying a case wherein user registration is done from the user terminal 700 of the user through the Web.

When the user accesses user registration of the P service server 200 from the user terminal 700, the P service server 200 executes user registration processing in step

S111.

Fig. 21 is a flow chart of user registration processing.

In this user registration processing, the P service
5 server 200 displays various windows for user registration on the display of the user terminal 700 and causes the user to sequentially input matters to be registered by so-called GUI.

In step S1000, the P service server 200 determines
10 whether the user has selected new user registration or a change in user registration that has been already performed. For the former processing, the flow advances to step S1001. For the latter processing, the flow advances to step S1005.

In step S1001, new registration processing is
15 performed. In this new registration processing, a dialog box shown in Fig. 22 is displayed first on the display of the user terminal 700.

This dialog box has a "name/address" button 1000,
"password" button 1010, "place of employment" button 1020,
20 "credit card" button 1030, "service" button 1040, "personal information" button 1050, "personal information 2" button 1060, "desired information" button 1070, "printing paper" button 1080, and "favorite information registration" button 1090. The user can register matters corresponding
25 to the respective items by clicking the buttons.

When the "name/address" button 1000 is clicked in the

dialog box shown in Fig. 22, a dialog box shown in Fig. 23 is displayed. The user must input, from the user terminal 700, at least the name, address, and one of the telephone number and portable telephone number as indispensable input matters. At the end of the input, the "OK" button is clicked, the input contents are stored, and the dialog box shown in Fig. 22 is displayed again. When the "cancel" button is clicked, the dialog box shown in Fig. 22 is displayed again without storing the input contents. This also applies to processing to be described below.

When the "password" button 1010 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 24 is displayed. The user inputs a desired password to the "password" column. The password is registered to prevent a third party from using the P service system under disguised ownership. Hence, the password is an indispensable input matter in principle.

Since the input password is displayed by "*", the user is caused to input the password again to the "password (confirmation)" column to prevent any input error.

When the "place of employment" button 1020 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 25 is displayed. The user can arbitrarily input matters associated with the place of employment.

When the "credit card" button 1030 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 26

is displayed. When the user will pay a charge for the P service system using a credit card, he/she designates a credit card of his/her own in this dialog box. If no credit card is designated, it is regarded that the user will pay
5 in cash.

When the "service" button 1040 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 27 is displayed. From the mail service, personal information service, and distribution service provided by the P service
10 system, the user selects services desired based on the P-code assigned by this user registration, and checks check boxes corresponding to the services. A service without a check mark is not available on the basis of the P-code assigned by this user registration.

When the "personal information" button 1050 is
15 clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 28 is displayed. The user can arbitrary input general personal information. The information input herein is mainly used for advertisement information search
20 processing (to be described later in detail).

When the "personal information 2" button 1060 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 29 is displayed. The user can arbitrarily input specific personal information. The information
25 input herein is also mainly used for advertisement information search processing (to be described later in

detail).

When the "desired information" button 1070 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 30 is displayed. In this dialog box, items such as economy, entertainment, and sports are hierarchically listed and displayed. The user can check the check boxes of items of his/her interest. Each item can be quickly searched for by "keyword search".

The checked items are used to search for information which is to be arbitrarily provided to the user by the P service server 200 in each service of the P service system. For example, when the user receives the mail service, and an excess margin portion is present on the print, the P service server 200 can search for free IP information associated with the checked items, attach the information to the margin portion, and output it. The checked items can also be used for advertisement information search processing.

When the "printing paper" button 1080 is clicked in the dialog box shown in Fig. 22, a dialog box shown in Fig. 31 is displayed. In receiving a print output from the P service terminal 100, the user can designate the output format. For example, when the "visibility priority" button in the dialog box shown in Fig. 31 is checked, priority is given to the layout of the print, and information obtained by the P service system is printed in

a layout easy to see. When the "page count priority" check button is checked, priority is given to saving of page count, so the print cost is expected to be saved. When "details" button is clicked, desired conditions can be selected and designated from a plurality of layout patterns, the amount of advertisement information, and font sizes, which are registered on the P service system.

When the "favorite information registration" button 1090 is clicked in the dialog box shown in Fig. 22, IP information to be subjected to the personal information service can be set. This setting is done by listing IP P-codes corresponding to an IP information group desired by the user. A plurality of pieces of favorite information can be registered. The dialog box displayed at this time is the same as that for registration of a frame of the personal information service for a later description of various services and therefore is not illustrated.

When the user clicks the "OK" button in the dialog box shown in Fig. 22, the P service server 200 determines that all inputs are complete. The flow advances to step S1002 to check whether all the above-described indispensable input matters are input. If YES in step S1002, the flow advances to step S1003. If NO in step S1002, a predetermined alarming message is displayed, and the flow returns to step S1001. When the user clicks the "cancel" button, processing is ended without registration.

In step S1003, the P service server 200 issues the personal P-code. Especially, one of the portable telephone number and telephone number input by the user in the dialog box shown in Fig. 23 is attached as a "number section", and then, the P-code is sent to the user terminal 700, thereby giving the P-code to the user. This issue processing will be described later in detail with reference to Fig. 70.

In step S1004, the information input by the above processing is stored in the user information table shown in Fig. 9 in correspondence with the new personal P-code given to the user in this user registration. After that, user registration processing is ended.

When a change in user registration already performed is selected in step S1000, the flow advances to step S1005.

In step S1005, registration change processing is performed. In this registration change processing, a dialog box shown in Fig. 32 is displayed on the display of the user terminal 700 first. The dialog box shown in Fig. 32 has the same structure as that of the dialog box shown in Fig. 22. Referring to Fig. 32, buttons corresponding to the buttons 1000 to 1090 of the dialog box shown in Fig. 22 are indicated by adding "'" to the same reference numerals as in Fig. 22.

When the user clicks the buttons 1000' to 1090', dialog boxes as shown in Figs. 23 to 31 are displayed in

correspondence with the buttons. In the displayed dialog box, matters input in the past user registration are displayed together.

The user can change the displayed contents while
5 looking at them. For example, when the "password" button
1010' in Fig. 32 is clicked, a dialog box shown in Fig. 33
is displayed. The user can input a new password to the
"password" column to change the password. For
confirmation, the new password is input to the "password
10 (confirmation)" column again. After the input, the "OK"
button is clicked to store the changed contents.

When the user clicks the "OK" button in the dialog
box shown in Fig. 32, the P service server 200 determines
that all changes are made, and the flow advances to step
15 S1006 to check for confirmation whether the above-described
indispensable input matters are erased by errors upon the
change. If all the indispensable input matters have been
input, the flow advances to step S1004. If matters are
erased, a predetermined alarming message is displayed, and
20 the flow returns to step S1005.

In step S1004, the P service server 200 updates the
corresponding matters in the user information table in
accordance with the changed contents.

All user registration processing operations are
25 complete. In the above new registration processing, input
items are sequentially selected from the menu shown in

Fig. 22, and necessary matters are input. However, a so-called "wizard" form may be used to automatically sequentially display the input windows and cause the user to input necessary matters. However, to change the registered contents, the menu for selecting a desired matter as shown in Fig. 32 is preferable.

<IP Information Registration>

The information provider who provides IP information in the P service system must register contents of the IP information and the like in the P service server 200 or IP server 300.

To do this registration, the information provider accesses the P service server 200 or IP server 300 from a terminal (not shown) (to be referred to as an information provider terminal hereinafter) of the information provider through the Web or presents a storage medium such as a CD-ROM in which contents of IP information and the like are stored to the operator of the P service system.

The procedure of IP information registration will be described below by exemplifying a case wherein the information provider registers IP information in the P service server 200 through the Web.

When the information provider accesses IP information registration in the P service server 200 from the information provider terminal, the P service server 200 executes processing in step S112 in Fig. 19 and internally

issues an IP P-code for the information provider. After that, the flow advances to step S113 to execute IP information registration processing.

Fig. 34 is a flow chart of IP information registration processing.

In this IP information registration processing, the P service server 200 displays windows for IP information registration on the display of the information provider terminal and causes the information provider to sequentially input matters to be registered by so-called GUI, as in the above-described user registration processing.

In step S1010, a dialog box shown in Fig. 35 is displayed. It is determined whether the information provider is a member of the P service system. A member means a person who has made an application to the P service system in advance as an information provider. A nonmember cannot provide pay IP information. A membership number and password are assigned in accordance with an application.

When the information provider is a member, he/she checks the radio button "Yes" in this dialog box and also inputs the membership number. When the information provider is a nonmember, he/she checks the radio button "No". When "next" is clicked, the flow advances to step S1011 for a nonmember. For a member, a dialog box shown in Fig. 36 is displayed to request to input a password. If the

password input by the information provider is authentic, the flow advances to step S1012.

When "next" is clicked in each dialog box, input information is stored, and the flow advances to the next processing. When "back" is clicked, input information is stored, and the flow returns to immediately preceding processing. When "cancel" is clicked, the flow returns to the first dialog box without storing input information. This also applies to the following processing.

10 In step S1011, a dialog box shown in Fig. 37 is displayed to cause the information provider as a nonmember to input information for specifying the information provider, including the address, name, and telephone number. This process is required to prevent oversupply of
15 inappropriate IP information. After the input, when "next" is clicked, the flow advances to step S1014. After the input, a dialog box shown in Fig. 38 may be displayed to recommend member registration such that the procedure of member registration can be executed on the Web.

20 In step S1012, a dialog box shown in Fig. 39 is displayed to confirm whether the information provider as a member will charge for IP information registered by this IP information registration. If the IP information is pay information, the information provider checks the check box
25 "charge for printing" and inputs a desired charge (step S1013). If the IP information is free information, no check

box is checked. In either case, when "next" is clicked, the flow advances to step S1014.

In step S1014, a dialog box shown in Fig. 40 is displayed to designate IP information to be registered. The information provider inputs the file name of the entity contents) of IP information stored in the information provider terminal. In this case, a plurality of file names can be designated. The IP information to be registered may be either character information or an image.

When the "designate file" button is clicked, a dialog box in Fig. 41 that shows the list of IP information files stored in the information provider terminal can be displayed. In this case, the information provider can easily select an IP information file. To cancel a file selected once, the file is designated in the dialog box shown in Fig. 40, and the "delete" button is clicked. When "next" is selected in the dialog box shown in Fig. 40, the flow advances to step S1015.

In step S1015, the contents of the file designated in step S1014 are displayed as a preview (Fig. 42), and the information provider is made to confirm it. After the confirmation, when the information provider clicks the "transfer to server" button, a dialog box shown in Fig. 43 is displayed, and the designated file is transferred to the P service server 200. After the transfer, the flow advances to step S1016.

In step S1016, a property of the transferred IP information is set. In setting the property, a dialog box shown in Fig. 44 is displayed, so the date of start of insertion and valid dates of the IP information can be set.

- 5 In this setting, the valid dates of the IP P-code and those of the IP information can be independently set. The valid dates of the P-code may be automatically set by adding a predetermined period to the valid dates of the IP information, as will be described later with reference to
- 10 Fig. 73. When "next" is clicked in the dialog box shown in Fig. 44, a dialog box shown in Fig. 45 is displayed to set another property.

- In this dialog box, whether a change in size of registered IP information is allowed when it is output from
- 15 the P service terminal 100 is set.

- This setting is required because size reduction may be required on the P service terminal 100 side due to the paper of the P service terminal 100 or layout of a plurality of IP information output to one paper sheet. If the size
- 20 can be freely changed on the P service terminal 100 side, the printed contents may be unclear depending on the contents of the IP information. Hence, the information provider is allowed to set the allowable range of the font size or magnification. When "next" is selected in the
- 25 dialog box shown in Fig. 45, a dialog box shown in Fig. 46 is displayed to set still another property.

In this dialog box, whether the information provider permits automatic attachment of advertisement information when the IP information registered is output from the P service terminal 100 is set. The information provider
5 checks one of the radio buttons "permit", "permit for lower surface", "not permit" to select setting. Advertisement information is attached within the selected range. When "next" is selected in the dialog box shown in Fig. 46, a dialog box shown in Fig. 47 is displayed to set still
10 another property.

In this dialog box, a password can be set to allow only a specific user to use the registered IP information. To set a password, the check box "set password" is checked, and a desired password is input to the "password" column.
15 After input, when "next" is clicked, a dialog box shown in Fig. 48 is displayed. Re-input is requested to prevent a password input error. When the "register" button is clicked, the password is stored. When password setting is unnecessary, "next" is clicked without any processing in
20 the dialog box shown in Fig. 47. In either case, a dialog box shown in Fig. 49 is displayed to set still another property.

In this dialog box, the genre and keywords of IP information to be registered are input such that they can
25 be used for advertisement search processing. The items to be input are "genre", "subgenre", and "keyword". "Genre"

and "subgenre" are listed in drop-down list boxes. For example, when the right arrow of the "genre" column is clicked, the list of items of the "genre" column is displayed, as in a dialog box shown in Fig. 50. The
5 information provider can select from this list a category most suitable to the IP information to be registered. In addition, keywords associated with the concrete contents of the IP information registered can be arbitrarily selected and input to the "keyword" column. An input
10 keyword can be set by the "add" button, and the set keyword can be canceled by the "delete" button.

When the check box "negative link to advertisement" is checked, selection of advertisement information inappropriate to the contents of the registered IP
15 information can be avoided.

Instead of or together with setting the property in the dialog box shown in Fig. 49, a property in a dialog box shown in Fig. 51 can be set.

In the dialog box shown in Fig. 51, the title and
20 summary of the registered IP information are input. This summary is used for advertisement search processing. In addition, when the IP information is requested in the information service, the summary is temporarily disclosed to the user instead of immediately providing the entity of
25 the IP information to the user, thereby increasing the width of IP information selection by the user or reducing the

charge.

Property setting in step S1016 is ended, and the flow advances to step S1017.

In step S1017, a dialog box shown in Fig. 52A is
5 displayed to select whether the registered IP information
is to be subjected to group setting. With group setting,
pieces of IP information are associated with each other.
This processing is used to handle information having the
same object whose contents are updated over time, including
10 the results of professional baseball games and stock
information.

If group setting is not desired, the information
provider clicks the "cancel" button, and in this case, the
flow advances to step S1019.

15 If group setting is desired, whether the registered
IP information is to be added to an existing group or a new
group is selected by a radio button in the dialog box shown
in Fig. 52A.

To add the IP information to an existing group, the
20 IP P-code of the link destination is input. The P-code
displayed in the "P-code to be registered" column is the
P-code assigned to the IP information to be registered this
time.

When a new group is selected, and the "OK" button is
25 clicked, a dialog box shown in Fig. 52B is displayed. The
title, contents, and update schedule of the group are input.

The input data are finally stored in the Frame information storage area of the IP information registration table (Fig. 7).

In either case, when the "OK" button is clicked, a dialog box shown in Fig. 52C is displayed, and registration matters for group setting are displayed. This display is done when the IP information to be registered this time is added to an existing group. "Link number #77" in this display means that the IP information registered this time is also used as a P-code in which an attached section (surfix) "#77" is attached to the IP P-code (parent code section) of the link destination. That is, the IP information subjected to group setting can be accessed as the IP P-code of itself or as the IP P-code of the link destination (identified by the attached section), and the latter is mainly used to update information. When the "OK" button is clicked, the flow advances to step S1019.

In step S1019, a dialog box shown in Fig. 53 is displayed. The list of input matters is displayed together with the IP P-code assigned to the registered IP information. When the information provider confirms display and clicks the "register" button, the flow advances to step S1020.

In step S1020, the P service server 200 stores the information input by the above processing in the IP information registration table shown in Fig. 7 in correspondence with the IP P-code assigned to the

information provider. The information can also be transferred to the IP server 300 and held by the IP server 300.

When the information provider will register IP
5 information not in the P service server 200 but in the IP server 300 from the information provider terminal, registration is generally done according to the above-described procedure.

In this case, the P service server 200 allocates a
10 usable IP P-code area to the IP server 300 in advance. The IP server 300 can assign an IP P-code to the information provider from the IP P-codes in the allocated area. The IP server 300 notifies the P service server 200 of at least the assigned P-code to perform IP information registration
15 processing. This will be described later with reference to Figs. 71 to 74.

In this way, the entire IP information registration processing is ended.

<Advertisement Information Registration>

20 In the P service system, an advertisement provider who provides advertisement information must register the contents of advertisement information in the P service server 200 or IP server 300.

To do this registration, the advertisement provider
25 accesses the P service server 200 or IP server 300 from a terminal (not shown) (to be referred to as an advertisement

provider terminal hereinafter) of the advertisement provider through the Web or presents a storage medium such as a CD-ROM in which contents of advertisement information are stored to the operator of the P service system.

5 The procedure of advertisement information registration will be described below by exemplifying a case wherein the advertisement provider registers advertisement information in the P service server 200 through the Web.

When the advertisement provider accesses
10 advertisement information registration in the P service server 200 from the advertisement provider terminal, the P service server 200 executes processing in step S114 in Fig. 19 and internally issues a P-code for advertisement information. This P-code is exclusively used for internal
15 processing of the P service server 200 and therefore is not disclosed to the advertisement provider in principle.

After that, the flow advances to step S115 to execute advertisement information registration processing.

Fig. 54 is a flow chart of advertisement information
20 registration processing.

In this advertisement information registration processing, windows for advertisement information registration are displayed on the display of the advertisement provider terminal, and the advertisement
25 provider is caused to input matters to be registered by so-called GUI, as in the above-described user registration

processing and IP information registration processing.

In step S1050, a dialog box shown in Fig. 55 is displayed, and it is determined whether the advertisement provider is a member of the P service system. A member means
5 a person who has made an application as an information provider in advance. A nonmember cannot provide advertisement information because advertisement insertion is charged for. A membership number and password are assigned in accordance with an application.

10 When the advertisement provider is a member, he/she checks the radio button "Yes" in this dialog box and also inputs the membership number. When the advertisement provider is a nonmember, he/she checks the radio button "No". When "next" is clicked, the flow advances to step S1051 for
15 a nonmember. For a member, a dialog box shown in Fig. 56 is displayed to request to input a password. If the password input by the advertisement provider is authentic, the flow advances to step S1052.

When "next" is clicked in each dialog box, input
20 information is stored, and the flow advances to the next processing. When "back" is clicked, input information is stored, and the flow returns to immediately preceding processing. When "cancel" is clicked, the flow returns to the first dialog box without storing input information.
25 This also applies to the following processing.

In step S1051, a dialog box shown in Fig. 57 is

displayed to cause the advertisement provider as a nonmember to input information for specifying the advertisement provider. This is because advertisement insertion is charged for, as described above. After the input, when "next" is clicked, the flow advances to step S1052.

In step S1052, a dialog box shown in Fig. 58 is displayed to designate advertisement information to be registered. The advertisement provider inputs the file name of the entity (contents) of advertisement information stored in the advertisement provider terminal. In this case, a plurality of file names can be designated. The functions of the "designate file" and "delete" buttons are the same as in the above-described IP information registration processing shown in Fig. 40. The advertisement information to be registered may be either an image or character information.

When "next" is selected in the dialog box shown in Fig. 58, the flow advances to step S1053.

In step S1053, the contents of the designated file are displayed as a preview (Fig. 59), and the advertisement provider is made to confirm it. After the confirmation, when the advertisement provider clicks the "next ", a dialog box shown in Fig. 60 is displayed, and the designated file is transferred to the P service server 200. After the transfer, the flow advances to step S1054.

In step S1054, a property of the transferred advertisement information is set. In setting the property, a dialog box shown in Fig. 61 is displayed, so the date of start of insertion and valid dates (due date of insertion) of the advertisement information can be set. When "next" is clicked in the dialog box shown in Fig. 61, a dialog box shown in Fig. 62 is displayed to set another property.

In this dialog box, a method of linking the advertisement information to IP information in which insertion of the advertisement information is requested is set. In accordance with the display of the dialog box, insertion of the advertisement information into IP information common in association with any one of the region, age group, sex, and keyword or contents of information can be designated. For example, when "region" is selected, and the "set details" button is clicked in Fig. 62, a dialog box shown in Fig. 63 is displayed, and specific region setting can be done. When "next" is selected in the dialog box shown in Fig. 63, a dialog box shown in Fig. 64 is displayed to set still another property.

In this dialog box, the size and the like of the advertisement information transferred to the P service server 200 are displayed. The advertisement provider can designate the size in printing, enable/disable state of enlargement/reduction of advertisement information, and print position. For example, when the right arrow of the

drop-down list box of the print size selection column is
clicked, the list of print sizes is displayed, as shown in
Fig. 65, and the advertisement provider can select a
desired print size. When "next" is selected in the dialog
5 box shown in Fig. 64, a dialog box shown in Fig. 66 is
displayed to set still another property.

In this dialog box, the insertion scheme of the
advertisement information to be printed is set. The
advertisement provider can check the check box of a desired
10 limitation item to impose the limitation. Except the
limitation items shown in Fig. 66, a limitation may be
imposed on a change in contents corresponding to color or
monochrome print, insertion at the same position when a
plurality of pages are printed, or generation of a series
15 of advertisement information. When "next" is selected in
the dialog box shown in Fig. 66, a dialog box shown in
Fig. 67 is displayed to set still another property.

In this dialog box, a charge for insertion of the
advertisement information is set. In this dialog box, a
20 charge per insertion of advertisement information is
displayed, and the limit of the total charge can be
designated by setting the print count or the upper limit
of charge for insertion. When the radio box "designate
maximum print count" is checked, the count can also be
25 designated. When the radio box "designate upper limit of
advertisement charge " is checked, the upper limit of charge

for insertion can also be designated.

Property setting in step S1054 is ended, and the flow advances to step S1055.

In step S1055, a dialog box shown in Fig. 68 is
5 displayed. The list of input matters is displayed. The
P-code is not displayed in principle. When the
advertisement provider confirms the display and clicks the
"register" button, the flow advances to step S1056. When
the "register" button is clicked, a dialog box shown in
10 Fig. 69 may be displayed to allow the advertisement
provider terminal to print the particulars of the
registered advertisement information.

In step S1056, the P service server 200 stores the
information input by the above processing in the
15 advertisement information table shown in Fig. 8 in
correspondence with the P-code issued in advance. The
information may be transferred to the IP server 300. The
P service server 200 always holds the properties
(advertisement information table) of the registered
20 advertisement information. However, the entity
(contents) itself can be held by either the P service server
200 or IP server 300.

When the advertisement provider will register
advertisement information not in the P service server 200
25 but in the IP server 300 from the advertisement provider
terminal, registration is generally done according to the

above-described procedure.

In this case, the P service server 200 allocates a usable P-code area to the IP server 300 in advance. The IP server 300 can assign a P-code from the P-codes in the allocated area. The IP server 300 finally transfers the assigned P-code and its table information to the P service server 200 to perform advertisement information registration processing.

In this way, the entire advertisement information registration processing is ended.

<P-code Issue Processing>

P-code issue processing in steps S111, S112, and S114 in Fig. 19 will be described next.

Fig. 70 is a flow chart for explaining the personal P-code issue procedure in step S111.

When user information is registered, one of the portable telephone number, telephone number, and FAX number of the user is input by the above-described procedure according to GUI. For a personal P-code, one of the input numbers is used for the number section (P-code number) of the P-code. In this embodiment, priority is given in the order of the portable telephone number, telephone number, and FAX number. Hence, when a plurality of numbers are input by the user, the number used for the number section of the P-code is determined in accordance with this priority. For example, when a portable telephone number and telephone

number are input, the portable telephone number with a higher priority is used to issue a P-code.

When the portable telephone number is input, the flow advances from step S3001 to step S3004 to extract the portable telephone number. If not the portable telephone number but the telephone number is input, the flow advances from step S3002 to step S3005 to extract the telephone number. If only the FAX number is input, the flow advances from step S3003 to step S3006 to extract the FAX number.

10 If none of the portable telephone number, telephone number, and FAX number are input, the flow advances to error processing in step S3009 to prompt the user to input at least one of the portable telephone number, telephone number, and FAX number.

15 When the number is extracted in one of steps S3004, S3005, and S3006, it is checked in step S3007 whether the extracted number is not common to a used personal P-code. If NO in step S3007, the flow advances to step S3009 to notify the user of it. When the extracted number is unique in the

20 personal P-code, the flow advances from step S3007 to step S3008 to determine the extracted number as the number section of the P-code and assign the P-code to the user.

In this way, the personal P-code is determined on the basis of the portable telephone number, telephone number,

25 or FAX number of the user.

IP P-code issue in step S112 in Fig. 19 will be

described next. An IP P-code is issued by the P service server 200 or IP server 300.

To issue an IP P-code by the IP server 300, personal information ID number (internal code) is connected to a site number (external code) assigned to the IP server in advance to generate a P-code. More specifically, each IP server has a site number (external code, Fig. 18) assigned from the P service server 200. In accordance with an IP information registration request, the IP server 300 assigns an internal code and links the external code to the internal code to obtain one P-code. The number of P-codes that can be assigned by the IP server equals the number of internal codes. Hence, processing of assigning an external code to the IP server will be described first, and IP P-code issue processing will be described then.

Fig. 71 is a flow chart for explaining a procedure in which the P service server assigns the external code of a P-code to the IP server.

In step S3021, when a P-code request is received from the IP server, the site scale is determined in step S3022 (the site scale is determined in accordance with a scale request from the IP server). When the site scale is determined, four bits from the 17th bit to the 20th bit in Fig. 18 are determined (since the code is to be assigned to an external server, the 17th bit (server identification bit) is "0"). In step S3023, the code value of the external

code section determined in accordance with the site scale determined in step S3022 is determined. For example, when the site scale is medium, the 21st to 36th bits are used as bits for the external code, as shown in Fig. 18, so a
5 code value represented by 16 bits is determined. The code value determined herein is a code that has not been assigned yet to another side at that time.

Fig. 72 is a view showing the data structure of a P-code use registration table used in this embodiment.
10 This P-code user registration table is held by the P service server 200. As shown in Fig. 72, external codes already assigned to sites (IP servers) and the URLs of the sites are registered in correspondence with each other in units of site scales including the minimal scale, small scale,
15 medium scale, large scale, and maximal scale. In step S3023, an unused external code is detected by looking up the P-code use registration table and determined as an external code to be assigned. As information to be registered in correspondence with an external code, information capable
20 of specifying the database which stores information in the IP server, i.e., database identification information (address) suffixes, and a URL need not always be used. This is because information to be provided in accordance with designation of a P-code in the system is not always present
25 on the Web.

In step S3024, the site that has requested a P-code

is notified of the value determined in steps S3022 and S3023 as an external code. Upon receiving the site number (external code) from the P service server 200, the site that has requested a P-code can issue a P-code corresponding to IP information using personal information ID bits (internal code) according to the site scale.

In step S3025, the P-code use registration table shown in Fig. 72 is updated. More specifically, in the external code determined in steps S3022 and S2023 and the URL (database identification information) of the site that has requested a P-code are registered in the P-code use registration table shown in Fig. 72 in correspondence with each other. When an IP P-code is designated later from the P service terminal 100, the P service server 200 can know the site that is to be notified of the designated P-code to obtain information by looking up this P-code use registration table.

P-code issue processing in the server (P service server or IP server) which has received an IP information registration request will be described net. In the following processing example, a P-code is issued using a P-code use table in which the valid date of each P-code is registered.

Fig. 73 is a view showing the data structure of the P-code use table. Each IP server holds a P-code use table as shown in Fig. 73 and looks it up in issuing a P-code.

The number section of a P-code (for an IP server, a number obtained by linking an external code and internal code; for the P service server 200, a number represented by the 17th to 55th bits) and the valid dates of the code are registered
5 in the P-code use table. As the valid dates of the code, the same data as the "valid dates of code" in the IP information registration table shown in Fig. 7 is used. In registering IP information, dates set by the information provider by GUI in Fig. 44 are registered as the valid dates
10 of the code. Alternatively, a date after a predetermined period from the valid dates of information set by the information provider in IP information registration, e.g., a date after three months is automatically set. With this setting, a nonuse period of the P-code is given, and
15 contents to which the same P-code is assigned can be prevented from largely changing after a certain day. Since a common external code is used in one site, only the internal code may be recorded in the column "number section of P-code" of the P-code use table.

20 For a personal P-code in the P service server 200, the number section of the P-code is constructed by a 40-bit code section. For this reason, the code represented by 40 bits is registered in the column "number section of P-code".

Fig. 74 is a flow chart for explaining IP-code issue
25 processing. When an IP information registration request is received, and step S112 in Fig. 19 is executed, a P-code

usable in the server is detected by looking up the
above-described P-code use table in step S3041. In step
S3042, one of the usable P-codes is determined and assigned
to the IP information. To assign a P-code by the IP server,
5 the above-described P-code use table is searched to acquire
an unused internal code. The internal code is linked to
the external code of the IP server, class category code
(code representing the site scale), and server
identification bit (= 0) to determine a P-code to be issued
10 and assigned to the information. To assign a P-code by the
P service server 200, a 39-bit unused code is connected to
the identification bit (17th bit = 1) to obtain a P-code,
as shown in Fig. 18.

An unused P-code means a P-code whose "term of
15 validity of code" has expired. To determine whether a
P-code is unused, the table may be searched for a P-code
that has expired at the time of issue. Alternatively, time
information of year, month, and day may be always compared
with the valid dates of code in the table, and an unuse
20 identifier may be stored in the table when the code has
expired.

In step S3043, the P-code use table in the server is
updated. More specifically, the newly assigned P-code is
stored, and the valid dates of the P-code are set at the
25 valid dates designated at the time of IP information
registration, or at a date after a predetermined period

(e.g., after three months) from the valid dates of the IP information set by the information provider.

In this way, an IP P-code is issued. In issuing an IP P-code, the valid dates of the code are looked up. In
5 extracting information corresponding to the designated IP P-code, it is checked whether the current time falls within the range between the "date of start of insertion" and "valid dates of information", which are registered in the IP information registration table (Fig. 7) of the P-code.

10 In this example, to perform issue processing at a high speed, a table as shown in Fig. 73 is prepared. However, since the valid dates of the code are registered in the IP information registration table shown in Fig. 7, a P-code may be issued by looking up this table. Additionally, for
15 example, an IP code usable in the server may be temporarily issued for information registration, and it may be determined whether the temporarily issued code can be used, by looking up the valid dates of the code registered in the IP information registration table. In this case, it is
20 determined whether the time (year, month, and day) of temporary code issue is before the valid dates of the code. If it is determined that the code has expired, issue of the IP code is inhibited, and temporary issue of another IP code and determination are repeated until an IP code is finally
25 issued.

The procedure of issuing a P-code for advertisement

information is basically the same as the procedure of issuing a P-code for IP information.

<Description of Various Services>

Details of information acquisition processing (to be referred to as an information service hereinafter) in step S116, mail data acquisition processing (to be referred to as a mail service hereinafter) in step S117, personal information acquisition processing (to be referred to as a personal information service hereinafter) in step S118, distribution data acquisition processing (to be referred to as a distribution service (reception of registered information) hereinafter) in step S119, and distribution information registration processing (to be referred to as a distribution service (registration of information) hereinafter) in step S123, and examples of display windows displayed on the touch panel 104 of the P service terminal 100 in executing each processing will be described next.

An initial window for executing the services will be described first with reference to Fig. 75.

Referring to Fig. 75, an initial window 2000 has buttons 2001 to 2004. To execute the information service, mail service, personal information service, or distribution service (reception of registered information), a P-code for executing the service is input using one of the buttons 2001 to 2003. The button 2001 is pressed to input a P-code using the touch panel 104. The button 2002

is pressed to input a P-code using the portable terminal 400. The button 2003 is pressed to input a P-code using the bar code reader 107. The button 2004 is pressed for the distribution service (registration of information) (to
5 be described later).

When the button 2001 in the initial window 2000 is pressed, a window 2005 shown in Fig. 76 is displayed.

The window 2005 is a P-code input window in which a P-code for executing various services including the
10 information service, mail service, distribution service (reception of registered information), and personal information service is input.

The window 2005 has a ten-key group 2006. A desired P-code is input using the keys of the ten-key group 2006.
15 The input P-code is displayed in an area 2007. After the end of input, a button 2008 is pressed to acknowledge the input P-code. To cancel the input P-code, a button 2009 is pressed to delete the P-code displayed in the area 2007. To correct the input P-code, a button 2010 is pressed to
20 correct the P-code to be corrected using a cursor (not shown) on the area 2007. A button 2011 is pressed to input a P-code associated with foreign information.

When the button 2008 is pressed, the structure of the input P-code is determined. On the basis of the
25 determination result, a window for executing various services including the information service, mail service,

distribution service (reception of registered information), and personal information service or a window 2012 shown in Fig. 77 is displayed. If the input P-code has expired, a window (not shown) for notifying the user of it is

5 displayed.

The window 2012 shown in Fig. 77 has a ten-key group 2013 for inputting a password and buttons 2015 to 2017. In an area 2014, "*" is displayed as the password is input.

When the button 2015 is pressed after completion of
10 password input, a window for executing various services including the information service, mail service, distribution service (reception of registered information), and personal information service is displayed on the basis of the determination result of the structure of the P-code
15 input in the window 2005 in Fig. 76. In this embodiment, a P-code input as a number sequence hyphenated in units of four digits (in units of four numbers) is determined as a "nontelephone number" (IP P-code), and a P-code input as another type of number sequence (unhyphenated number sequence
20 or a number sequence hyphenated in units of digits other than four digits) is determined as a "telephone number" (personal P-code).

When it is determined that the input P-code is "telephone number#Subcode", a window for executing the mail
25 service is displayed. When the input P-code is "telephone number-Subcode", a window for executing the distribution

service (reception of registered information) is displayed.

When the input P-code is "nontelephone number", a window for executing the information service is displayed.

5 When the input P-code is "telephone number##Subcode", a window for executing the personal information service is displayed.

10 When the button 2002 in the initial window 2000 shown in Fig. 75 is pressed, a window 2018 shown in Fig. 78 is displayed.

15 The window 2018 is a P-code input window by the portable terminal 400. After completion of input, when a button 2019 is pressed, the structure of the input P-code is determined. On the basis of the determination result, a window for executing various services including the information service, mail service, distribution service (reception of registered information), and personal information service or the window 2012 shown in Fig. 77 is displayed. To cancel the input P-code, a button 2020 is
20 pressed. If the input P-code has expired, a window (not shown) for notifying the user of it is displayed.

When the button 2003 in the initial window 2000 shown in Fig. 75 is pressed, a window 2021 shown in Fig. 79 is displayed.

25 The window 2021 is a P-code input window by the bar code reader 107. After completion of input, when a button

2022 is pressed, the structure of the input P-code is determined. On the basis of the determination result, a window for executing various services including the information service, mail service, distribution service
5 (reception of registered information), and personal information service or the window 2012 shown in Fig. 77 is displayed. To cancel the input P-code, a button 2023 is pressed. If the input P-code has expired, a window (not shown) for notifying the user of it is displayed.

10 Windows displayed on the basis of the determination result of the structure of the input P-code will be described next.

A window for executing the information service, which is displayed when the input P-code is a nontelephone number,
15 will be described first with reference to Fig. 80.

When the input P-code is an IP P-code, the contents of information corresponding to the IP P-code are displayed in a window 2025. More specifically, in an area 2027, P-codes, titles of information corresponding to the P-codes,
20 the number of pages, printing charges, and printing conditions (in this embodiment, color or monochrome printing and the presence/absence of printing can be particularly designated as printing conditions, for which buttons 2027a to 2027c are prepared) are displayed.

25 In an area 2028, charge information in printing the information displayed in the area 2027 is displayed. The

area 2028 has a button 2028a which is pressed to print an advertisement together with the information. When the button 2028a is pressed, a window shown in Fig. 28 is displayed to set advertisement insertion conditions. This window will be described later in detail.

A button 2029 is pressed to display the print preview of information to be printed. A button 2030 is pressed to print information to be printed. A button 2031 is pressed to display the preceding window. A button 2032 is pressed to cancel the contents set in the window 2025. A button 2026 is pressed to input another P-code. When the button 2026 is pressed, the window 2005 shown in Fig. 76 is displayed again.

When the button 2029 is pressed, a window 2033 shown in Fig. 81 is displayed.

In the window 2033, an area 2034 is a preview area where the contents of information to be printed are displayed. A button 2035 is pressed to display the next page of information to be printed. A button 2036 is pressed to display the preceding page of information to be printed. A button 2037 is pressed to display the main window (in this embodiment, the window 2025 shown in Fig. 80).

When the button 2028a in the window 2025 shown in Fig. 80 is pressed, a window 2038 shown in Fig. 82 is displayed.

In the window 2038, insertion conditions of

advertisements to be printed together with information to be printed are set. In the window 2038, the insertion condition set item group (in this embodiment, "print in free space of article", "print on lower surface", and "print another page") is displayed. The presence/absence of execution of each item can be designated by a button group 2039. A button 2040 is pressed to acknowledge the set insertion conditions. A button 2041 is pressed to cancel the set insertion conditions.

10 In the window 2038, the user can set the advertisement insertion conditions. Instead, the P service server 200 may search for an appropriate advertisement for information to be printed such that the charge for printing the information to be printed is nullified, and generate print data constructed by the searched advertisement and information to be printed. Advertisement search processing by the P service server 200 will be described later.

20 Next, a window for executing the mail service, which is displayed when the input P-code is "telephone number#Subcode", and a window for executing the distribution service (reception of registered information), which is displayed when the input P-code is "telephone number-Subcode", will be described with reference to Fig. 83.

25 In this embodiment, it is determined, by identifying

a predetermined symbol contained in the P-code, whether the surfix portion attached to the telephone number is "#Subcode", "-Subcode", or "##Subcode", thereby determining the service to be executed: the mail service, distribution service, or personal information service. Instead, the type of service to be executed may be determined by the P service server 200 on the basis of the input personal P-code by directly looking up the P-code table shown in Figs. 10, 11, and 12, and on the basis of the determination result, a window to be displayed (an operation window associated with the service) may be determined.

A window for executing the mail service will be described with reference to Fig. 83.

A window 2042 is a window for displaying the contents of user's mail corresponding to a personal P-code represented by the input P-code. More specifically, in an area 2046, the surfix (#n, n: 0, 1, 2, ...) in an input P-code, the subject of mail corresponding to the P-code, sender, the number of pages, printing conditions (in this embodiment, color or monochrome printing and the presence/absence of printing can be particularly designated as printing conditions, for which buttons 2046a to 2046c are prepared) are displayed.

In an area 2047, the printing contents of mail to be printed in the area 2046 are displayed. In addition to this

area, the button 2028a in the window 2025 shown in Fig. 80 may be displayed to allow the user to set insertion of an advertisement to the mail, or an appropriate advertisement for the mail to be printed may be searched by the P service server 200.

5. A button 2048 is pressed to display a print preview of mail to be printed. When the button 2048 is pressed, the window shown in Fig. 81 described above is displayed. A button 2049 is pressed to set print options for mail to be printed. When the button 2049 is pressed, a window shown in Fig. 84 is displayed to set print options. This window will be described later in detail. A button 2050 is pressed to print mail to be printed. A button 2051 is pressed to display the preceding window. A button 2052 is pressed to cancel contents set in the window 2042.

A button 2043 is pressed to print all mail messages managed by the P service server 200. A button 2044 is pressed to display, of mail messages out of the area 2046, the contents of mail messages with smaller surfix numbers. A button 2045 is pressed to display, of mail messages out of the area 2046, the contents of mail messages with larger surfix numbers.

In this embodiment, when the surfix number (#n) attached to the telephone number, i.e., the input P-code, is "0", mail messages corresponding to the surfix number are displayed as many as possible, as shown in the area 2046.

If the surfix has a number other than "0", a mail message corresponding to a surfix matching the number is displayed. In a window for executing the distribution service (reception of registered information), which is displayed
5 when the input P-code is "telephone number-Subcode", in the area 2046, display of contents of information registered in the distribution service is controlled in accordance with the surfix number, as in displaying the contents of mail. Although not illustrated, a function of deleting
10 mail without printing the mail information is provided.

The window 2053 is a window for setting print options of mail to be printed. As shown in Fig. 84, an item group settable as print options (in this embodiment, "continuously print mail messages on one paper sheet" and
15 "densely print with smallest letters") are displayed in the window 2053. The presence/absence of execution of each item can be designated by a button group 2054. A button 2055 is pressed to acknowledge the set print options. A button 2056 is pressed to cancel the set print options.

20 A window for executing the personal information service, which is displayed when the input P-code is "telephone number##Subcode", will be described next with reference to Fig. 85.

When the input P-code represents the personal
25 information service, the contents of the personal information service are displayed in a window 2057. More

specifically, in an area 2061, surfixes (##m, m: 0, 1, 2,...) in the input P-codes, contents of information corresponding to the P-codes, the number of pages, and buttons 2061a and 2061b for setting the presence/absence of printing are displayed.

In an area 2062, the print contents of information to be printed in the area 2061 are displayed.

An information group managed by a surfix (##m) is called a frame.

10 A button 2063 is pressed to register a new frame or change the contents of a registered frame. When the button 2063 is pressed, a window shown in Fig. 86, which is used to register/change information, is displayed. This window will be described later in detail. A button 2064 is pressed to display a print preview of a frame to be printed. A button 2065 is pressed to print a frame to be printed. A button 2066 is pressed to display the preceding window. A button 2067 is pressed to cancel contents set in the window 2057.

20 A button 2058 is pressed to print all frames managed by the P service server 200. A button 2059 is pressed to display, of frames out of the area 2061, the contents of frames with smaller surfix numbers. A button 2060 is pressed to display, of frames out of the area 2061, the contents of frames with larger surfix numbers.

In this embodiment, when the surfix number (##m)

attached to the telephone number, i.e., the input P-code,
is "0", frames corresponding to the surfix number are
displayed as many as possible, as shown in the area 2061.
If the surfix has a number other than "0", a frame
5 corresponding to a surfix matching the number is displayed.

When the button 2063 is pressed, a window 2068 shown
in Fig. 86 is displayed.

The window 2068 has a ten-key group 2070 for
designating a surfix (##m) to be registered or changed, and
10 an area 2071 for displaying the input surfix (##m).
Especially, to register a new frame, a button 2069 is
pressed. A button 2072 is pressed to acknowledge the input
surfix (##m). A button 2073 is pressed to cancel the input
surfix (##m). A button 2074 is pressed to correct the input
15 surfix (##m).

When the button 2072 or 2069 is pressed, a window 2075
shown in Fig. 87 is displayed.

The window 2075 is a window for displaying the
contents of an information group managed by a frame
20 corresponding to the surfix (##m) input to the area 2071.
More specifically, P-codes managed by the frame, contents
corresponding to the P-codes, and buttons 2078a and 2078b
for setting the presence/absence of registration are
displayed in an area 2078.

25 A button 2079 is pressed to register another
information (P-code) in this frame. When the button 2079

is pressed, the above-described window for registering a P-code, shown in Fig. 76, is displayed. When the ten-key group 2069 shown in Fig. 86 is pressed to register a new frame, the area 2078 is blank because no information is managed by the frame corresponding to the input surfix (##m).

A button 2080 is pressed to acknowledge the registered state of information of the frame to be registered. A button 2081 is pressed to display the preceding window. A button 2082 is pressed to cancel contents set in the window 2075.

When the button 2080 is pressed, a window 2083 shown in Fig. 88 is displayed.

The window 2083 is a window for setting the size of a paper sheet used to print a registered frame. In areas 2084, 2085, and 2086, the sizes of paper sheets usable for printing are displayed. When the user presses the area of a desired paper size, display of the pressed area is inverted to notify the user of designation of the paper size. Buttons 2087 and 2088 are used to set the direction (landscape or portrait) of the paper sheet to be used. A button 2089 is pressed to acknowledge the designated size and direction of the paper sheet to be used for printing. A button 2090 is pressed to display the preceding window. A button 2091 is pressed to cancel contents set in the window 2083.

Windows for executing the distribution service (registration of information) which is executed when the button 2004 in the initial window 2000 shown in Fig. 75 is pressed will be described sequentially.

5 When the button 2004 in the initial window 2000 is pressed, a window 2092 shown in Fig. 89 is displayed.

 The window 2092 is a P-code input window in which a P-code (user's telephone number) for executing the distribution service (registration of information) is
10 input.

 The window 2092 has a ten-key group 2093. A P-code is input using the keys of the ten-key group 2093. The input P-code is displayed in an area 2094. To acknowledge the input P-code, a button 2095 is pressed. To cancel the input
15 P-code, a button 2096 is pressed to erase the P-code displayed in the area 2094. To correct the input P-code, a button 2097 is pressed to correct the P-code to be corrected using a cursor (not shown) on the area 2094. A button 2098 is pressed to input a foreign P-code.

20 When the button 2095 is pressed, a window 2099 shown in Fig. 90 is displayed. If the input P-code has expired, a window (not shown) for notifying the user of it is displayed.

 Constituent elements 2100 to 2104 in the window 2099
25 and functions thereof correspond to those of the constituent elements 2013 to 2017 in the window 2012 shown

in Fig. 77, respectively, and a detailed description thereof will be omitted.

When the button 2102 in the window 2099 shown in Fig. 90 is pressed, a window 2105 shown in Fig. 91 is
5 displayed.

The window 2105 is a window for selecting an information registration method in the distribution service (registration of information). A button 2106 is pressed to register information using a scanner. A button
10 2107 is pressed to register information using an external device. When one of the buttons is pressed, a window corresponding to the button is displayed. These windows will be described later in detail. A button 2108 is pressed to display the preceding window. A button 2109 is pressed
15 to cancel registration of information.

When the button 2106 is pressed, a window 2110 shown in Fig. 92 is displayed.

The window 2110 is a window for instructing the user to set an original to be registered on the scanner 102. A
20 button 2111 is pressed to execute an input operation for the set original. When the button 2111 is pressed, a window 2114 shown in Fig. 93 is displayed. A button 2112 is pressed to display the preceding window. A button 2113 is pressed to cancel the input operation for the set original.

25 When the button 2107 in the window 2105 shown in Fig. 91 is pressed, the same window as the dialog box shown

in Fig. 40 is displayed, so information can be registered using an external device such as the disk unit 108 or infrared communication section 105. When information to be registered is designated, and "next" is selected, the
5 window 2114 shown in Fig. 93 is displayed. The information to be registered can be either an image or character information.

The window 2114 shown in Fig. 93 is a window for displaying a preview of information to be registered. In
10 an area 2115, a preview of information to be registered is displayed. A button 2116 is pressed to display a preview of information next to the information that is currently being displayed. A button 2117 is pressed to register another information. When this button is pressed, the
15 window shown in Fig. 91 is displayed. A button 2118 is pressed to cancel registration of the information displayed in the area 2115. A button 2119 is pressed to register the information displayed in the area 2115.

When the button 2119 is pressed, a window 2120 shown
20 in Fig. 94 is displayed.

The window 2120 is a window for setting a password requested when another user prints the information to be registered. This window has a ten-key group 2121, and a desired password is input using the keys of the ten-key
25 group 2121. As the password is input, the password is displayed in an area 2122. After completion of input, to

acknowledge the input password, a button 2123 is pressed.
To cancel the input password, a button 2124 is pressed. To
correct the input password, a button 2125 is pressed to
correct the password to be corrected using a cursor (not
5 shown) on the area 2122.

When the button 2123 is pressed, a window 2126 shown
in Fig. 95 is displayed.

The window 2126 is a window for setting the valid dates
of the information to be registered. A button 2127 is
10 pressed to validate the information until tomorrow. A
button 2128 is pressed to validate the information for one
week. A button 2129 is pressed to validate the information
for one month. A button 2130 is pressed to display the
preceding window. A button 2131 is pressed to cancel
15 setting of the valid dates of the information to be
registered.

When one of the buttons 2127, 2128, and 2129 is pressed,
a window 2132 shown in Fig. 96 is displayed.

The window 2132 is a window for causing the user to
20 confirm the registered contents of the information to be
registered. More specifically, in an area 2133, the P-code,
password, data amount, valid dates corresponding to the
information to be registered are displayed. A button 2134
is pressed to acknowledge the registered contents of the
25 information to be registered. A button 2135 is pressed to
display the preceding window. A button 2136 is pressed to

cancel the registered contents of the information to be registered. When the registered contents of the information to be registered are acknowledged, the number of registered data set in the user information table shown
5 in Fig. 9 for the distribution service is incremented by one, and the P-code (P-code in the form of "telephone number-Subcode") attached to the registered information is added to the P-code list of the distribution service information. In addition, the information displayed in
10 the area 2133 is registered in the distribution information P-code table shown in Fig. 11.

A window 2200 shown in Fig. 97 is displayed in accordance with the window displayed to execute various services including the information service, mail service,
15 distribution service (reception of registered information), personal information service, and distribution service (registration of information).

The window 2200 is a window for selecting a settlement method for a charge generated when the information service,
20 mail service, distribution service (reception of registered information), personal information service, or distribution service (registration of information) is executed. The charge is displayed at the lower left side of the window. The user presses a button 2201 to pay the
25 charge in cash, a button 2202 to pay using a credit card, a button 2203 to pay by online settlement, a button 2204

to pay using a debit card, or a button 2205 to pay using a prepaid card. A window (not shown) necessary for settlement is displayed as one of the buttons is pressed.

A button 2206 is pressed to display the preceding
5 window. A button 2207 is pressed to cancel execution of selection of the settlement method.

The above-described windows displayed to execute various services including the information service, mail service, distribution service (reception of registered
10 information), personal information service, and distribution service (registration of information) are examples of main windows displayed in executing operation. In the process of operation, various windows including a window for causing the user to confirm displayed contents
15 and a window for input are appropriately displayed.

Next, processing flows for executing various services including the information service, mail service, distribution service (reception of registered information), personal information service, and distribution service
20 (registration of information) will be described sequentially.

In the following processing flows, the P service server 200 looks up the tables shown in Figs. 7 to 15 and transmits information corresponding to a P-code received
25 from the P service terminal 100 or data (property data or preview image) necessary for the information to the P

service terminal 100. In addition, in accordance with data such as a print instruction for information corresponding to a P-code transmitted from the P service terminal 100, the contents of the tables shown in Figs. 7 to 15 are
5 updated.

A processing flow for executing the information service will be described first with reference to Figs. 98A and 98B.

Fig. 98A is a flow chart showing a processing flow
10 for executing the information service of this embodiment. Fig. 98B is a view showing the processing sequence in the service system for executing the information service of this embodiment.

In step S2501, (1) the user acquires a P-code by the
15 portable terminal 400. (2) The user moves to the P service terminal 100 while keeping the P-code stored in the portable terminal 400. (3) The P-code is input to the P service terminal 100 (Figs. 75, 76, 78, and 79). (4) P service terminal 100 transmits the input P-code and the terminal
20 properties (e.g., location of installation and printer performance) of the P service terminal 100 itself to the P service server 200.

In step S2502, (5) the P service server 200 acquires information corresponding to the received P service server
25 200. In step S2503, (6) the P service server 200 transmits the contents of the information, including the property

data such as the service type, preview image, and the number of pages, to the P service terminal 100. (7) The P service terminal 100 displays the received contents of the information, including the property data, preview image, and the number of pages, on the touch panel 104 (Fig. 80). If a print preview or setting for advertisements is instructed, corresponding windows (Figs. 81 and 82) are appropriately displayed to receive inputs from the user.

In step S2504, (8) it is determined whether printing of the displayed information is instructed. (9) If cancel of printing is instructed (NO in step S2504), the P service terminal 100 transmits a message representing that cancel is instructed to the P service server 200, and processing is ended. On the other hand, (9) when printing is instructed (YES in step S2504), the P service terminal 100 requests the P service server 200 to prepare print data of the information corresponding to the P-code, and the flow advances to step S2505.

In step S2505, it is determined whether the information to be printed is charged for. (10) If the information is free (NO in step S2505), the flow advances to the next processing. (11) If the information is charged for (YES in step S2505), the flow advances to step S2506 to receive the settlement method for settlement processing in printing from the user. (12) In accordance with the settlement method, the P service terminal 100 and P service

server 200 exchange necessary data (Fig. 97). The P service terminal 100 receives the print data of the information to be printed from the P service server 200 and prints the data.

5 A processing flow for executing the mail service will be described next with reference to Fig. 99A.

Fig. 99A is a flow chart showing a processing flow for executing the mail service of this embodiment.

Fig. 99B is a view showing the processing sequence in the
10 service system for executing the mail service of this embodiment. Assume that mail information to be output is transferred from the IP server (mail server) to the P service server in advance.

In step S2601, (1) the user acquires a P-code by the
15 portable terminal 400. (2) The user moves to the P service terminal 100 while keeping the P-code stored in the portable terminal 400. (3) The user inputs the P-code to the P service terminal 100 (Figs. 75, 76, 78, and 79). (4) The P service terminal 100 transmits the input P-code and the
20 terminal properties (e.g., location of installation and printer performance) of the P service terminal 100 itself to the P service server 200.

In step S2602, (5) when the P service server 200 recognizes that the received P-code is a P-code for the mail
25 service, (6) the P service terminal 100 requests the user to input the password (Fig. 77). In step S2603, (7) the

password is confirmed. If the password is not correct (NO in step S2603), the user is requested to re-input the password. However, if an incorrect password is input a plurality of number of times, processing is ended. If the
5 password is correct (YES in step S2603), the flow advances to step S2604.

In step S2604, (8) the P service server 200 acquires mail corresponding to the received P-code. In step S2605, the P service server 200 transmits contents of the acquired
10 mail, including property data (sender and subject), to the P service terminal 100. (9) The P service terminal 100 displays the received contents of mail including the property data on the touch panel 104 (Fig. 83). If a print preview or option setting is instructed, corresponding
15 windows (Fig. 81 and 84) are appropriately displayed to receive inputs from the user.

In step S2606, it is determined whether printing of the displayed mail is instructed. (11) If cancel of printing is instructed (NO in step S2606), the P service
20 terminal 100 transmits a message representing that cancel is instructed to the P service server 200, and processing is ended. On the other hand, (11) when printing is instructed (YES in step S2606), the P service terminal 100 requests the P service server 200 to prepare print data of
25 the mail corresponding to the P-code, and the flow advances to step S2607.

In step S2607, it is determined whether the mail to be printed is charged for. (12) If the mail is free (NO in step S2607), the flow advances to the next processing. (13) If the mail is charged for (YES in step S2607), the flow advances to step S2608 to receive the settlement method for settlement processing in printing from the user. (14) In accordance with the settlement method, the P service terminal 100 and P service server 200 exchange necessary data (Fig. 97). In step S2609, the P service terminal 100 receives the print data of the mail to be printed from the P service server 200 and prints the data. When printing is ended in step S2610, the printed mail information is automatically deleted from the P service server upon transmitting a print end notification to the P service server.

A processing flow for executing the distribution service (reception of registered information) will be described with reference to Fig. 100A.

Fig. 100A is a flow chart showing a processing flow for executing the distribution service (reception of registered information) of this embodiment. Fig. 100B is a view showing the processing sequence in the service system for executing the distribution service of this embodiment.

In step S2701, (1) the user acquires a P-code by the portable terminal 400. (2) The user moves to the P service terminal 100 while keeping the P-code stored in the portable

terminal 400. (3) The P-code is input to the P service terminal 100 (Figs. 75 and 77 to 79). (4) The P service terminal 100 transmits the input P-code and the terminal properties (e.g., location and installation and printer
5 performance) of the P service terminal 100 itself to the P service server 200.

In step S2702, (5) when the P service server 200 recognizes that the received P-code is a P-code for the distribution service (reception of registered information),
10 (6) the P service terminal 100 requests the user to input the password (Fig. 77). In step S2703, the password is confirmed. The password to be confirmed herein is a password set for individual distribution information. If the password is not correct (NO in step S2703), the user
15 is requested to re-input the password. However, if an incorrect password is input a plurality of number of times, processing is ended. If the password is correct (YES in step S2703), the flow advances to step S2704.

In step S2704, (7) the P service server 200 acquires
20 information corresponding to the received P-code. In step S2705, the P service server 200 transmits contents of the acquired information, including property data (information provider and subject), to the P service terminal 100. (8) The P service terminal 100 displays the received contents
25 of information including the property data on the touch panel 104.

In step S2706, (9) it is determined whether printing of the displayed information is instructed. (10) If cancel of printing is instructed (NO in step S2706), the P service terminal 100 transmits a message representing that cancel is instructed to the P service server 200, and processing is ended. On the other hand, (10) when printing is instructed (YES in step S2706), the P service terminal 100 requests the P service server 200 to prepare print data of the information corresponding to the P-code, and the flow advances to step S2707.

In step S2707, it is determined whether the information to be printed is charged for. (11) If the information is free (NO in step S2707), the flow advances to the next processing. (12) If the information is charged for (YES in step S2707), the flow advances to step S2708 to receive the settlement method for settlement processing in printing from the user. (13) In accordance with the settlement method, the P service terminal 100 and P service server 200 exchange necessary data (Fig. 97). The P service terminal 100 receives the print data of the information to be printed from the P service server 200 and prints the data.

A processing flow for executing the personal information service will be described with reference to Fig. 101A.

Fig. 101A is a flow chart showing a processing flow

for executing the personal information service of this embodiment. Fig. 101B is a view showing the processing sequence in the service system for executing the personal information service of this embodiment.

5 In step S2801, (1) the user acquires a P-code by the portable terminal 400. (2) The user moves to the P service terminal 100 while keeping the P-code stored in the portable terminal 400. (3) The P-code is input to the P service terminal 100 (Figs. 75 and 77 to 79). (4) The P service
10 terminal 100 transmits the input P-code and the terminal properties (e.g., location of installation and printer performance) of the P service terminal 100 itself to the P service server 200.

 In step S2802, (5) when the P service server 200
15 recognizes that the received P-code is a P-code for the personal information service, (6) the P service terminal 100 requests the user to input the password (Fig. 77). In step S2803, the password is confirmed. If the password is not correct (NO in step S2803), the user is requested to
20 re-input the password. However, if an incorrect password is input a plurality of number of times, processing is ended. If the password is correct (YES in step S2803), the flow advances to step S2804.

 In step S2804, (7) the P service server 200 acquires
25 a frame corresponding to the received P-code. In step S2805, (8) the P service server 200 transmits contents of the

acquired frame, including property data (information provider and subject), to the P service terminal 100. (9) The P service terminal 100 displays the received contents of the frame including the property data on the touch panel 104 (Fig. 85). When registration of new information or a change in registered information is instructed, corresponding windows (Figs. 86 to 88) are appropriately displayed to receive inputs from the user.

In step S2806, (10) it is determined whether printing of the displayed frame is instructed. (11) If cancel of printing is (NO in step S2806), the P service terminal 100 transmits a message representing that cancel is instructed to the P service server 200, and processing is ended. On the other hand, (11) when printing is instructed (YES in step S2806), the P service terminal 100 requests the P service server 200 to prepare print data of the frame corresponding to the P-code, and the flow advances to step S2807. The print data of the frame is generated from the registered P-code list registered in the personal information service P-code table shown in Fig. 12. Each P-code registered in the registered P-code has been subjected to group setting in this embodiment. For each P-code subjected to group setting, P-code information having a maximum subcode of the attached section is acquired from the IP information table shown in Fig. 7. All the acquired P-code information have link information to another

P-code. Hence, information to be printed can be acquired by searching for the P-code set as link information again. If the date of registration of the acquired information to be printed is before the final date of printing set in the personal information service P-code table shown in Fig. 12, it is regarded that this information has been printed in the past, and therefore the information is not printed. If all dates of registration of individual information acquired from the P-code list registered in the personal information service P-code table are before the final date of printing, a message (not shown) representing that no information to be printed is present is displayed, and processing is ended.

In step S2807, it is determined whether the frame to be printed is charged for. (12) If the frame is free (NO in step S2807), the flow advances to the next processing. (13) If the frame is charged for (YES in step S2807), the flow advances to step S2808 to receive the settlement method for settlement processing in printing from the user. (14) In accordance with the settlement method, the P service terminal 100 and P service server 200 exchange necessary data (Fig. 97). The P service terminal 100 receives the print data of the frame to be printed from the P service server 200 and prints the data.

A processing flow for executing the distribution service (registration of information) will be described

next with reference to Fig. 102A.

Fig. 102A is a flow chart showing a processing flow for executing the distribution service (registration of information) of this embodiment. Fig. 102B is a view
5 showing the processing sequence in the service system for executing the distribution service (registration of information) of this embodiment.

In step S2901, (1) the user selects the distribution service (Fig. 75). (2) In accordance with the selection,
10 a window for requesting the user to input a P-code is displayed (Fig. 89). The P-code is input to the P service terminal 100. The P service terminal 100 transmits the input P-code and the terminal properties (e.g., location of installation and printer performance) of the P service
15 terminal 100 itself to the P service server 200.

In step S2902, (3) when the P service server 200 recognizes that the received P-code is a P-code for the distribution service (registration of information), the P service terminal 100 requests the user to input the password
20 (Fig. 90). If the input P-code is unregistered, password input is not requested. In step S2903, the password is confirmed. If the password is not correct (NO in step S2903), the user is requested to re-input the password. However, if an incorrect password is input a plurality of
25 number of times, processing is ended. If the password is correct (YES in step S2903), the flow advances to step

S2904.

In step S2904, (4) the user inputs information to be registered (Figs. 91 and 92). In step S2905, (5) the P service terminal 100 displays contents of the input
5 information on the touch panel 104 (Fig. 93).

In step S2906, it is determined whether the displayed contents are acknowledged. If the contents are not acknowledged (NO in step S2906), the flow returns to step S2904 to request the user to re-input the information. If
10 the contents are acknowledged (YES in step S2906), (7) the P service terminal 100 transmits the input information and the property data of the information, including the data type and the number of pages, to the P service server 200 and requests the P service server to issue a P-code. (8)
15 In accordance with this request, the P service server 200 starts making a P-code correspond to the received information and the property data of the information, including the data type and the number of pages. The user is requested to input a password to be set for the input
20 information (Fig. 94).

In step S2908, (9) it is determined whether the input password can be set. If the password cannot be set (NO in step S2908), the flow returns to step S2907 to request the user to re-input the password. If the password can be set
25 (YES in step S2908), the flow advances to step S2909 to input the valid dates of the input information (Fig. 95). In step

S2910, (10) the P service server registers the input information and the password and valid dates therefor and issues a P-code corresponding to the information. The P-code to be issued has a combination of a numerical value representing a "telephone number" and a numerical value representing an "attached number (subcode)" and also has a form of a number sequence, "telephone number-attached number", with a predetermined symbol ("- " in this case) inserted between the two numerical value sequences. The attached number is 1 when the number of distribution service information in the user information table shown in Fig. 9 is 0. When the number of distribution service information is not 0, pieces of registered distribution service information searched are searched from the P-code list, and the minimum attached number of a P-code that has expired is used as an attached number. If a registered distribution service information that has expired is not present, "the number of distribution service information + 1" is used as an attached number. In step S2911, (11) the P service terminal 100 displays the registered contents (P-code, password, data amount, and valid dates) of the registered information on the touch panel 104 (Fig. 96).

Details of processing in steps S2502 in Fig. 98A, step S2604 in Fig. 99A, step S2704 in Fig. 100A, and step S2804 in Fig. 101A will be described with reference to Figs. 103A and 103B.

<Procedure of Acquiring Information>

Figs. 103A and 103B are flow charts for explaining the procedure of acquiring IP information, mail data, and distribution data in the P service server 200 of this embodiment. First in step S3201, it is determined that the P-code input in the P service terminal 100 is an IP P-code. This can be determined on the basis of the state of the first bit of the P-code, as described above with reference to Figs. 17 and 18. When the P-code is an IP P-code, the flow advances to step S3202 to determine whether contents corresponding to the P-code are present in the P service server 200. This determination can be done by checking the state of the 17th bit, as shown in Fig. 18.

When the P service server 200 has the contents of the IP information represented by the P-code, the flow advances from step S3202 to step S3203 to acquire the IP information and its properties in accordance with entity file information registered in the IP information registration table shown in Fig. 7.

If it is determined in step S3202 that the contents of the IP information are not present in the P service server 200 (i.e., the IP information has its contents on the IP server side), the flow advances to step S3204. In step S3204, the class category value and external code are extracted from the input P-code. In this processing, the values of the 18th to 20th bits are extracted to obtain a

class category value, and the external code section is extracted on the basis of the class category value. For example, when the class category value is 3 (medium scale), the values of the 21st to 36th bits correspond to the external code, as shown in Fig. 18.

When the class category and external code are obtained in the above manner, a corresponding URL is acquired by looking up the P-code use table (to be described later) shown in Fig. 72 in step S3205. The URL acquired at this time is the address of the IP server having the contents of the P-code. Hence, in step S3206, the IP server is accessed according to the URL obtained in step S3205 to transmit the P-code. The IP server obtains contents and properties corresponding to the transmitted P-code by looking up the P-code registration table and transmits them to the P service server 200.

In step S3207, the contents and properties transmitted from the IP server in the above-described way are received, so the IP information is acquired.

When the input P-code is a personal P-code, the flow advances from step S3201 to step S3220. In step S3220, contents specified by the P-code are acquired by looking up the P-code table shown in Figs. 10 to 12. If the attached section is "#Subcode", the flow advances from step S3221 to step S3224 to obtain corresponding mail data and its properties.

When the data attached section is "-Subcode", the flow advances from step S3222 to step S3225 to acquire distribution data upon authentication by a password.

When the attached section is "##Subcode", the flow
5 advances from step S3223 to step S3226 to obtain a P-code list (frame) in the personal information service. In step S3227, acquisition of IP information (the above-described processing in steps S3202 to S3207) is executed using the P-code registered in the P-code list.

10 <Advertisement Search Processing>

In the P service system, when a user obtains a print output from the P service terminal 100, predetermined advertisement information is automatically attached to the print unless the user or information provider rejects it.
15 Processing of searching for advertisement information to be attached will be described below.

Fig. 104 is a flow chart of advertisement search processing.

In step S3001, a keyword list of information of the
20 information service or personal information service, mail of the mail service, or information of the distribution service is prepared for printing. This keyword list is prepared in the following way in accordance with the contents of each service.

25 For the information service or personal information service, keywords are extracted by looking up the

properties of IP information, properties of user registration of the user, and properties of the P service terminal 100 for printing.

For the mail service, keywords are extracted by
5 looking up the properties of user registration of the user and properties of the P service terminal 100 for printing.

For the distribution service, keywords are extracted by looking up the properties of the P service terminal 100 for printing, and also the properties of user registration
10 of the user when the user has done user registration.

In any service, the keyword list can be prepared in units of information. For example, for the information service, the keyword list of the properties of IP information, the keyword list of the properties of user
15 registration, and the keyword list of the properties of the P service terminal 100 can be individually prepared. This will be described below in more detail by exemplifying the information service.

Figs. 105A to 105E are views showing examples of
20 keyword lists for IP information.

For example, Fig. 105A shows a keyword list of IP information requested by the user in the information service. As a keyword, "marriage" is extracted. In Fig. 105B, keywords are extracted from the registered
25 matters of user registration. In Fig. 105C, a keyword is extracted from the properties (e.g., location of

installation) of the P service terminal.

Each keyword has a numerical value of "weight". This numerical value is given to each keyword in consideration of universally accepted idea on the basis of the contents and used to define priority of advertisement information in advertisement search processing. A numerical value with "+" means that IP information or the like including the keyword has positive contents when viewed from the universally accepted idea. A numerical value with "-" means that the information has negative contents. The magnitude of the numerical value can be proportional to the degree of importance.

In the P service system, in addition to these keyword lists, a highest priority keyword list and lowest priority keyword list set on the system side can be prepared.

The highest priority keyword list is a list of keywords corresponding to an advertisement that informs, e.g., a special campaign held on the P service system. An example of this keyword list is shown in Fig. 105D.

The lowest priority keyword list is a list of keywords with which at least one advertisement information can be searched for and is prepared to prevent advertisement search processing from searching no advertisement information. Hence, as a lowest priority keyword, a keyword having wide meaning is used.

In step S3002, using each keyword as a search key on

the basis of the keyword lists prepared in step S3001, advertisement information having a keyword matching the search keyword is searched for. In step S3003, the search result list is prepared.

5 Figs. 106A to 106E are examples of search result lists.

The search result lists are prepared in units of the above-described five keyword lists.

Fig. 106A shows a search result list corresponding
10 to the keyword list of IP information (Fig. 105A), in which five pieces of advertisement information are searched for by the keyword "marriage". In this list, "weight" is a numerical value given to the keyword in each advertisement information and has the same meaning as the above-described
15 "weight". The "degree of matching" is a numeral value obtained by multiplying the numerical value of "weight" of one keyword by that of the other keyword. More specifically, in the keyword list of IP information, since the weight of "marriage" is "+10", the columns of "degree of matching"
20 in Fig. 106A are filled with results obtained by multiplying "+10" by each of weights "+10", "-5", "+3", "-4", and "+7" of the keywords of advertisement information.

In this advertisement search processing, an advertisement having a larger value of "degree of matching"
25 has a higher priority of insertion. As the value becomes small, the priority becomes low.

As shown in Figs. 106A and 106B, a single keyword has many weights. This is because advertisement information including the keyword "marriage" may be an advertisement of a wedding ceremony hall or an advertisement of divorce consultation. If they are regarded to be equivalent, inappropriate advertisement information may be inserted into contents of information to be printed.

In processing of this embodiment, if negative advertisement information is searched for in correspondence with positive IP information, values with signs "+" and "-" are multiplied. The degree of matching has a negative value, and the priority can be made low. If negative advertisement information is searched for in correspondence with negative IP information (e.g., an advertisement of funeral and an advertisement of a hospital), values with signs "-" and "-" are multiplied. The degree of matching has a positive value, and the priority becomes high.

In step S3004, the pieces of advertisement information in the search result list are rearranged by looking up the properties of advertisement information.

In rearranging the pieces of information, on the basis of the properties of each advertisement information, a value is added to or subtracted from the degree of matching calculated in advance. For example, an advertisement whose term of insertion has expired or charge exceeds the

maximum charge must not be inserted, and a predetermined numerical value can be subtracted from the calculated degree of matching. On the other hand, for an advertisement whose limitations on printing (designated in the dialog box shown in Fig. 65 or 66) are lenient, a predetermined numerical value can be added to the calculated degree of matching for evaluation. This is because such advertisement information can cope with an arbitrary layout and has a higher degree of freedom for printing.

10 To evenly give opportunities for insertion while giving priority to an advertisement with low insertion frequency, a numerical value corresponding to the insertion frequency may be added to the degree of matching.

15 In addition, a predetermined numerical value may be added to the degree of matching with priority given to an advertisement for which a large charge is paid from the advertisement provider to the operator of the P service. An advertisement provider who pays a large charge should be treated favorably. This also easily excuses the user compensation for the received service.

20 With priority given to an advertisement directly associated with information desired by the user, a predetermined numerical value may be added to the degree of matching for the purpose of increasing the business chance of the advertisement provider.

 In this way, values are added to or subtracted from

the degrees of matching to calculate final numerical values. Figs. 107A to 107E show lists of advertisement information rearranged in descending order of the magnitudes of values. As is apparent from Figs. 107A to 107E, the degree of
5 matching is not always proportional to the numerical value of "weight".

In step S3005, a layout example of advertisement information is prepared. A plurality of layout examples are prepared by picking up pieces of advertisement
10 information from the search result lists shown in Figs. 107A to 107E in descending order of priority.

Priorities may be defined in units of search result lists shown in Figs. 107A to 107E. For example, first advertisement information may be picked up from the search
15 result list of the highest priority list (Fig. 107D), and then pieces of advertisement information may be sequentially picked up from the search result list of IP information (Fig. 107A), the search result list of user registration (Fig. 107B), the search result list of the P
20 service terminal (Fig. 107C), and the search result list of the lowest priority list (Fig. 107E).

In step S3006, one layout example that is supposed to be most appropriate is selected from the layout examples of advertisement information in consideration of the user's
25 desire, print size, and total charge. The P-code and layout conditions of the advertisement information are specified

and temporarily stored, and advertisement search processing is ended.

<Operation of Portable Terminal>

The P-code extraction function and P-code
5 transmission function of the portable terminal 400 according to this embodiment will be described next.

Fig. 108 is a flow chart for explaining P-code extraction processing of the portable terminal of this embodiment. This processing is executed when the contents
10 of mail received are being displayed on the portable terminal 400.

In steps S3101 to S3103, it is determined whether the cursor keys 401 and 402 of the portable terminal 400 are operated, the block designation key 404 is operated, and
15 the P-code key 403 is operated.

When the cursor key is operated in the mail displayed state, the flow advances from step S3101 to step S3105 to determine whether block designation is progressing. The block designation mode is set in step S3109 (to be described
20 later) by operating the block designation key. If the block designation mode is not set, the flow advances to step S3106 to move the cursor in units of characters in the display of mail contents. If the block designation mode is set, a region where the cursor has moved is set as a selected
25 region, and display of that portion is inverted. The flow advances to step S3104. If mail display continues, the flow

returns to step S3101. If mail display is ended, this processing is ended.

When the block designation key 404 is operated, the flow advances from step S3102 to step S3108 to determine
5 whether the block designation mode has already been set. If NO in step S3108, the flow advances to step S3109 to switch the operation mode to the block designation mode. If YES in step S3108, the flow advances to step S3110 to cancel the block designation mode. That is, the block designation
10 key functions as an ON/OFF switch for the block designation mode. After that, the flow advances to step S3104. If mail display continues, the flow returns to step S3101. If mail display is ended, this processing is ended.

When the P-code key 403 is operated, the flow advances
15 from step S3101 to step S3111 to determine whether a selected region in inverted display is present in the currently displayed character string. If YES in step S3111, the flow advances to step S3112 to store the selected region in the P-code storage area 422c. If NO in step S3111, the
20 flow advances to step S3113 to automatically select a P-code. After that, the flow advances to step S3104. If mail display continues, the flow returns to step S3101. If mail display is ended, this processing is ended.

Automatic P-code extraction in step S3113 will be
25 described. Fig. 109 is a flow chart for explaining automatic P-code extraction processing in step S3113.

In step S3120, a character string enclosed by two tags
<Pcode> and </Pcode> is searched for. When a character
string enclosed by the two tags <Pcode> and </Pcode> is
searched for, the flow advances from step S3121 to step
5 S3122 to store the detected character string in the P-code
storage area 422c. This processing is executed for the
entire mail that is being displayed currently (step S3123).

An operation mode for executing the above processing
for all mail data held in the memory of the portable terminal
10 400 at once may be provided.

In the above way, the portable terminal 400 of this
embodiment can store a P-code sent as mail in the P-code
storage area 422c. Even when the user is notified of a
P-code not by electronic data such as mail but by a magazine
15 or newspaper, the P-code may be input using the P-code key
and dial keys and held in the P-code storage area 422c.
According to the portable terminal 400 of this embodiment,
the P-code stored in the P-code storage area 422c can be
input to the P service terminal 100 by communication with
20 the P service terminal 100.

Fig. 110 is a flow chart for explaining P-code
transmission processing by the portable terminal of this
embodiment. This processing is executed when the
displayed contents of the portable terminal 400 are in the
25 initial state.

In step S3141, when operation of the P-code key 403

is detected, the flow advances to step S3142 to determine whether a P-code is stored in the P-code storage area 422c. If no P-code is stored in the P-code storage area 422c, the flow advances to step S3143 to display a message

5 representing that no P-code is present on the display 410, and this processing is ended.

 If YES in step S3142, the flow advances to step S3144 to start communication processing with the P service terminal 100 using the infrared communication section 405.

10 It is determined in step S3145 whether the P service terminal 100 is ready, and processing waits until the P service terminal 100 is ready. If the wait time exceeds a predetermined time, it is determined that time is out. The flow advances from step S3146 to step S3147 to display
15 a message representing a communication error on the display 410, and processing is ended.

 When it is confirmed that the P service terminal 100 is ready, the P-code stored in the P-code storage area 422c is transmitted to the P service terminal 100 in step S3148.

20 When transmission is ended, it is inquired on the display 410 whether the P-code currently stored in the P-code storage area 422c is to be erased. If the user instructs to erase the P-code, the P-code is erased in step S3151.

25 The above processing can also be applied to a case wherein the portable terminal 400 is connected to the

portable terminal connector 106 of the P service terminal 100.

In the above processing, transmission is started by the key operation of the portable terminal 400. Instead, a P-code may be automatically input to the P service terminal 100 under the control of the P service terminal 100 without operating any keys on the portable terminal side. Fig. 111 is a flow chart for explaining another form of P-code transmission processing by the portable terminal of this embodiment.

In step S3161, when it is detected that the portable terminal is connected to the portable terminal connector 106 (or when a predetermined signal is sent to the P service terminal through the infrared communication section by operating the P-code key), communication between the P service terminal and the portable terminal starts in step S3162.

When a P-code request is input from the P service terminal 100 by communication, the flow advances from step S3163 to step S3165 to determine whether a P-code is stored in the P-code storage area 422c. If no P-code is stored, the flow advances to step S3167 to notify the P service terminal 10 that no P-code is present. If a P-code is present in the P-code storage area 422c, the flow advances to step S3166 to transmit the stored P-code to the P service terminal 100.

The subsequent processing in steps S3168 to S3170 is the same as the above-described processing in steps S3149 to S3151.

As described above, according to the portable terminal of this embodiment, a P-code can be extracted from mail, held in the memory, and transmitted to the P service terminal. Hence, any input error in operation of the P service terminal 100 can be prevented, and the operability is largely improved.

10 <Other Embodiment>

The present invention may be applied to a system constituted by a plurality of devices (e.g., a host computer, an interface device, a reader, a printer, and the like) or an apparatus comprising a single device (e.g., a copying machine, a facsimile apparatus, or the like).

The object of the present invention is realized even by supplying a storage medium storing software program codes for realizing the functions of the above-described embodiment to a system or apparatus, and causing the computer (or a CPU or an MPU) of the system or apparatus to read out and execute the program codes stored in the storage medium.

In this case, the program codes read out from the storage medium realize the functions of the above-described embodiment by themselves, and the storage medium storing the program codes constitutes the present invention.

As a storage medium for supplying the program codes,

a floppy disk, a hard disk, an optical disk, a magnetooptical disk, a CD-ROM, a CD-R, a magnetic tape, a nonvolatile memory card, a ROM, or the like can be used.

5 The functions of the above-described embodiment are realized not only when the readout program codes are executed by the computer but also when the OS (Operating System) running on the computer performs part or all of actual processing on the basis of the instructions of the program codes.

10 The functions of the above-described embodiment are also realized when the program codes read out from the storage medium are written in the memory of a function expansion board inserted into the computer or a function expansion unit connected to the computer, and the CPU of the function
15 expansion board or function expansion unit performs part or all of actual processing on the basis of the instructions of the program codes.

As many apparently widely different embodiments of the present invention can be made without departing from the
20 spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. An information providing method of providing information to a user, characterized by comprising:
 - the input step of inputting a code;
 - 5 the extraction step of searching a first database for first information corresponding to the input code and extracting the first information;
 - the attachment step of, when a predetermined condition is satisfied, searching a second database for
 - 10 second information, extracting the second information, and attaching the extracted second information to the first information; and
 - the step of outputting the first information or the first information having the second information.
- 15 2. The method according to claim 1, characterized in that the input step comprises inputting the code through a terminal apparatus connected to a network.
3. The method according to claim 1, characterized by further comprising the printing step of printing the output
- 20 information.
4. The method according to claim 1, characterized in that the first information contains information with which the user himself/herself can expect contents or type of the first information.
- 25 5. The method according to claim 1, characterized in that the second information contains arbitrary

advertisement information.

6. The method according to claim 1, characterized in that the predetermined condition is a condition that attachment of the second information is permitted in
5 addition to the first information corresponding to the input code.

7. The method according to claim 1, characterized in that the predetermined condition is a condition that there is a margin for printing the second information in addition
10 to the first information.

8. The method according to claim 1, characterized in that the predetermined condition is a condition that a type of information registered by the user in advance is detected in the attachment step as the second information.

9. The method according to claim 1, characterized in that the first database stores a plurality of information extractable as the first information each of which has a code, and the second database stores a plurality of
15 advertisement information extractable as the second
20 information each of which has a code.

10. The method according to claim 1, characterized in that a plurality of information provider servers each having the first database and the second database, and a management server for systematically controlling said
25 plurality of information provider servers are connected through a network.

information.

14. The method according to claim 10, characterized by further comprising the first registration step of registering the first information in the first database.

5 15. The method according to claim 14, characterized in that the first registration step comprises the storage step of storing the registered first information together with a code for identifying the registered first information.

10 16. The method according to claim 15, characterized in that a server identifier for discriminating one information provider server from the remaining information provider servers is assigned in advance to each of said plurality of information provider servers, and

the storage step comprises storing the registered
15 first information in said information provider server together with a code including the server identifier of said information provider server and an information identifier for discriminating the registered first information from the remaining information in said information provider
20 server.

17. The method according to claim 14, characterized in that the first registration step comprises

the image input step of inputting an original image,
the step of sending the input original image to the
25 first database, and
the step of giving a code to be attached to the

original image.

18. The method according to claim 14, characterized in that the first registration step comprises

the character information input step of inputting
5 character information,

the step of sending the input character information to the first database, and

the step of giving a code to be attached to the character information.

10 19. The method according to claim 14, characterized by further comprising the first change step of changing the first information registered in the first database.

20. The method according to claim 14, characterized by further comprising the deleting step of deleting the first
15 information registered in the first database.

21. The method according to claim 1, characterized by further comprising the second registration step of registering the second information in the second database.

22. The method according to claim 21, characterized in
20 that the second registration step comprises the storage step of storing the registered second information together with a code for identifying the registered second information.

23. The method according to claim 2, characterized in
25 that said terminal apparatus stores terminal specification information associated with specifications of said

terminal apparatus in advance,

the input step comprises inputting the terminal specification information together with the code, and

the attachment step comprises determining using the
5 terminal specification information whether the predetermined condition is satisfied.

24. The method according to claim 1, characterized by further comprising the third registration step of registering in advance, in units of users, user profile
10 information used to determine whether the predetermined condition is satisfied.

25. The method according to claim 24, characterized in that the input step comprises inserting an identifier for identifying the user into the code and inputting the code
15 containing the user identifier for identifying the user, and

the attachment step comprises specifying a corresponding user profile on the basis of the received user identifier, searching for the second information
20 corresponding to the user profile, extracting the second information, and attaching the extracted second information to the first information.

26. A mail extraction method of extracting mail addressed to a user from a mail server, characterized by comprising:
25 the step of sending an input user identifier to said mail server;

the extraction step of extracting mail selected by
the user from said mail server;

the determination step of determining whether
another information corresponding to the user is to be
5 searched for and extracted;

the attachment step of, upon determining that the
another information corresponding to the user is to be
extracted, extracting the another information and
attaching the information to the mail;

10 the step of outputting the mail having the another
information; and

the printing step of printing the output mail.

27. The method according to claim 26, characterized by
further comprising the deleting step of, when printing is
15 ended in the printing step, deleting the printed mail from
said mail server.

28. The method according to claim 26, characterized by
further comprising the input step of inputting the user
identifier.

20 29. An information providing system for providing
information to a user, characterized by comprising:

input means for inputting a code;

extraction means for searching a first database for
first information corresponding to the input code and
25 extracting the first information;

attachment means for, when a predetermined condition

is satisfied, searching a second database for second information, extracting the second information, and attaching the extracted second information to the first information; and

5 output means for outputting the first information or the first information having the second information.

30. The system according to claim 29, characterized in that said system has a terminal apparatus connected to a network, and said input means inputs the code from said
10 terminal apparatus through a network.

31. The system according to claim 29, characterized in that said system has a terminal apparatus connected to a network, and said terminal apparatus comprises printing means for printing the output information.

15 32. The system according to claim 29, characterized in that the first information contains information with which the user himself/herself can expect contents or type of the first information.

33. The system according to claim 29, characterized in
20 that the second information contains arbitrary advertisement information.

34. The system according to claim 29, characterized in that the predetermined condition is a condition that attachment of the second information is permitted in
25 addition to the first information corresponding to the input code.

35. The system according to claim 27, characterized in that the predetermined condition is a condition that there is a margin for printing the second information in addition to the first information.

5 36. The system according to claim 29, characterized in that the predetermined condition is a condition that a type of information registered by the user in advance is detected by said attachment means as the second information.

37. The system according to claim 29, characterized in
10 that the first database stores a plurality of information extractable as the first information each of which has a code, and the second database stores a plurality of advertisement information extractable as the second information each of which has a code.

15 38. The system according to claim 29, characterized in that a plurality of information provider servers each having the first database and the second database, and a management server for systematically controlling said plurality of information provider servers are connected
20 through a network.

39. The system according to claim 38, characterized in that said information provider server is included in said management server.

40. The system according to claim 38, characterized in
25 that said management server has a first table which stores a relationship between a code of each first information and

said information provider server storing the first information, and

said extraction means specifies said information provider server storing the first information by looking
5 up the first table, searches the first database of said information provider server for the first information corresponding to the input code, and extracts the first information.

41. The system according to claim 38, characterized in
10 that said management server has a second table which stores a relationship between a code of each second information and said information provider server storing the second information, and

said attachment means specifies, when the
15 predetermined condition is satisfied, said information provider server storing the second information by looking up the second table, searches the second database of said information provider server for the second information, extracts the second information, and attaches the extracted
20 second information to the first information.

42. The system according to claim 38, characterized by further comprising first registration means for registering the first information in the first database.

43. The system according to claim 42, characterized in
25 that said first registration means comprises storage means for storing the registered first information together with

a code for identifying the registered first information.

44. The system according to claim 43, characterized in that a server identifier for discriminating one information provider server from the remaining information provider servers is assigned in advance to each of said plurality of information provider servers, and

said storage means stores the registered first information in said information provider server together with a code including the server identifier of said information provider server and an information identifier for discriminating the registered first information from the remaining information in said information provider server.

45. The system according to claim 42, characterized in that said first registration means comprises

image input means for inputting an original image, means for sending the input original image to the first database, and

code giving means for giving a code to be attached to the original image.

46. The system according to claim 45, characterized in that said system comprises a terminal apparatus having a scanner, and said information provider server having the first database, which are connected through a network,

said image input means comprises said scanner, and said information provider server has said code giving

means.

47. The system according to claim 42, characterized in that said first registration means comprises

character information input means for inputting
5 character information,

means for sending the input character information to the first database, and

code giving means for giving a code to be attached to the character information.

10 48. The system according to claim 47, characterized in that said system comprises a terminal apparatus having external storage means, and said information provider server having the first database, which are connected through a network,

15 said character information input means inputs the character information from a storage medium supplied to said external storage means, and

said information provider server has said code giving means.

20 49. The system according to claim 42, characterized by further comprising first change means for changing the first information registered in the first database.

50. The system according to claim 42, characterized by further comprising deleting means for deleting the first
25 information registered in the first database.

51. The system according to claim 29, characterized by

further comprising second registration means for
registering the second information in the second database.

52. The system according to claim 51, characterized in
that said second registration means comprises storage means
5 for storing the registered second information together with
a code for identifying the registered second information.

53. The system according to claim 30, characterized in
that said terminal apparatus stores terminal specification
information associated with specifications of said
10 terminal apparatus in advance,

said input means inputs the terminal specification
information together with the code, and

said attachment means determines using the terminal
specification information whether the predetermined
15 condition is satisfied.

54. The system according to claim 29, characterized by
further comprising third registration means for
registering in advance, in units of users, user profile
information used to determine whether the predetermined
20 condition is satisfied.

55. The system according to claim 54, characterized in
that said input means inserts an identifier for identifying
the user into the code and inputs the code containing the
user identifier for identifying the user, and

25 said attachment means specifies a corresponding user
profile on the basis of the received user identifier,

searches for the second information corresponding to the user profile, extracts the second information, and attaches the extracted second information to the first information.

56. A mail extraction system for extracting mail
5 addressed to a user from a mail server, characterized by comprising:

means for sending an input user identifier to said mail server;

means for extracting mail selected by the user from
10 said mail server;

determination means for determining whether another information corresponding to the user is to be searched for and extracted;

attachment means for, upon determining that the
15 another information corresponding to the user is to be extracted, extracting the another information and attaching the information to the mail;

output means for outputting the mail having the another information; and

20 printing means for printing the output mail.

57. The system according to claim 56, characterized by further comprising deleting means for, when printing is ended by said printing means, deleting the printed mail from said mail server.

25 58. The system according to claim 57, characterized by further comprising input means for inputting the user

identifier.

✓ 59. A terminal apparatus comprising said scanner of claim 46, said input means of claim 30, and said printing means of claim 31.

5 60. A computer-readable storage medium which stores an information providing program for providing information to a user, characterized by comprising:

the input step of inputting a code;

the extraction step of searching a first database for
10 first information corresponding to the input code and extracting the first information;

the attachment step of, when a predetermined condition is satisfied, searching a second database for second information, extracting the second information, and
15 attaching the extracted second information to the first information; and

the step of outputting the first information or the first information having the second information.

61. The medium according to claim 60, characterized in
20 that the input step comprises inputting the code through a terminal apparatus connected to a network.

62. The medium according to claim 60, characterized by further comprising the printing step of printing the output information.

25 63. The medium according to claim 60, characterized in that the first information contains information with which

the user himself/herself can expect contents or type of the first information.

64. The medium according to claim 60, characterized in that the second information contains arbitrary
5 advertisement information.

65. The medium according to claim 60, characterized in that the predetermined condition is a condition that attachment of the second information is permitted in addition to the first information corresponding to the
10 input code.

66. The medium according to claim 62, characterized in that the predetermined condition is a condition that there is a margin for printing the second information in addition to the first information.

67. The medium according to claim 60, characterized in that the predetermined condition is a condition that a type information registered by the user in advance is detected in the attachment step as the second information.
15

68. The medium according to claim 60, characterized in that the first database is caused to store a plurality of information extractable as the first information each of which has a code, and the second database is caused to store a plurality of advertisement information extractable as the second information each of which has a code.
20

69. The medium according to claim 60, characterized in that said program is applied in a plurality of information
25

provider servers each having the first database and the second database, and a management server for systematically controlling said plurality of information provider servers, which are connected through a network.

5 70. The medium according to claim 69, characterized in that said information provider server is included in said management server.

71. The medium according to claim 69, characterized in that said management server has a first table which stores
10 a relationship between a code of each first information and said information provider server storing the first information, and

the extraction step comprises specifying said information provider server storing the first information
15 by looking up the first table, searching the first database of said information provider server for the first information corresponding to the input code, and extracting the first information.

72. The medium according to claim 69, characterized in
20 that said management server has a second table which stores a relationship between a code of each second information and said information provider server storing the second information, and

the attachment step comprises, when the
25 predetermined condition is satisfied, specifying said information provider server storing the second information

by looking up the second table, searching the second database of said information provider server for the second information, extracting the second information, and attaching the extracted second information to the first
5 information.

73. The medium according to claim 69, characterized by further comprising the first registration step of registering the first information in the first database.

74. The medium according to claim 73, characterized in
10 that the first registration step comprises the storage step of storing the registered first information together with a code for identifying the registered first information.

75. The medium according to claim 74, characterized in
15 that a server identifier for discriminating one information provider server from the remaining information provider servers is assigned in advance to each of said plurality of information provider servers, and

the storage step comprises storing the registered first information in said information provider server
20 together with a code including the server identifier of said information provider server and an information identifier for discriminating the registered first information from the remaining information in said information provider server.

25 76. The medium according to claim 73, characterized in that the first registration step comprises

the image input step of inputting an original image,
the step of sending the input original image to the
first database, and

the step of giving a code to be attached to the
5 original image.

77. The medium according to claim 73, characterized in
that the first registration step comprises

the character information input step of inputting
character information,

10 the step of sending the input character information
to the first database, and

the step of giving a code to be attached to the
character information.

78. The medium according to claim 73, characterized by
15 further comprising the first change step of changing the
first information registered in the first database.

79. The medium according to claim 73, characterized by
further comprising the deleting step of deleting the first
information registered in the first database.

20 80. The medium according to claim 60, characterized by
further comprising the second registration step of
registering the second information in the second database.

81. The medium according to claim 80, characterized in
that the second registration step comprises the storage
25 step of storing the registered second information together
with a code for identifying the registered second

information.

82. The medium according to claim 61, characterized in that said terminal apparatus stores terminal specification information associated with specifications of said
5 terminal apparatus in advance,

the input step comprises inputting the terminal specification information together with the code, and

the attachment step comprises determining using the terminal specification information whether the
10 predetermined condition is satisfied.

83. The medium according to claim 60, characterized by further comprising the third registration step of registering in advance, in units of users, user profile information used to determine whether the predetermined
15 condition is satisfied.

84. The medium according to claim 83, characterized in that the input step comprises inserting an identifier for identifying the user into the code and inputting the code containing the user identifier for identifying the user,
20 and

the attachment step comprises specifying a corresponding user profile on the basis of the received user identifier, searching for the second information corresponding to the user profile, extracting the second
25 information, and attaching the extracted second information to the first information.

85. A computer-readable storage medium which stores a mail extraction program for extracting mail addressed to a user from a mail server, characterized by comprising:
 - the step of sending an input user identifier to said mail server;
 - the extraction step of extracting mail selected by the user from said mail server;
 - the determination step of determining whether another information corresponding to the user is to be searched for and extracted;
 - the attachment step of, upon determining that the another information corresponding to the user is to be extracted, extracting the another information and attaching the information to the mail;
 - the step of outputting the mail having the another information; and
 - the printing step of controlling to print the output mail.
86. The medium according to claim 85, characterized by further comprising the deleting step of, when printing is ended in the printing step, deleting the printed mail from said mail server.
87. The medium according to claim 85, characterized by further comprising the input step of inputting the user identifier.

ABSTRACT OF THE DISCLOSURE (Fig. 1)

An information providing method, information providing system, terminal apparatus, and storage medium storing an information providing program, which enable to
5 extract actually desired information and appropriately
extract information desired next, are provided. A
predetermined code is input from a P service terminal (100).
A P service server (200) searches the first database for
first information corresponding to the code and extracts
10 the information. When a predetermined condition is
satisfied, second information is searched for from the
second database and extracted. The extracted second
information is attached to the first information. The
first information or the first information having the
15 second information is returned to the P service terminal
(100).

Fig. 1

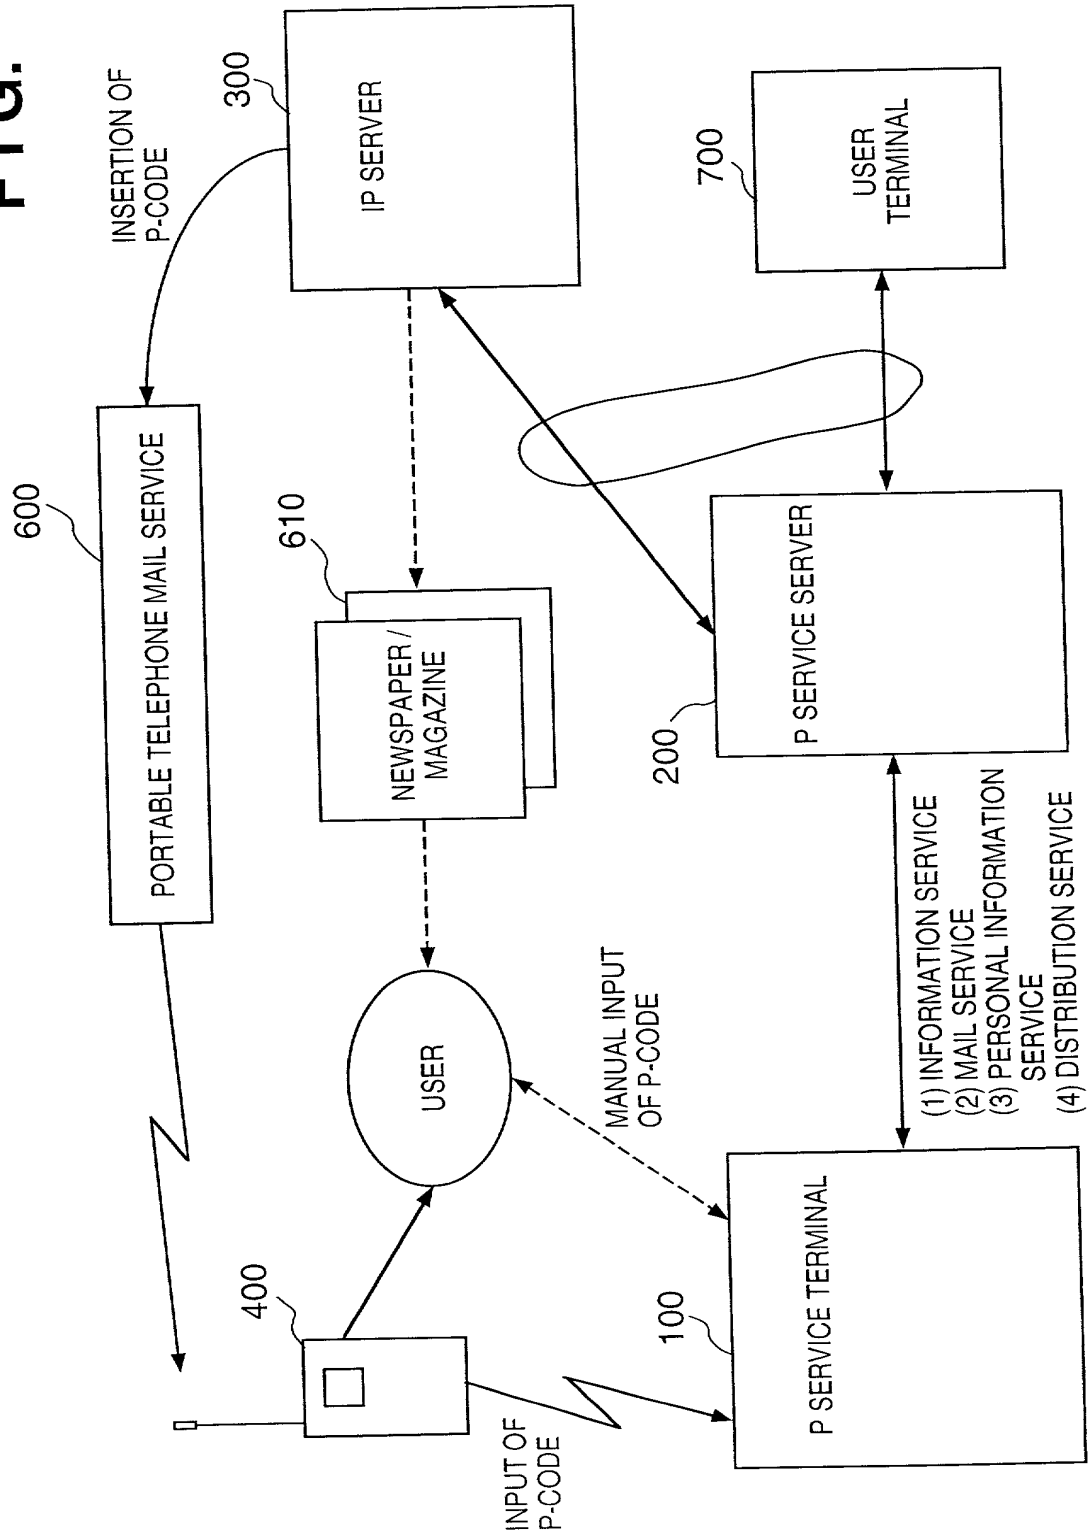


FIG. 2

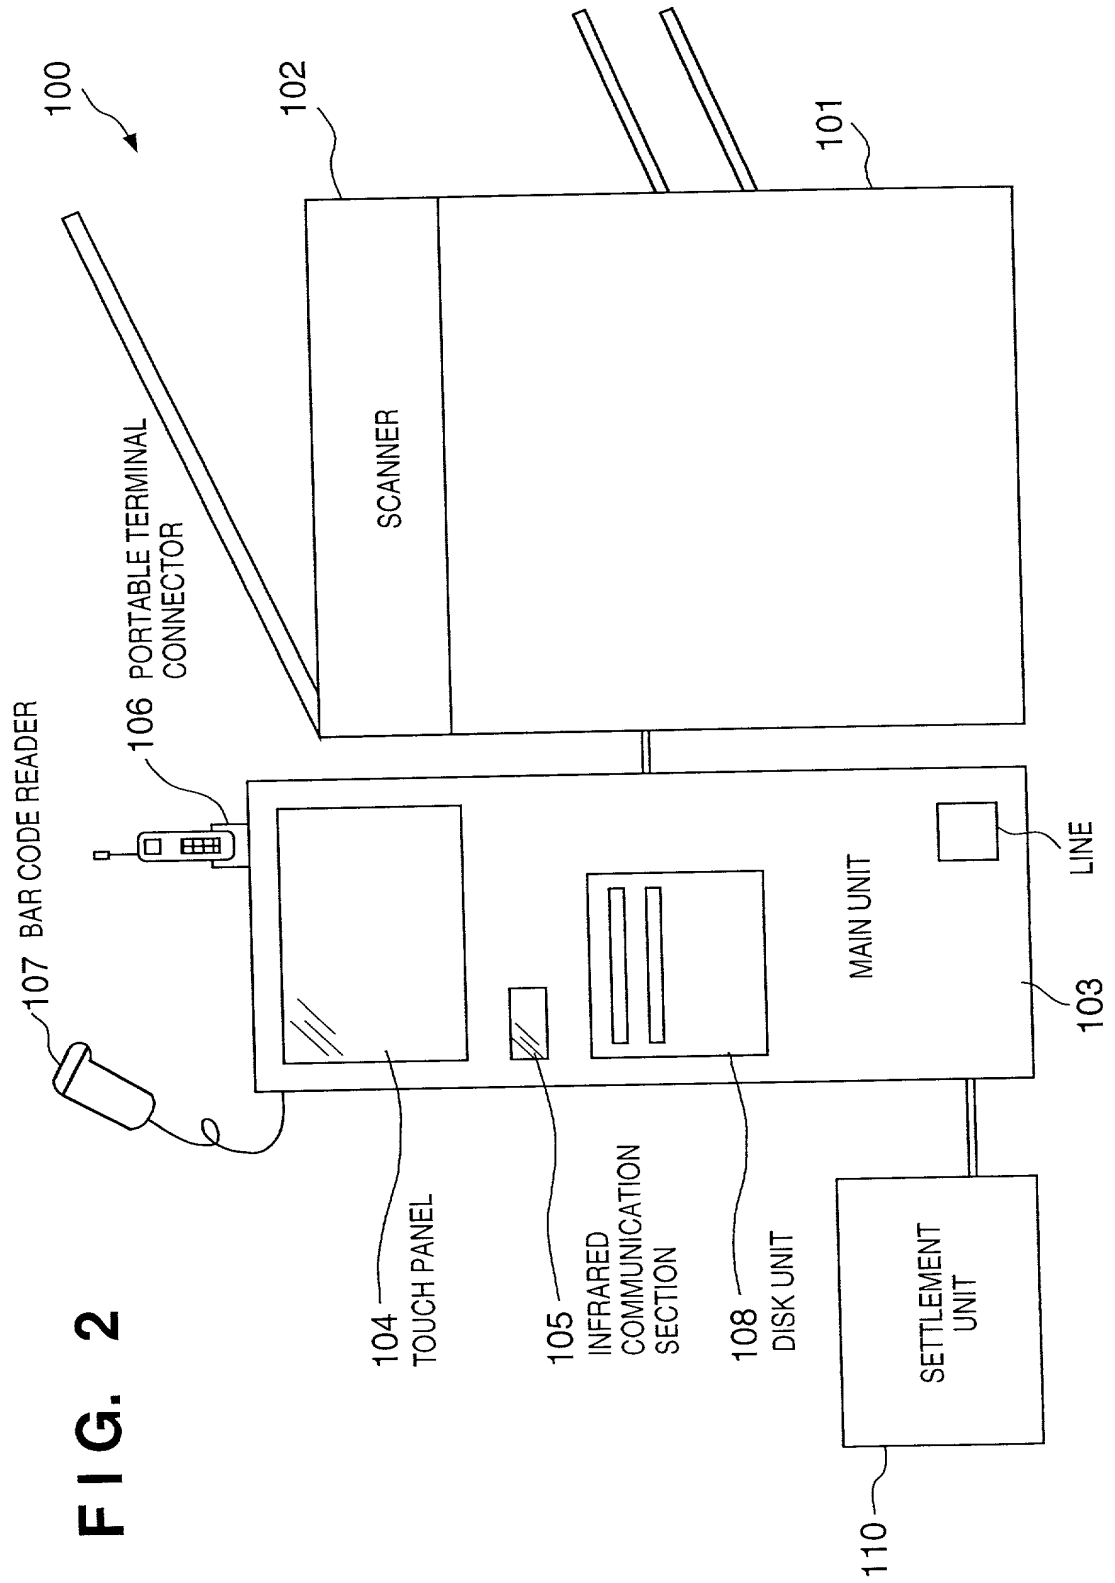


FIG. 3

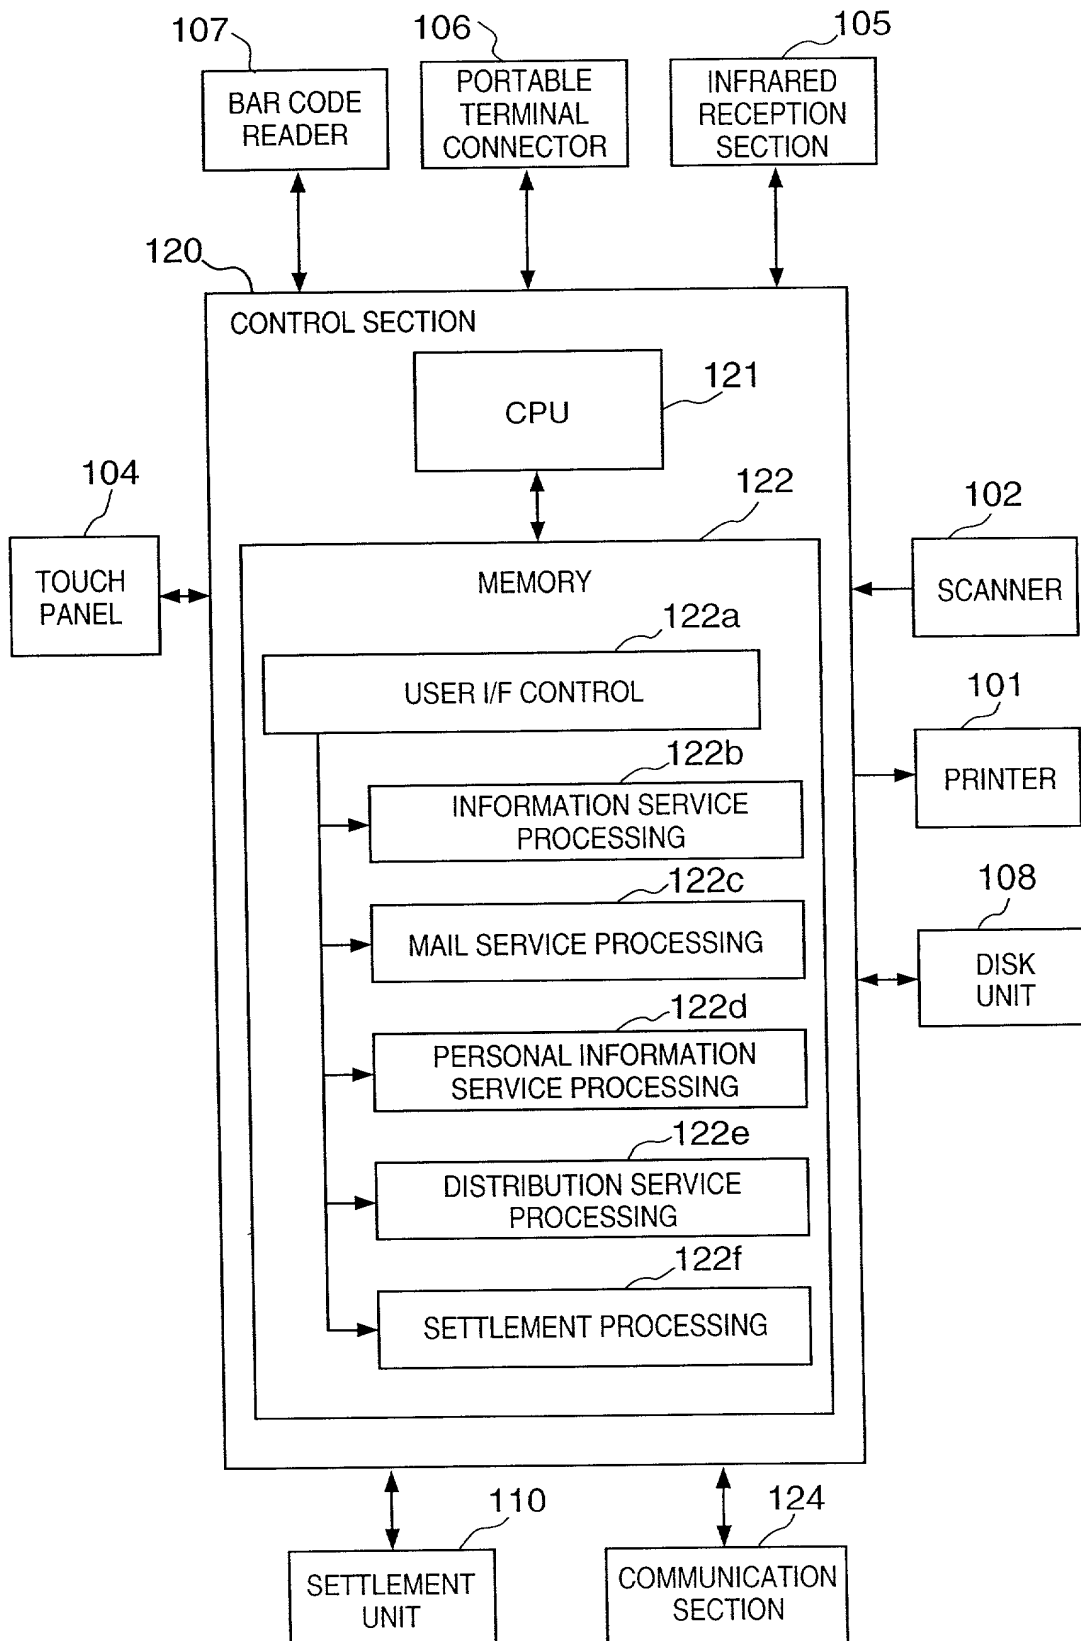


FIG. 4

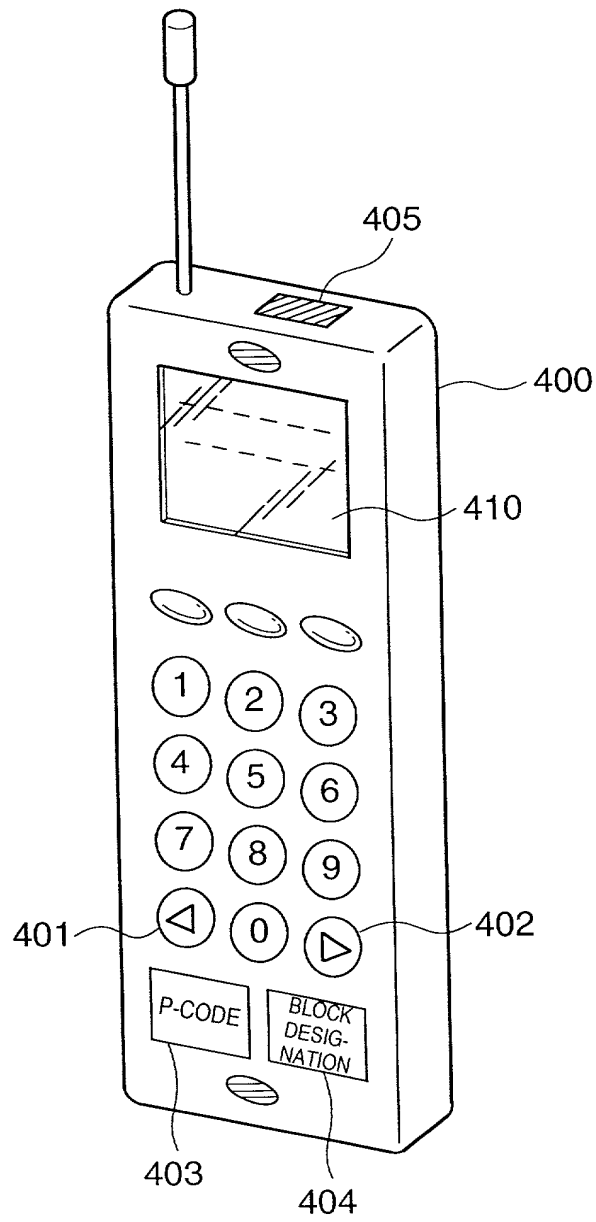


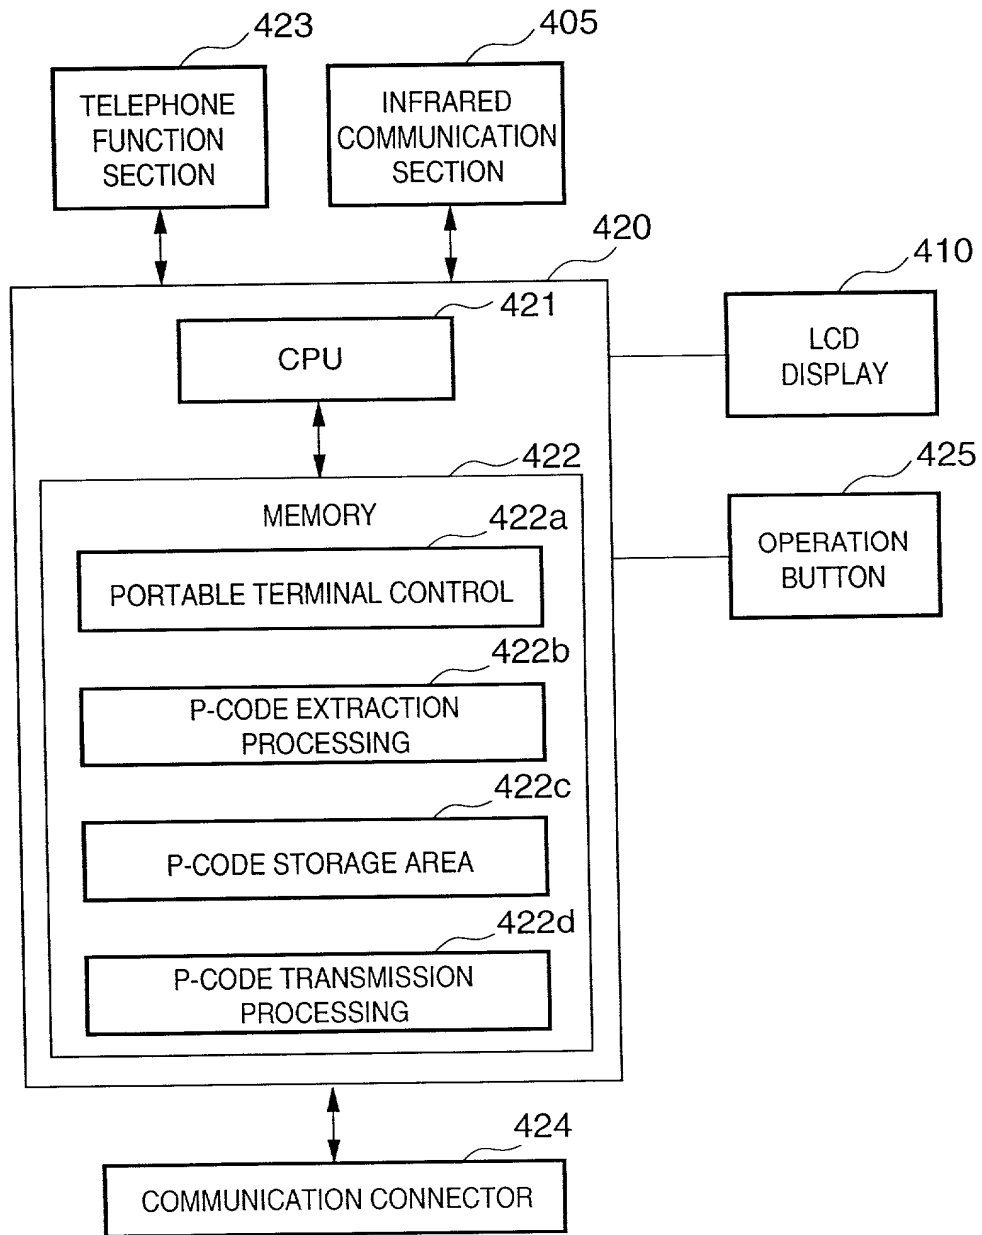
FIG. 5

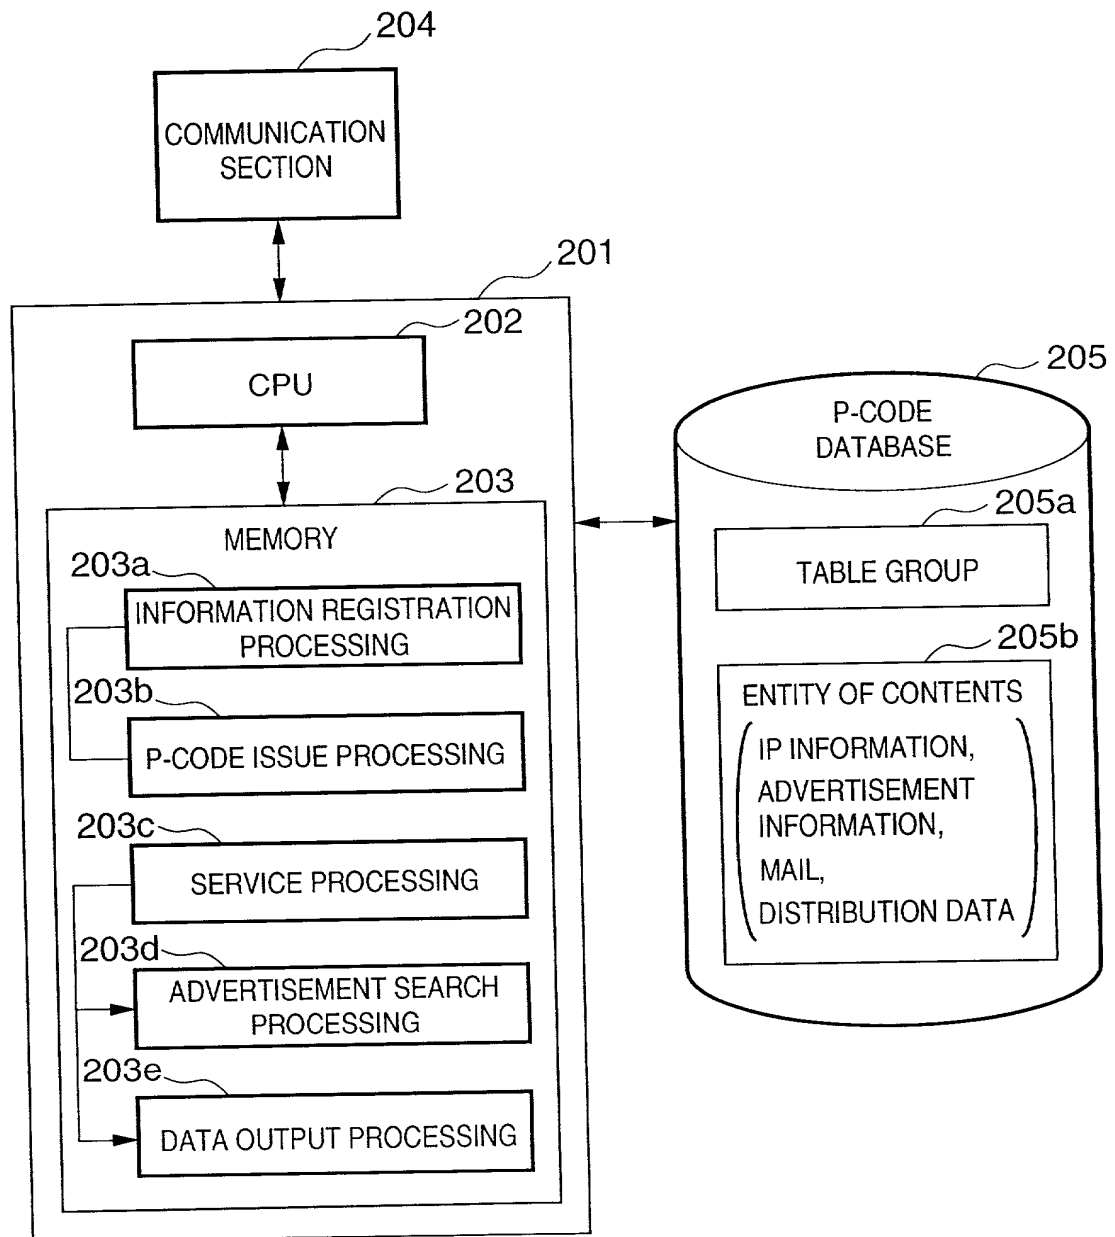
FIG. 6

FIG. 8

ADVERTISEMENT INFORMATION TABLE			
P-CODE	ADVERTISEMENT PROPERTIES	OWNER ID	TYPE OF LINK METHOD TARGET KEYWORD LIST TARGET KEYWORD WEIGHT LIST
		DATE OF START OF ADVERTISEMENT INSERTION	
		TERM OF ADVERTISEMENT	
		LINK INFORMATION TO IP INFORMATION	
		SIZE OF ADVERTISEMENT PORTRAIT / LANDSCAPE ADVERTISEMENT SIZE ADJUSTMENT METHOD SETTING OF ADVERTISEMENT INSERTION POSITION UPPER LIMIT OF AMOUNT ADVERTISEMENT PRICE INFORMATION (UNIT PRICE) UPPER LIMIT OF PRINTING COUNT CURRENT PRINTING COUNT	
	LINK	P-CODE	
	ENTITY FILE INFORMATION	NUMBER OF FILES FILE NAME (LIST CORRESPONDING TO NUMBER OF FILES)	

FIG. 9

USER INFORMATION TABLE		
P-CODE OF USER (TELEPHONE NUMBER)	USER PROFILE	POSTAL CODE ADDRESS TYPE OF SERVICE TO USE NAME OF COMPANY BUSINESS CATEGORY ID BUSINESS CATEGORY (OTHERS) NAME OF DEPARTMENT / SECTION POST JOB PRINTING PAPER INFORMATION
		BIRTHDAY / BLOOD TYPE / SEX FINAL SCHOOL CARRIER / OCCUPATION ID / OCCUPATION (OTHERS) MARRIED / SINGLE / NUMBER OF FAMILY NUMBERS / INCOME / AMOUNT OF SAVING HOUSE IN POSSESSION OR NOT / CAR / PISTON DISPLACEMENT / MODEL MOTORCYCLE / PISTON DISPLACEMENT / MODEL CURRENT PET / DESIRED PET HOBBY / MUSIC / MOVIE SPECTATOR SPORTS / SPORTS / FISHING GENRE OF INTEREST (DESIRED INFORMATION) (ID LIST)
	PERSONAL INFORMATION TABLE	TO ANOTHER DB
	MAIL SERVICE INFORMATION	NUMBER OF MAIL MESSAGES MAXIMUM ENLARGEMENT LIMIT VALUE MINIMUM REDUCTION LIMIT VALUE P-CODE LIST (NUMBER CORRESPONDING TO NUMBER OF MAIL MESSAGES)
	DISTRIBUTION SERVICE INFORMATION	NUMBER OF REGISTERED DATA P-CODE LIST (NUMBER CORRESPONDING TO NUMBER OF DISTRIBUTED DATA)
	PERSONAL INFORMATION SERVICE INFORMATION	NUMBER OF FRAME DATA P-CODE LIST (NUMBER CORRESPONDING TO NUMBER OF FRAME DATA)
		PRIORITY FOR LAYOUT PAPER SIZE DIRECTION OF PAPER AMOUNT OF ADVERTISEMENT (e.g., USE OF LOWER SURFACE)

FIG. 10

MAIL SERVICE P-CODE TABLE		
P-CODE (TELEPHONE NUMBER#NUMBER)	PROPERTIES OF MAIL	SUBJECT SENDER DATE AND TIME OF TRANSMISSION
	ENTITY FILE INFORMATION	NUMBER OF FILES (INCLUDING ATTACHED FILE) FILE NAME (LIST CORRESPONDING TO NUMBER OF FILES)

FIG. 11

DISTRIBUTION SERVICE P-CODE TABLE		
P-CODE (TELEPHONE NUMBER-NUMBER)	PROPERTIES OF REGISTERED INFORMATION	TITLE * DATE OF INFORMATION REGISTRATION VALID DATES OF INFORMATION PASSWORD (PASSWORD) FOR INFORMATION
	ENTITY FILE INFORMATION	NUMBER OF FILES (INCLUDING ATTACHED FILE) FILE NAME (LIST CORRESPONDING TO NUMBER OF FILES)

FIG. 12

PERSONAL INFORMATION SERVICE P-CODE TABLE			
P-CODE (TELEPHONE NUMBER#NUMBER)	PROPERTIES OF PERSONAL P-CODE INFORMATION	TITLE DATE OF FINAL PRINTING PRINTING PAPER INFORMATION	
			PRIORITY FOR LAYOUT PAPER SIZE DIRECTION OF PAPER AMOUNT OF ADVERTISEMENT (e.g., USE OF LOWER SURFACE)
	REGISTERED P-CODE INFORMATION	NUMBER OF REGISTERED P-CODES P-CODE LIST (INDICATING FRAME)	

FIG. 13

PERSONAL INFORMATION TABLE			
USER-ID	PHONETIC TRANSCRIPTION (LAST NAME)		
	PHONETIC TRANSCRIPTION (FAMILY NAME)		
	NAME (FAMILY NAME)		PRIORITY FOR LAYOUT
	NAME (FIRST NAME)		PAPER SIZE
	NAME (MIDDLE NAME)		DIRECTION OF PAPER
	POSTAL CODE		AMOUNT OF ADVERTISEMENT
	ADDRESS		(e.g., USE OF LOWER SURFACE)
	TELEPHONE NUMBER		
	FAX NUMBER		
	PORTABLE TELEPHONE NUMBER		
	E-MAIL ADDRESS		
	PASSWORD		
	NAME OF COMPANY		
	BUSINESS CATEGORY ID		
	BUSINESS CATEGORY (OTHERS)		
	NAME OF DEPARTMENT / SECTION		
	POST		
	JOB		
	POSTAL CODE OF COMPANY		
	ADDRESS OF COMPANY		
	TELEPHONE NUMBER OF COMPANY		
	FAX NUMBER OF COMPANY		
	PAYER INFORMATION		
	USE DISK AREA INFORMATION		
	CHARGE RECORD		
		CREDIT CARD COMPANY FOR SETTLEMENT	
		CARD NUMBER	
		VALID DATES OF CARD	

FIG. 14

OWNER INFORMATION TABLE		SAME AS PERSONAL INFORMATION TABLE	
USER-ID		NAME OF COMPANY / NAME POSTAL CODE OF COMPANY ADDRESS OF COMPANY TELEPHONE NUMBER OF COMPANY FAX NUMBER OF COMPANY E-MAIL ADDRESS OF PERSON IN CHARGE PASSWORD BUSINESS CATEGORY ID BUSINESS CATEGORY (OTHERS) NAME OF DEPARTMENT / SECTION PAYER INFORMATION	
			BANK OF PAYER BANK ACCOUNT OF PAYER CONTRACT TERM
			USE DISK AREA INFORMATION CHARGE RECORD

FIG. 15

TERMINAL INFORMATION TABLE	
TERMINAL ID	OWNER ID
	REGION INFORMATION
	TYPE OF TERMINAL
	REGION INFORMATION
	VERSION OF TERMINAL
	VERSION OF TERMINAL SOFTWARE
	TERMINAL INPUT DEVICE INFORMATION
	CAPACITY OF TERMINAL STORAGE DEVICE
	TERMINAL OUTPUT DEVICE INFORMATION
	LANGUAGE
	PRINTING ABILITY
	TERMINAL STATE INFORMATION
	PRINTING SPOOL STATE
	INFORMATION OF REMAINING CAPACITY OF STORAGE DEVICE
	P-CODE CACHE STATE

FIG. 16

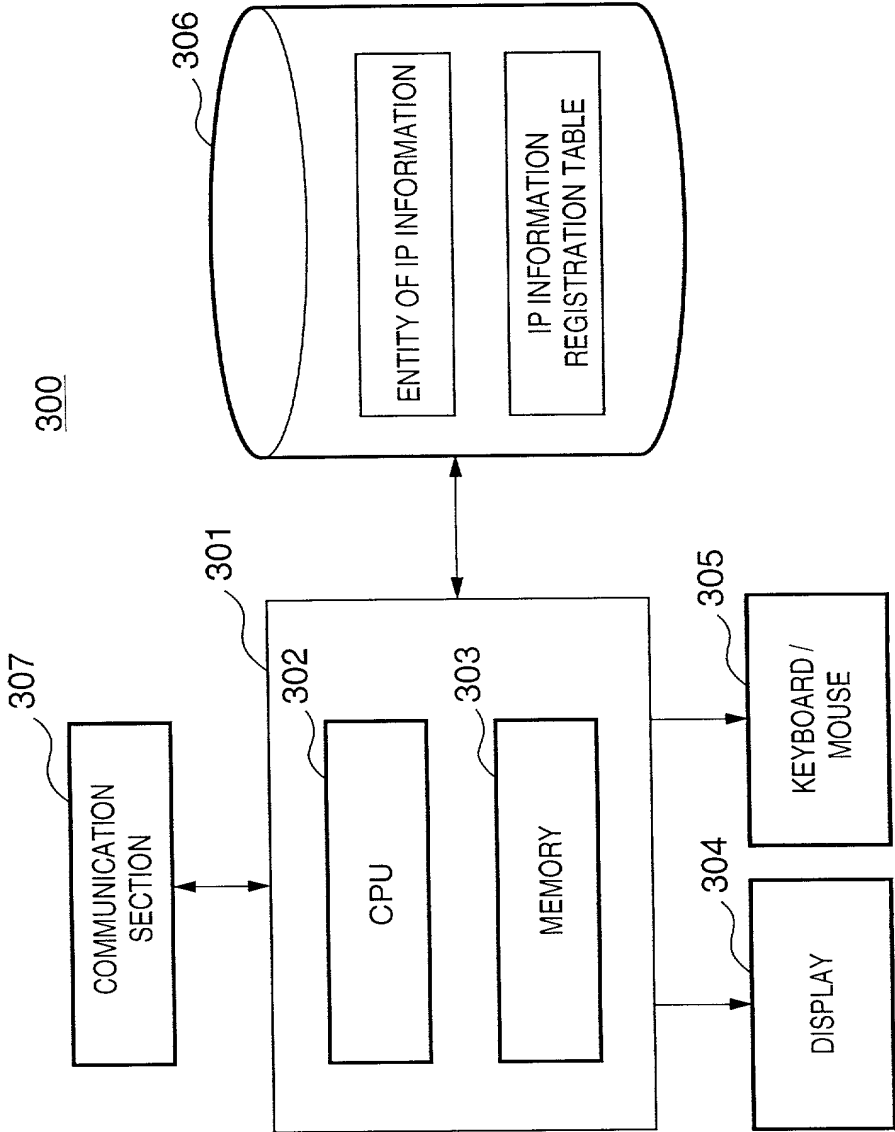
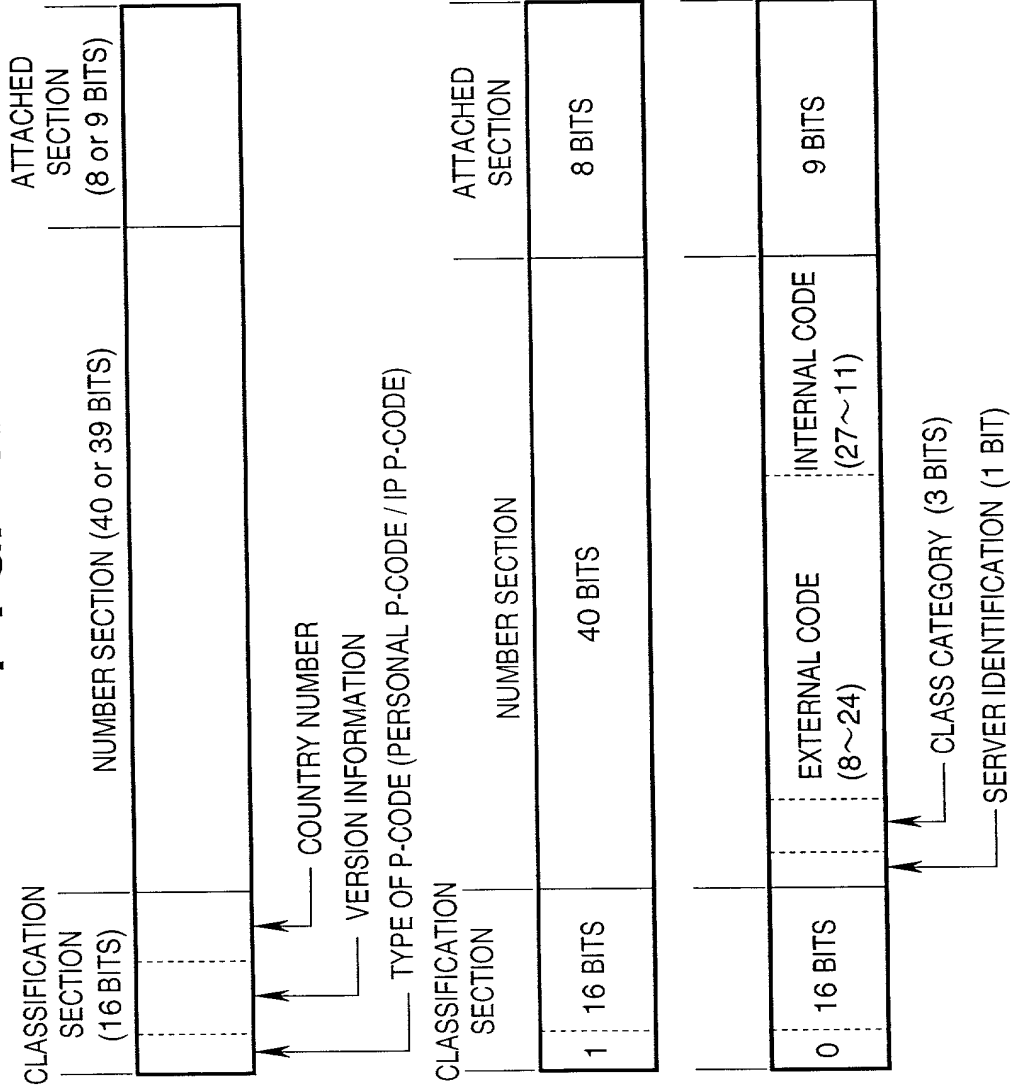
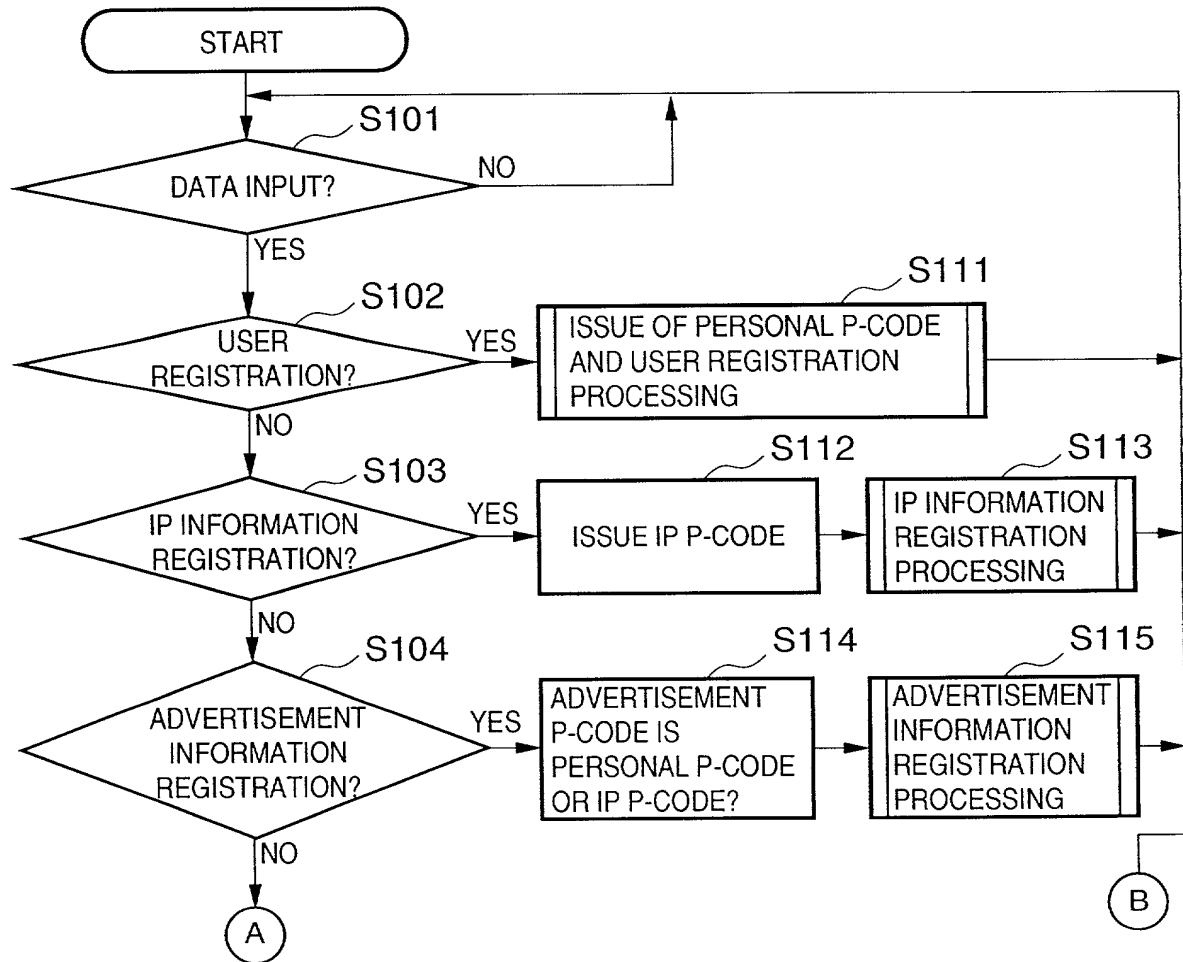


FIG. 17



Bit	CONTENTS OF P-CODE				
1	0 : INFORMATION P-CODE (BIT REPRESENTING WHETHER P-CODE IS TELEPHONE CODE)				1 : PERSONAL USER P-Code
2 ~ 8	VERSION BITS (7 BITS)				VERSION BITS (7 BITS)
9 ~ 16	COUNTRY NUMBER IDENTIFICATION BITS (8 BITS) (NORMALLY NOT INPUT BY USER)				COUNTRY NUMBER IDENTIFICATION BITS (8 BITS) (NORMALLY NOT INPUT BY USER)
17	CanDI SERVER IDENTIFICATION BIT (= 1 : CanDI SERVER)				TELEPHONE NUMBER (INTEGER HAVING 12 DIGITS AT MAXIMUM) (40 BITS)
18	IP SCALE IDENTIFICATION BITS (3 BITS)				
19	(=1: MINIMAL SCALE, = 2 : SMALL SCALE, = 3 : MEDIUM SCALE,				
20	= 4 : LARGE SCALE, = 5 : MAXIMAL SCALE)				
21 ~ 28	SITE IDENTIFICATION BITS (24 BITS) (FOR IP IN MINIMAL SCALE), NUMBER OF REGISTER-ABLE IPS IS 16,000,000	SITE IDENTIFICATION BITS (20 BITS) (FOR IP IN SMALL SCALE), NUMBER OF REGISTER-ABLE IPS IS 1,048,575	SITE IDENTIFICATION BITS (16 BITS) (FOR IP IN MEDIUM SCALE), NUMBER OF REGISTER-ABLE IPS IS 65,535	SITE IDENTIFICATION BITS (12 BITS) (FOR IP IN LARGE SCALE), NUMBER OF REGISTER-ABLE IPS IS 2,047	SITE IDENTIFICATION BITS (8 BITS) (FOR IP IN MAXIMAL SCALE AND CanDI SERVER), THE MAXIMUM NUMBER OF REGISTER-ABLE IPS IS 256
29 ~ 32					INDIVIDUAL INFORMATION ID BITS (27 BITS), EACH IP CAN REGISTER UP TO ABOUT 130,000,000 PIECES OF INFORMATION
33 ~ 36					
37 ~ 40					
41 ~ 44					
45 ~ 55	INDIVIDUAL INFORMATION ID BITS (11 BITS), EACH IP CAN REGISTER UP TO ABOUT 2,047 PIECES OF INFORMATION	INDIVIDUAL INFORMATION ID BITS (15 BITS), EACH IP CAN REGISTER UP TO ABOUT 32,767 PIECES OF INFORMATION	INDIVIDUAL INFORMATION ID BITS (19 BITS), EACH IP CAN REGISTER UP TO ABOUT 500,000 PIECES OF INFORMATION	INDIVIDUAL INFORMATION ID BITS (23 BITS), EACH IP CAN REGISTER UP TO ABOUT 8,000,000 PIECES OF INFORMATION	
56 57 58 59	SURFIX (9 BITS), 512 PIECES AT MAXIMUM				TYPE OF SURFIX (3 BITS), 7 TYPES AT MAXIMUM
60 61 62 63 64					SURFIX (5 BITS), 31 PIECES AT MAXIMUM

FIG. 19



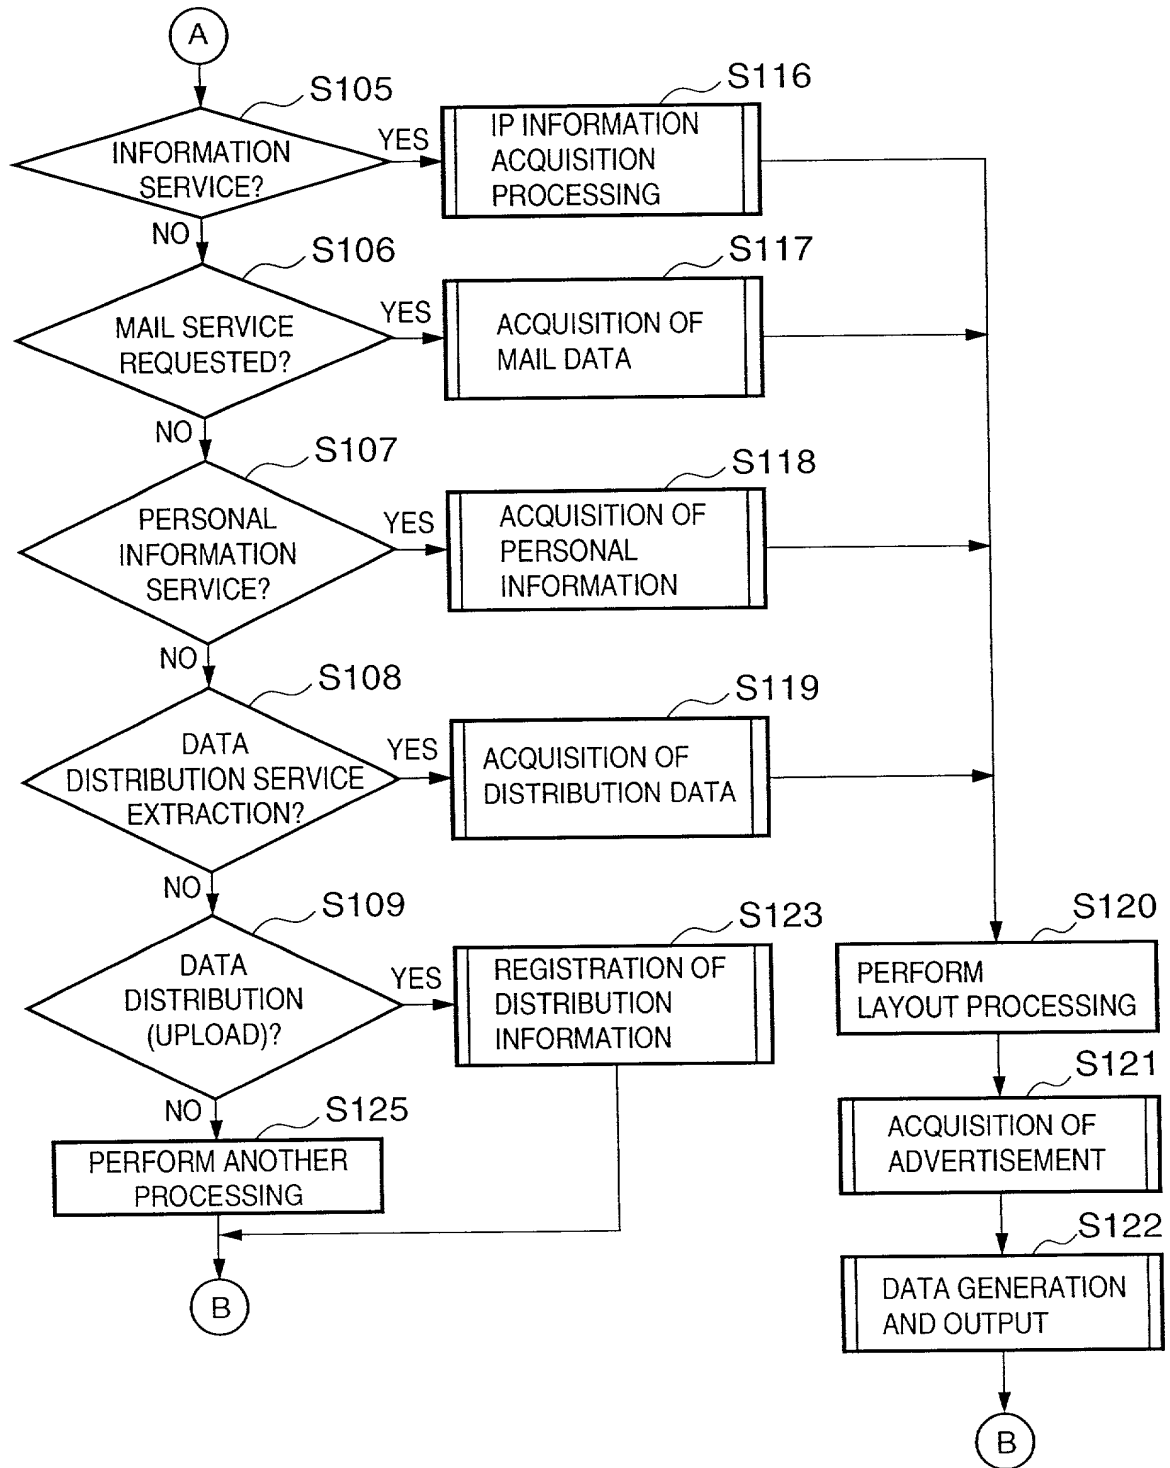


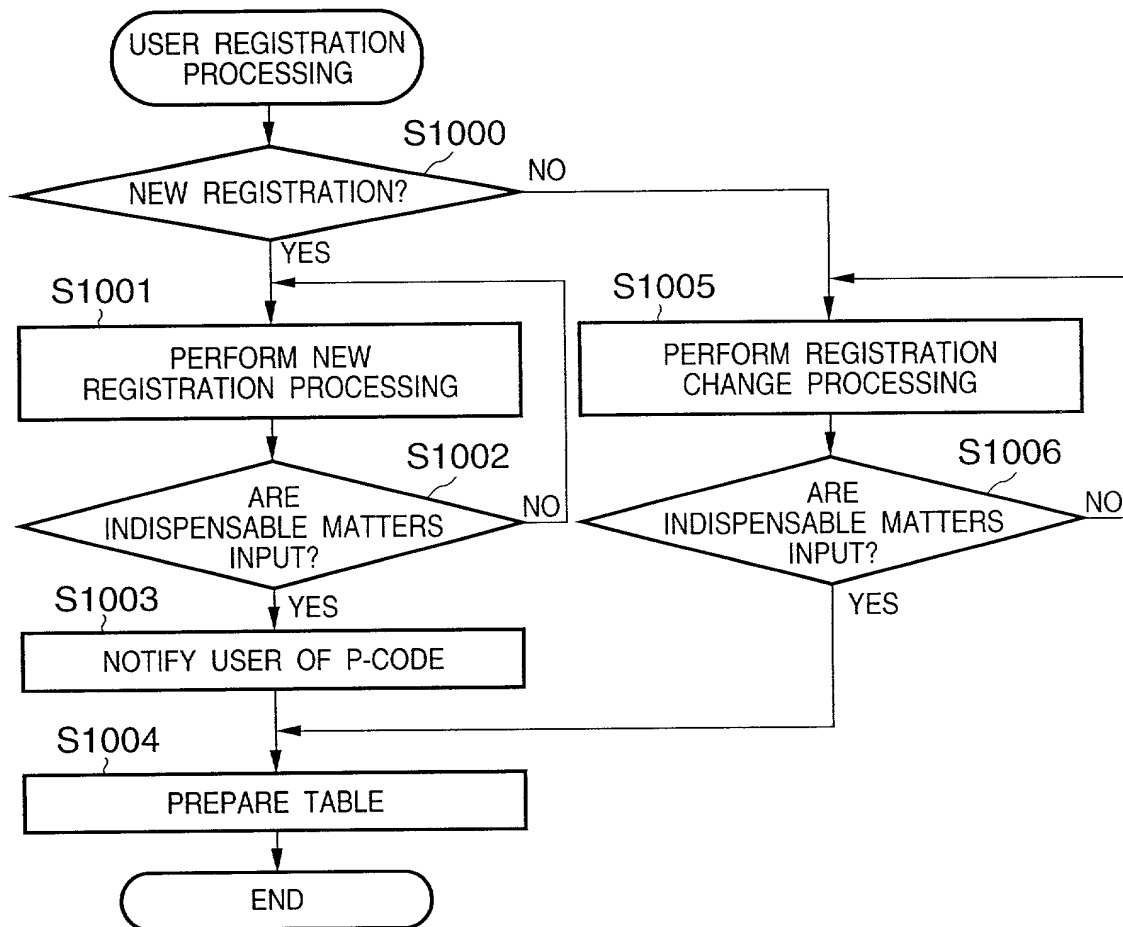
FIG. 21

FIG. 22

USER ID : NEW REGISTRATION

1000	NAME / ADDRESS (<u>N</u>)	PASSWORD (<u>P</u>)	1010
1020	PLACE OF EMPLOYMENT (<u>A</u>)	CREDIT CARD (<u>C</u>)	1030
1040	SERVICE (<u>S</u>)	PERSONAL INFORMATION (<u>U</u>)	1050
1060	PERSONAL INFORMATION 2 (<u>D</u>)	DESIRED INFORMATION (<u>T</u>)	1070
1080	PRINTING PAPER (<u>Q</u>)	FAVORITE INFORMATION REGISTRATION (<u>R</u>)	1090

OK CANCEL

FIG. 23

PHONETIC TRANSCRIPTION (K) : KOSUGI TARO

NAME (N) : KOSUGI TARO

HOME

POSTAL CODE (Z) : 211 - 0000

ADDRESS (A) : 10-2, 5-CHOME, KAWASAKI-SHI, TOKYO

TELEPHONE NUMBER (T) : - -

FAX NUMBER (F) : - -

PORTABLE TELEPHONE NUMBER (C) : 090 - 0289 - 2345

E-MAIL ADDRESS (E) : kosugi@canon

OK CANCEL

FIG. 24

USER ID : NEW REGISTRATION MEMBER

PASSWORD (P) :

PASSWORD (FOR CONFIRMATION_) (Q) :

OK CANCEL

FIG. 25

A screenshot of a data entry form titled "PLACE OF EMPLOYMENT". The form contains the following fields and values:

- NAME OF COMPANY (C): CANON INC.
- BUSINESS CATEGORY (K): MANUFACTURING (selected via dropdown) OTHERS (with an empty input field)
- NAME OF DEPARTMENT / SECTION (D): MA PROJECT
- POST (&P): SECTION MANAGER JOB (B): TECHNICAL EMPLOYEE
- POSTAL CODE (Z): 211 - 0000
- ADDRESS (A): 1-2-5, YAMASHITA-CHO, CHUO-KU, KAWASAKI-SHI
- TELEPHONE NUMBER (T): 044 | - -
- FAX NUMBER (F): - -

At the bottom right of the form are two buttons: "OK" and "CANCEL".

FIG. 26

CREDIT CARD INFORMATION

CARD COMPANY

☐ VISA (V) ☐ MasterCard (M) ☐ AmericanExpress (A)

☐ JCB (J) ☒ DC (D)

CARD NUMBER (N): - - -

VALID DATES (P): /

OK CANCEL

FIG. 27

A graphical user interface window titled "SELECT SERVICE" with a close button (X) in the top right corner. The window contains three checkboxes with labels:

- ☒ MAIL SERVICE (M)
- ☒ PERSONAL INFORMATION SERVICE (P)
- ☐ DISTRIBUTION SERVICE (R)

At the bottom of the window are two buttons: "OK" and "CANCEL".

FIG. 28

DATE OF BIRTH (B): 99/04/01 ▼ BLOOD TYPE (L): A ▼

SEX (S): ☒ MALE ☐ FEMALE

FINAL SCHOOL CARRIER (G): UNIVERSITY/GRADUATE SCHOOL ▼

OCCUPATION (O): TECHNICAL EMPLOYEE ▼ OTHERS»

MARRIED/SINGLE (M): ☒ SINGLE ☐ MARRIED NUMBER OF FAMILY MEMBERS (A): ONE ▼

INCOME (I): ¥ 3,000,000 TO ¥ 5,000,000 ▼ AMOUNT OF SAVING (F): ¥ 1,000,000 OR LESS ▼

OK CANCEL

FIG. 29

HOUSE (P) ☐ DETACHED HOUSE ☒ APARTMENT HOUSE ☐ RENTAL HOUSE
☐ COMPANY HOUSE / DORMITORY ☐ HOUSE OWNED BY RELATIVE

CAR etc. (C) ☒ PRIVATE CAR PISTON DISPLACEMENT 1500~2000 ▼ MODEL RV ▼
☐ MOTOR-CYCLE PISTON DISPLACEMENT ▼ MODEL ▼

PET (P) ☐ PET TYPE ▼
☒ DESIRED PET TYPE DOG ▼

HOBBY (H) ☒ MUSIC LISTENING FAVORITE GENRE ROCK-'N'-ROLL ▼
☒ MOVIEGOING FAVORITE GENRE SF ▼
☒ SPECTATOR SPORTS FAVORITE GENRE PROFESSIONAL BASEBALL ▼
☒ SPORTS FAVORITE GENRE SANDLOT BASEBALL ▼
☐ FISHING FAVORITE PLACE ▼

OK CANCEL

FIG. 30

KEYWORD SEARCH

SEARCH

OK

CANCEL

DESIRED INFORMATION

☐ ☒ ECONOMY

☐ ☒ MARKET

☐ ☒ MARKET OUTLOOK

☐ ☒ DOMESTIC

☐ ☒ DOMESTIC MARKET OUTLOOK

☐ ☒ MERCHANDISE

☐ ☒ STOCK PRICE

☐ ☒ STOCK PRICE OUTLOOK

☐ ☒ FIRST SECTION OF TOKYO STOCK EXCHANGE

☐ ☒ DOW-JONES AVERAGE

☐ ☒ SPECIALLY DESIGNATED STOCK

☐ ☒ SECOND SECTION OF TOKYO STOCK EXCHANGE

☐ ☒ INTERNATIONAL

☐ ☒ EXCHANGE

☐ ☒ EXCHANGE OUTLOOK

☐ ☒ EACH MARKET

☐ ☒ ENTERTAINMENT

☐ ☒ SPORTS

FIG. 31

AUTOMATIC LAYOUT SETTING

☒ VISIBILITY PRIORITY ☐ PAGE COUNT PRIORITY

☐ DESIGNATE DEFAULT LAYOUT (D)
LAYOUT 1

DETAILS (P)

DEFAULT PAPER

PAPER SIZE (S) A4 ▼

DIRECTION OF PAPER (L) ☒ PORTRAIT ☐ LANDSCAPE

☒ PRIORITY TO DOUBLE-SIDE PRINTING (R)

OK CANCEL

FIG. 32

USER ID : 09001234567

1000' NAME / ADDRESS (<u>N</u>)	PASSWORD (<u>P</u>) 1010'
1020' PLACE OF EMPLOYMENT (<u>A</u>)	CREDIT CARD (<u>C</u>) 1030'
1040' SERVICE (<u>S</u>)	PERSONAL INFORMATION (<u>U</u>) 1050'
1060' PERSONAL INFORMATION 2 (<u>D</u>)	DESIRED INFORMATION (<u>T</u>) 1070'
1080' PRINTING PAPER (<u>Q</u>)	FAVORITE INFORMATION REGISTRATION (<u>R</u>) 1090'

OK CANCEL

FIG. 33

A login dialog box with a title bar containing a close button (X). The dialog contains the following text and input fields:

USER ID : 09082937251

CURRENT PASSWORD (C) :

PASSWORD (P) :

PASSWORD
(FOR CONFIRMATION) (Q) :

At the bottom right, there are two buttons: "OK" and "CANCEL".

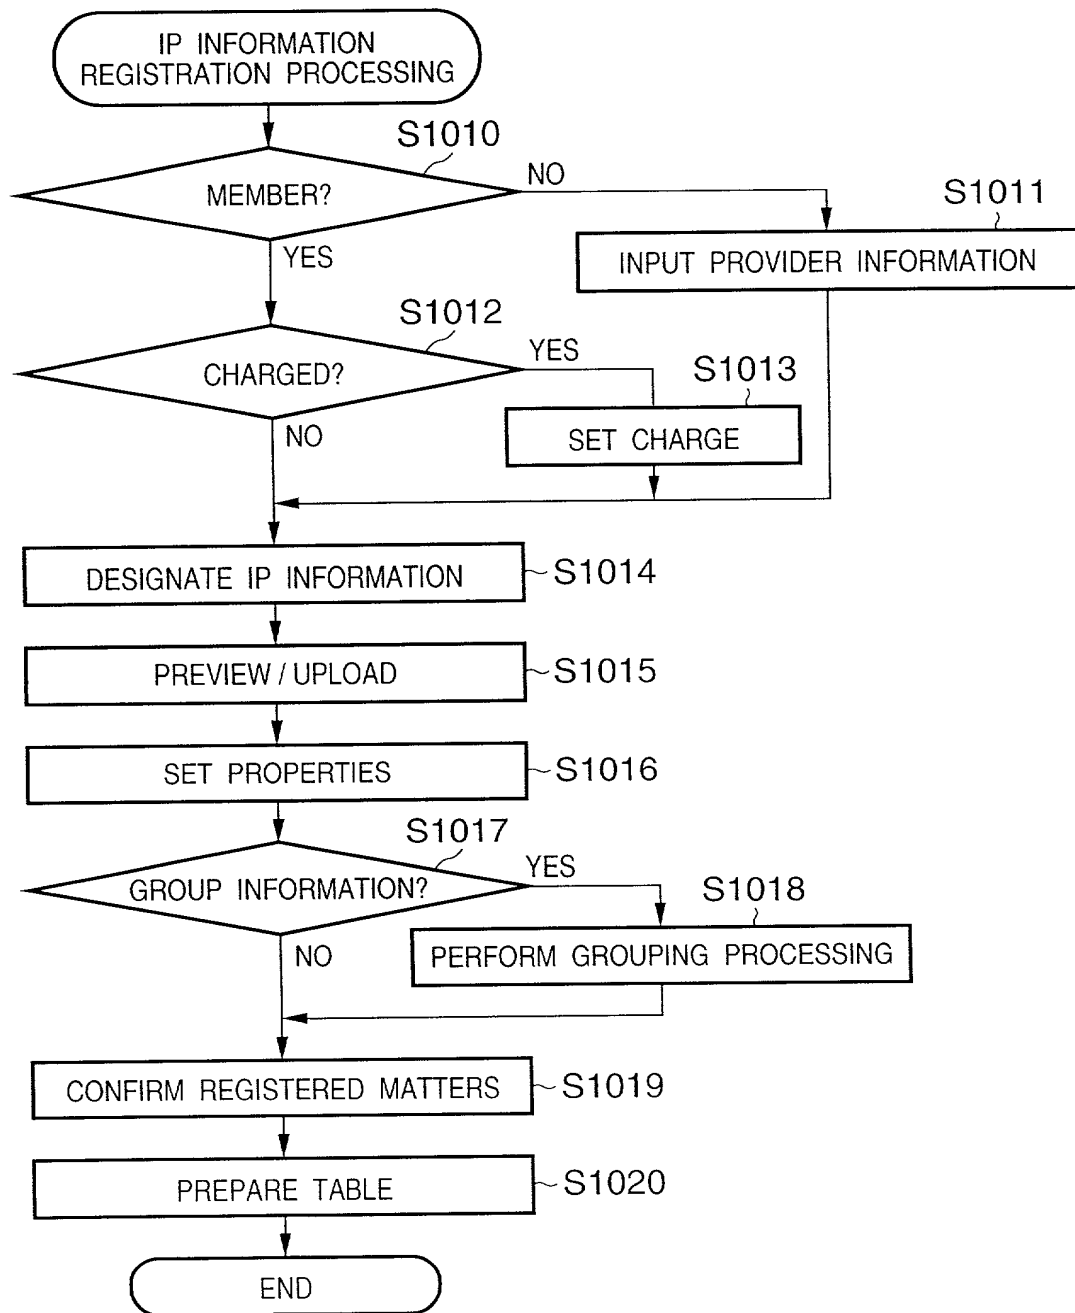
FIG. 34

FIG. 35

ARE YOU A MEMBER?

☒ YES (Y)

MEMBERSHIP NUMBER (C):

☐ NO (N)

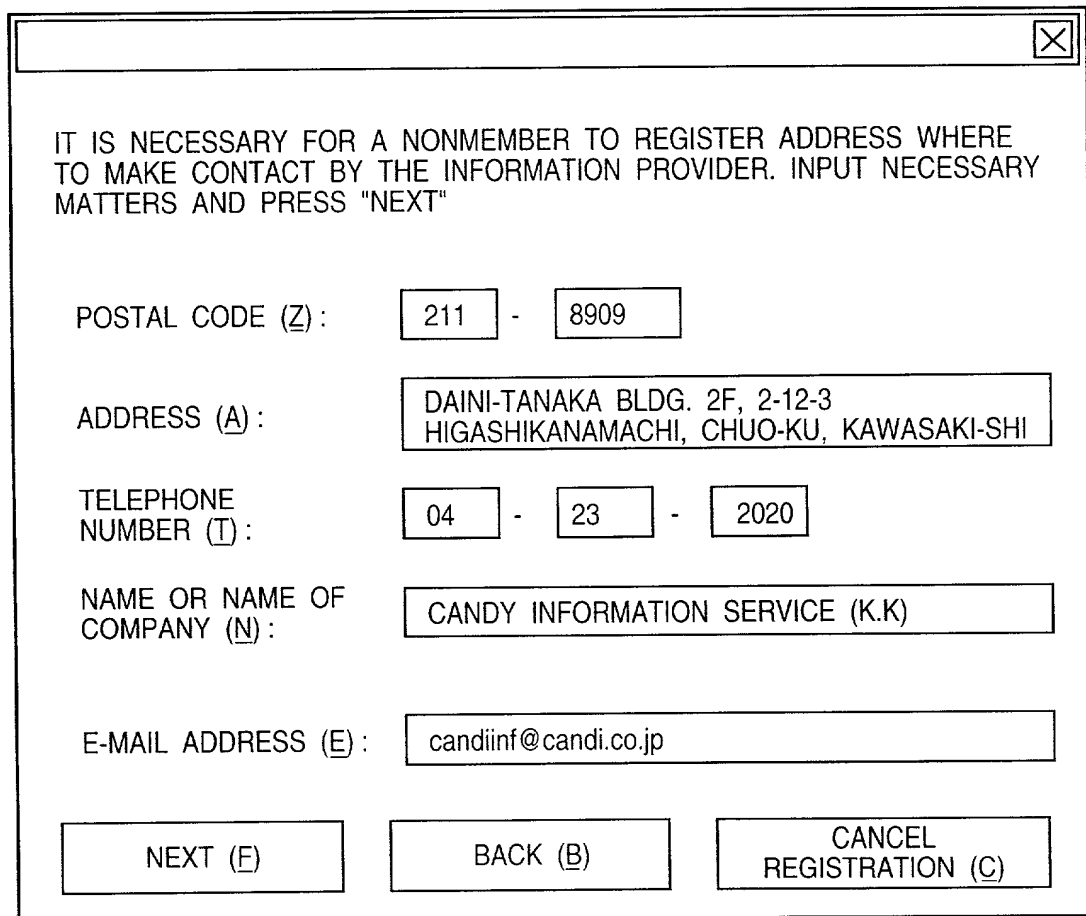
NEXT (F)

CANCEL (C)

FIG. 36

INPUT PASSWORD OF MEMBER ID CA_INF_0023 (P) :

NEXT (F) BACK (B) CANCEL REGISTRATION (C)

FIG. 37

IT IS NECESSARY FOR A NONMEMBER TO REGISTER ADDRESS WHERE TO MAKE CONTACT BY THE INFORMATION PROVIDER. INPUT NECESSARY MATTERS AND PRESS "NEXT"

POSTAL CODE (Z): -

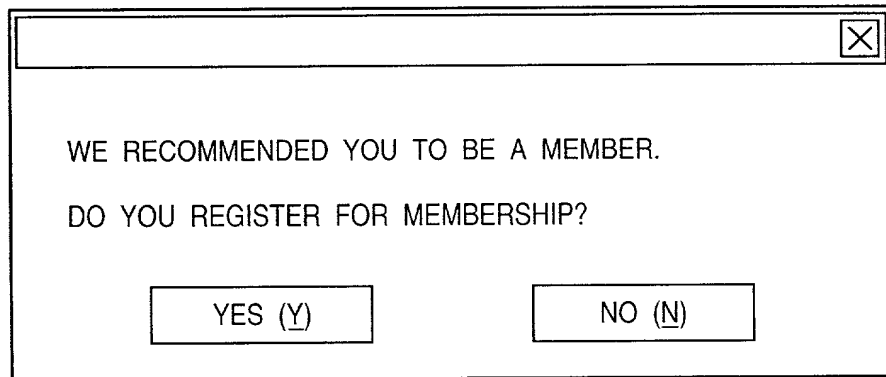
ADDRESS (A):

TELEPHONE NUMBER (T): - -

NAME OR NAME OF COMPANY (N):

E-MAIL ADDRESS (E):

FIG. 38

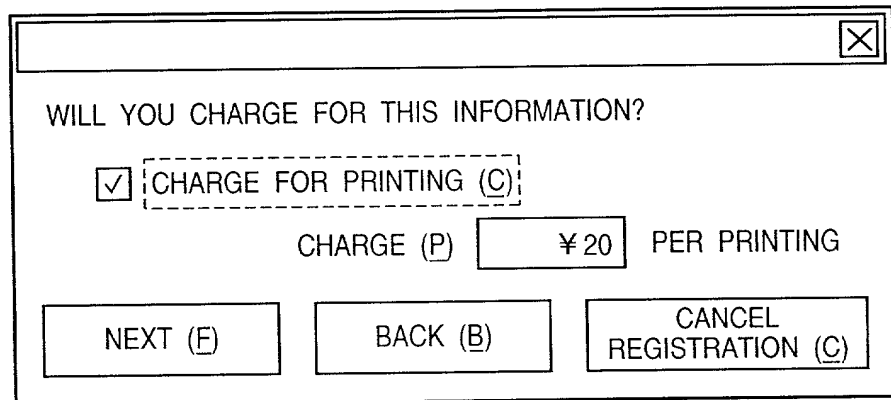


WE RECOMMENDED YOU TO BE A MEMBER.

DO YOU REGISTER FOR MEMBERSHIP?

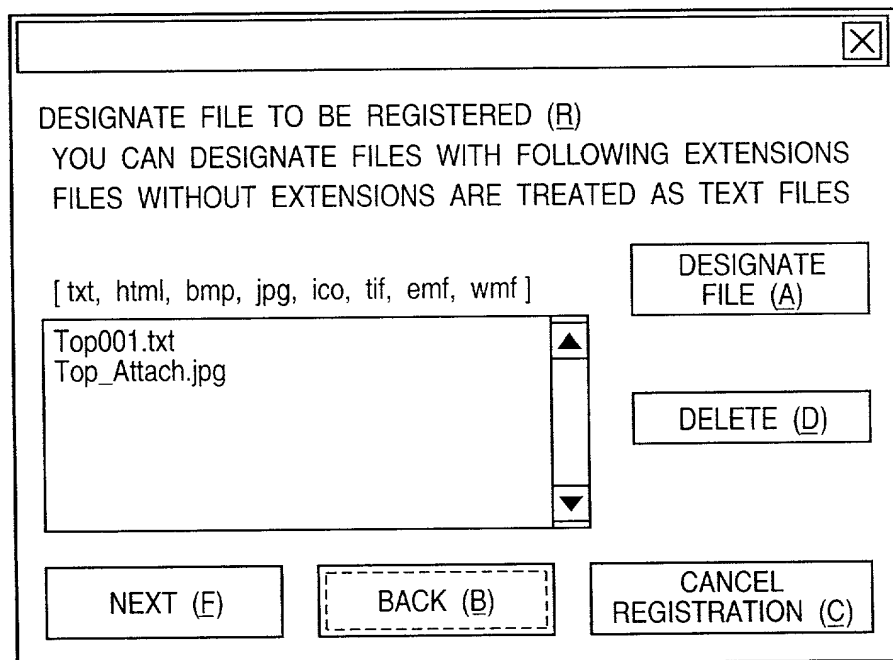
YES (Y) NO (N)

FIG. 39



A screenshot of a software dialog box with a title bar containing a close button (X). The dialog box contains the following elements:

- Text: "WILL YOU CHARGE FOR THIS INFORMATION?"
- Form: A checked checkbox followed by the text "CHARGE FOR PRINTING (C)". The text "CHARGE FOR PRINTING (C)" is enclosed in a dashed rectangular border.
- Text: "CHARGE (P)" followed by a text input field containing "¥ 20", followed by the text "PER PRINTING".
- Buttons: Three buttons at the bottom: "NEXT (F)", "BACK (B)", and "CANCEL REGISTRATION (C)".

FIG. 40

41/119

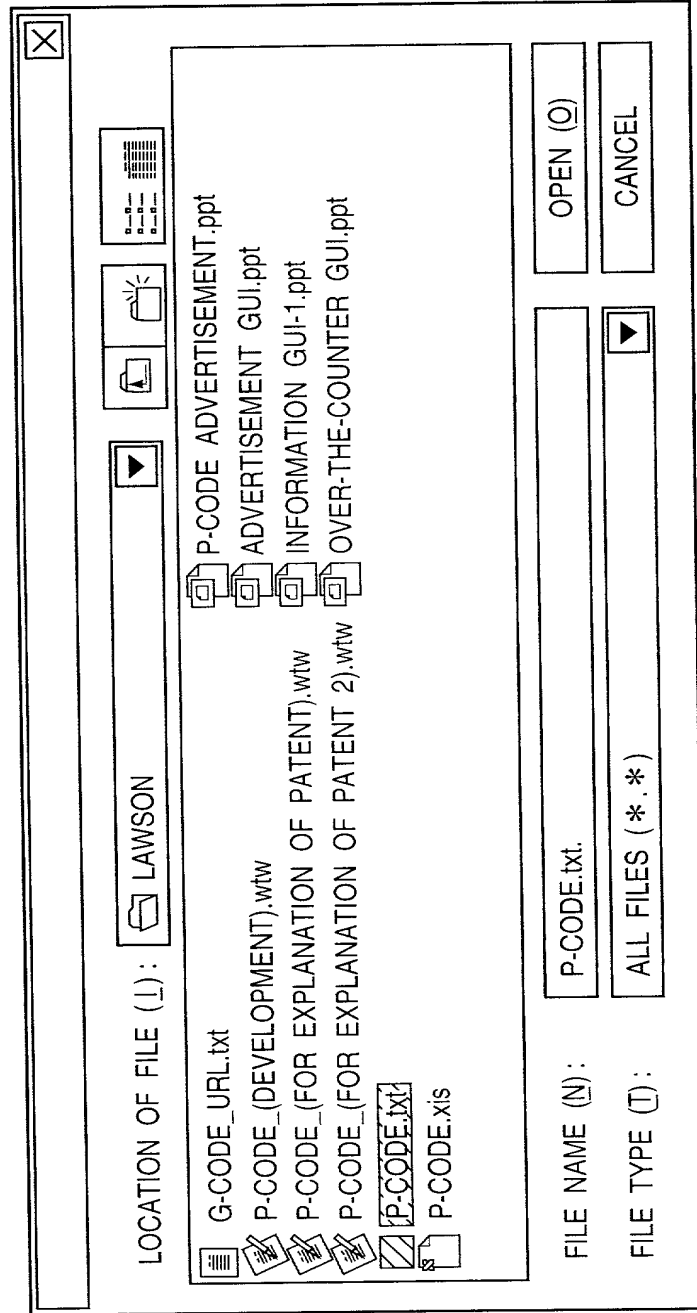


FIG. 42

PRINT PREVIEW OF TRANSFERRED INFORMATION IS
AS FOLLOWS

PICTURE

TRANSFER TO
SERVER (T)

BACK (B)

CANCEL
REGISTRATION (C)

FIG. 43

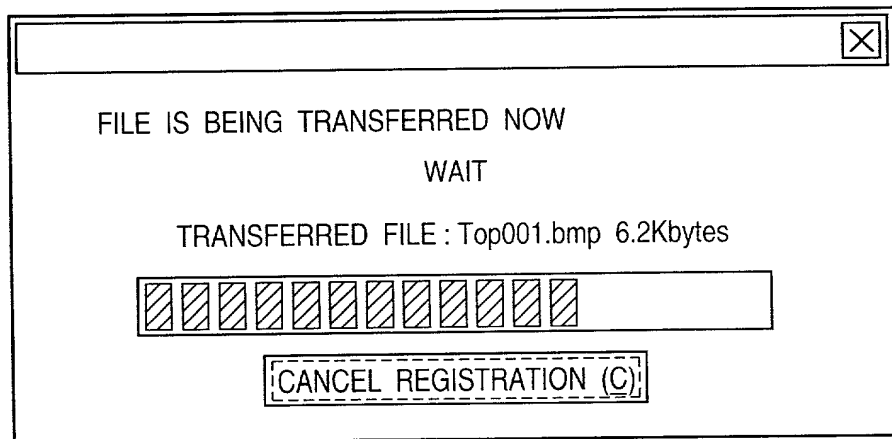


FIG. 44

SET DATE OF START OF INFORMATION INSERTION (S) APRIL 15, 1999 ▼

SET VALID DATES OF INFORMATION

☐ INDEFINITE (I)

☐ ONE WEEK (W)

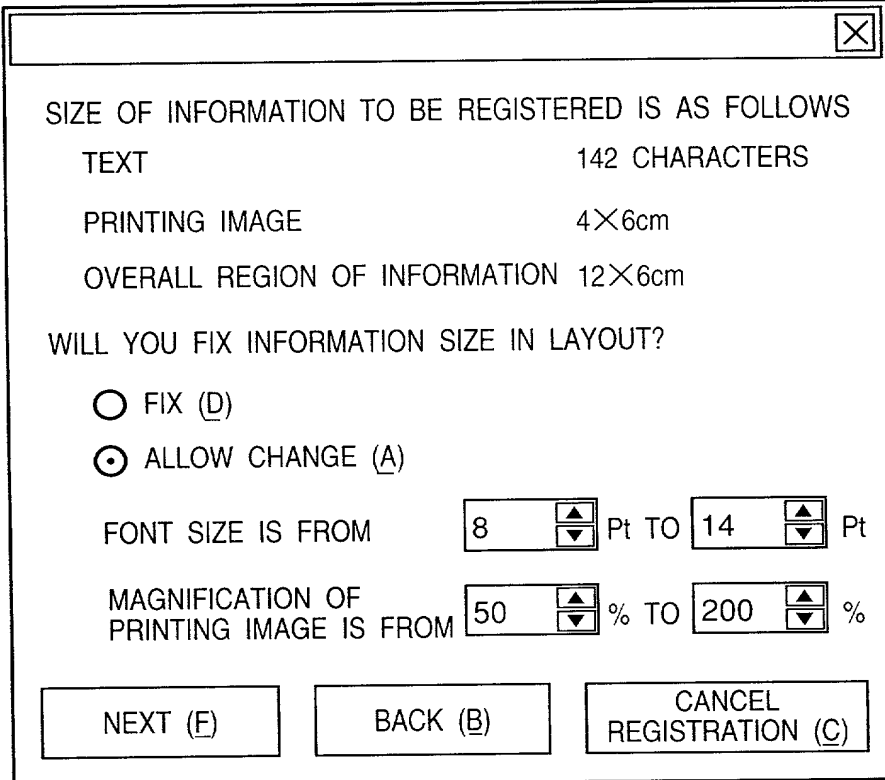
☐ ONE MONTH (M)

☐ ONE YEAR (Y)

☐ DESIGNATE DATE (D) APRIL 30, 1999 ▼

☒ VALID DATES OF P-CODE IS SET INDEPENDENTLY OF THAT OF INFORMATION (F) MAY 31, 1999 ▼

NEXT (F) BACK (B) CANCEL REGISTRATION (C)

FIG. 45



SIZE OF INFORMATION TO BE REGISTERED IS AS FOLLOWS

TEXT	142 CHARACTERS
PRINTING IMAGE	4×6cm
OVERALL REGION OF INFORMATION	12×6cm

WILL YOU FIX INFORMATION SIZE IN LAYOUT?

☐ FIX (D)

☒ ALLOW CHANGE (A)

FONT SIZE IS FROM  Pt TO  Pt



MAGNIFICATION OF
PRINTING IMAGE IS FROM  % TO  %

FIG. 46

A graphical user interface (GUI) dialog box with a title bar and a close button (X) in the top right corner. The main text asks: "WILL YOU PERMIT ADVERTISEMENT INSERTION INTO THE PAGE?". Below this text are three radio button options: "YES (Y)", "PERMIT FOR LOWER SURFACE (R)", and "NO (N)". The "YES (Y)" option is selected, indicated by a solid dot in the center of the radio button. At the bottom of the dialog box are three buttons: "NEXT (F)", "BACK (B)", and "CANCEL REGISTRATION (C)".

WILL YOU PERMIT ADVERTISEMENT INSERTION
INTO THE PAGE?

☒ YES (Y)

☐ PERMIT FOR LOWER SURFACE (R)

☐ NO (N)

NEXT (F) BACK (B) CANCEL
REGISTRATION (C)

FIG. 47

A graphical user interface window with a title bar containing a close button (X). The window contains the following elements:

- Text: "WILL YOU SET PASSWORD FOR ACCESS TO INFORMATION?"
- Text: ☒ SET PASSWORD (S)
- Text: PASSWORD (P):
- Text input field containing: * * * *
- Three buttons at the bottom: "NEXT (E)", "BACK (B)", and "CANCEL REGISTRATION (C)".

FIG. 48

A graphical user interface window with a title bar containing a close button (X). The main content area displays the text "RE-INPUT PASSWORD (P):" followed by a rectangular input field containing four asterisks "****". Below the input field, there are three rectangular buttons arranged horizontally: "REGISTER (R)", "BACK (B)", and "CANCEL REGISTRATION (C)".

FIG. 49

A screenshot of a software window titled "FIG. 49" showing a registration form. The window has a standard title bar with a close button (X) in the top right corner. The form contains several sections:

- SELECT GENRE OF INFORMATION TO BE REGISTERED (J)**: A dropdown menu with "SPORTS" selected.
- SELECT SUBGENRE OF INFORMATION TO BE REGISTERED (S)**: A dropdown menu with "BASKETBALL" selected.
- SET KEYWORD WHEN LINKED TO ADVERTISEMENT (K)**: A text input field containing "NBA".
- GAME RESULTS**: A list box containing "GAME RESULTS" and "PERSONAL RECORDS".
- PERSONAL RECORDS**: A list box containing "PERSONAL RECORDS".
- NEGATIVE LINK TO ADVERTISEMENT (N)**: A checkbox that is currently unchecked.
- Buttons**: "ADD (A)", "DELETE (D)", "NEXT (F)", "BACK (B)", and "CANCEL REGISTRATION (C)".

The form is enclosed in a rectangular border with a close button (X) in the top right corner.

FIG. 50

The screenshot shows a window titled "SELECT GENRE OF INFORMATION TO BE REGISTERED (J)". Inside the window, there is a list of genres: SPORTS, TRAVEL, NEWS/WEATHER FORECAST, FINANCE, HOME MEDICINE, SOCIETY INFORMATION, INFORMATION OF ADMINISTRATIVE AGENCIES, and PRIZE COMPETITION. The "SPORTS" genre is selected and highlighted with a hatched pattern. To the left of the list, there are labels "SELEC" and "SET K" next to the "SPORTS" and "NBA" entries respectively. To the right of the list, there is a label "D (S)" next to the "SPORTS" entry. Below the list, there are two buttons: "GAME RESULTS" and "PERSONAL RECORDS". To the right of these buttons is a "DELETE (D)" button. At the bottom of the window, there is a checkbox labeled "NEGATIVE LINK TO ADVERTISEMENT (N)". Below the checkbox are three buttons: "NEXT (F)", "BACK (B)", and "CANCEL REGISTRATION (C)".

SELECT GENRE OF INFORMATION TO BE REGISTERED (J)

SPORTS

SELEC SPORTS

TRAVEL

NEWS/WEATHER FORECAST

FINANCE

SET K HOME MEDICINE

NBA SOCIETY INFORMATION

INFORMATION OF ADMINISTRATIVE AGENCIES

PRIZE COMPETITION

D (S)

GAME RESULTS

PERSONAL RECORDS

DELETE (D)

☐ NEGATIVE LINK TO ADVERTISEMENT (N)

NEXT (F) BACK (B) CANCEL REGISTRATION (C)

FIG. 51

INPUT TITLE OF INFORMATION (T)

NBA FINAL

INPUT COMMENT (SUMMARY) FOR INFORMATION
TO BE REGISTERED (S)

NEXT (F)

BACK (B)

CANCEL
REGISTRATION (C)

FIG. 52A

P-CODE TO BE REGISTERED (P)

xxxx xxxxx xxxxx

REGISTERED P-CODE LIST (L)

☐ CREATE NEW GROUP (N)

☒ ADD REGISTERED P-CODE TO EXISTING GROUP (A)

P-CODE OF GROUP TO WHICH P-CODE IS TO BE ADDED (G)

3091-2425-8769|

REGISTERED GROUP LIST (I)

OK

CANCEL

FIG. 52B

INPUT TITLE OF NEW GROUP (T)

GAMES OF YESTERDAY

INPUT CONTENTS OF GROUP (S)

GAME RESULTS OF YESTERDAY AND BRIEF COMMENT
AND STANDINGS

SET INFORMATION UPDATE SCHEDULE (M)

NEXT DAY OF GAME

OK

CANCEL

FIG. 52B

FIG. 52C

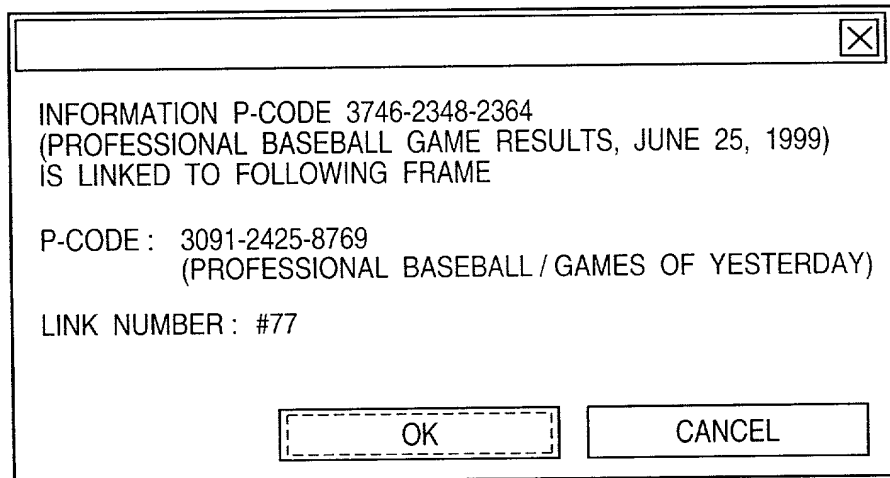


FIG. 53

PRESS REGISTER BUTTON TO END REGISTRATION

REGISTERED P-CODE IS 2010-4243-26227

FOLLOWING PROPERTIES ARE REGISTERED

REGISTERED FILE NAME :	▲
Top001.txt	
Top_attachi.bmp	
VALID DATES :	
APRIL 26, 1999	
PRINTING CHARGE :	
¥ 10/Print	▼

REGISTER (R) BACK (B) CANCEL
REGISTRATION (C)

FIG. 54

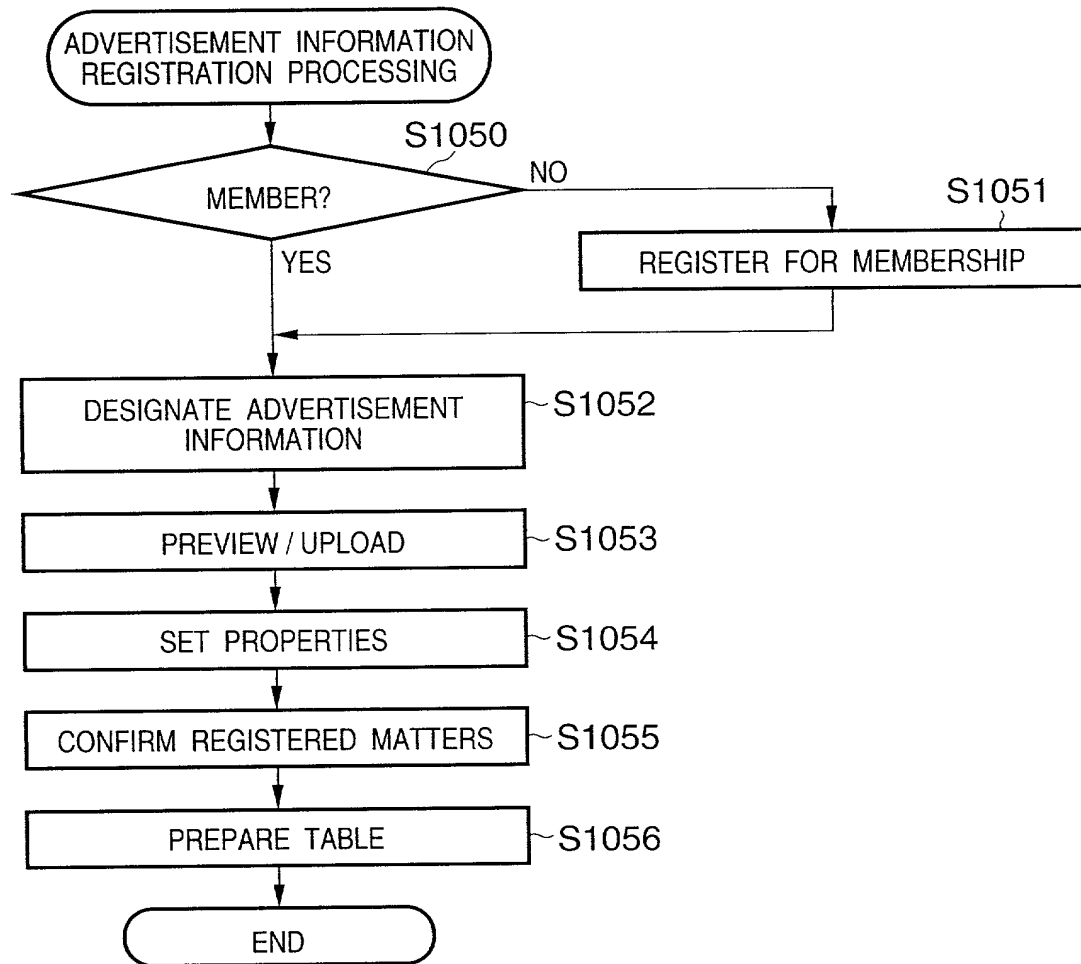


FIG. 55

ADVERTISEMENT WILL BE REGISTERED

ARE YOU AN ADVERTISEMENT REGISTRATION MEMBER?

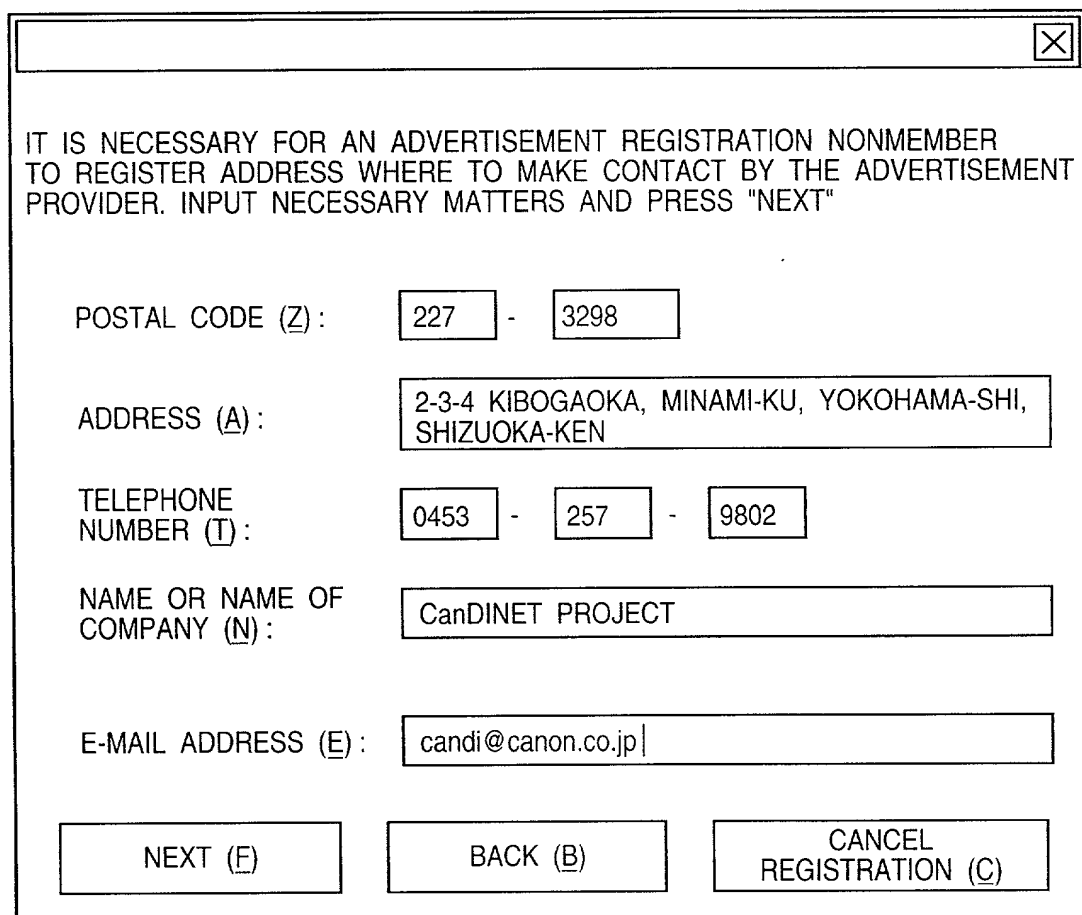
☐ YES (Y) MEMBERSHIP NUMBER (C):

☐ NO (N)

FIG. 56

INPUT PASSWORD OF ADVERTISEMENT
REGISTRATION
MEMBER ID CA_INF_0023 (P)

NEXT (F) BACK (B) CANCEL
REGISTRATION (C)

FIG. 57

IT IS NECESSARY FOR AN ADVERTISEMENT REGISTRATION NONMEMBER TO REGISTER ADDRESS WHERE TO MAKE CONTACT BY THE ADVERTISEMENT PROVIDER. INPUT NECESSARY MATTERS AND PRESS "NEXT"

POSTAL CODE (Z) : -

ADDRESS (A) :

TELEPHONE NUMBER (T) : - -

NAME OR NAME OF COMPANY (N) :

E-MAIL ADDRESS (E) :

FIG. 58

DESIGNATE FILE TO BE REGISTERED AS ADVERTISEMENT (R)
YOU CAN DESIGNATE FILES WITH FOLLOWING EXTENSIONS
FILES WITHOUT EXTENSIONS ARE TREATED AS TEXT FILES

[txt, html, bmp, jpg, ico, tif, emf, wmf]

Bargain_sale.txt
Bargain_sale.jpg

DESIGNATE FILE (A)

DELETE (D)

NEXT (F) BACK (B) CANCEL REGISTRATION (C)

FIG. 59

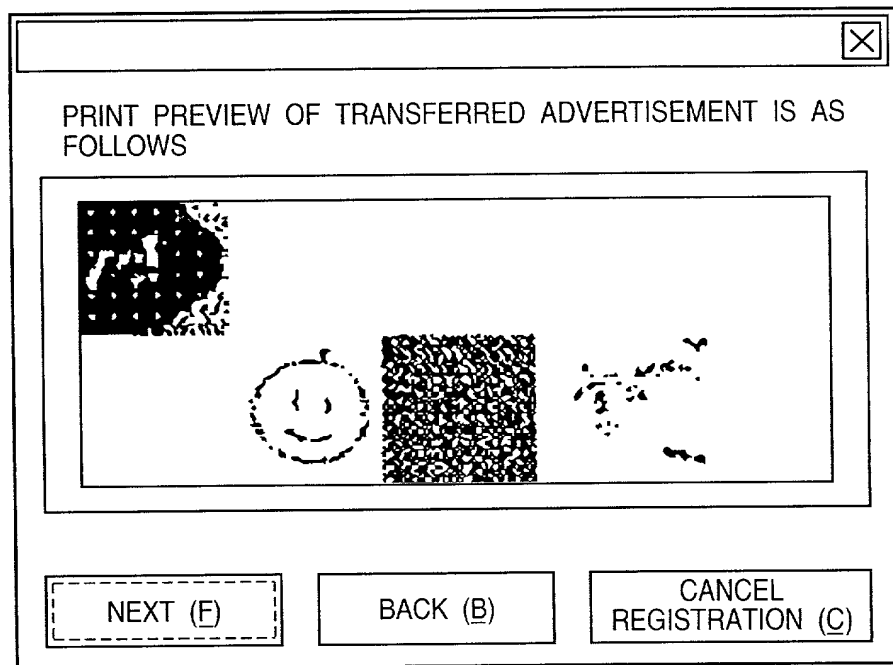


FIG. 60

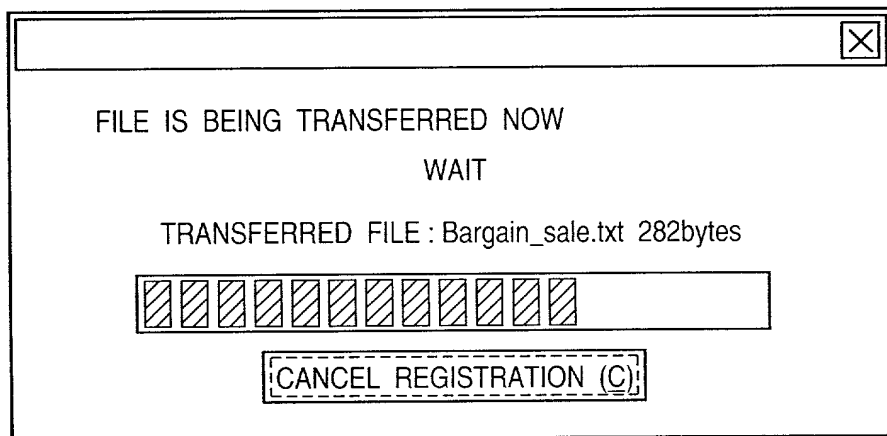


FIG. 61

A screenshot of a software dialog box titled "SET DATE OF START OF ADVERTISEMENT INSERTION (S)". The dialog box has a standard Windows-style title bar with a close button (X) in the top right corner. The main content area contains the following elements:

- The title text: "SET DATE OF START OF ADVERTISEMENT INSERTION (S)".
- A date selection field showing "MARCH 29, 1999" with a downward arrow button to its right.
- The text: "SET VALID DATES OF ADVERTISEMENT TO BE REGISTERED".
- A list of radio button options:
 - ☐ INDEFINITE (I)
 - ☐ ONE WEEK (W)
 - ☐ ONE MONTH (M)
 - ☐ ONE YEAR (Y)
 - ☒ DESIGNATE DATE (D)
- A date selection field for the designated date, showing "APRIL 10, 1999" with a downward arrow button to its right. The date "1999" is highlighted with a hatched pattern.
- Three buttons at the bottom:
 - "NEXT (F)"
 - "BACK (B)"
 - "CANCEL REGISTRATION (C)"

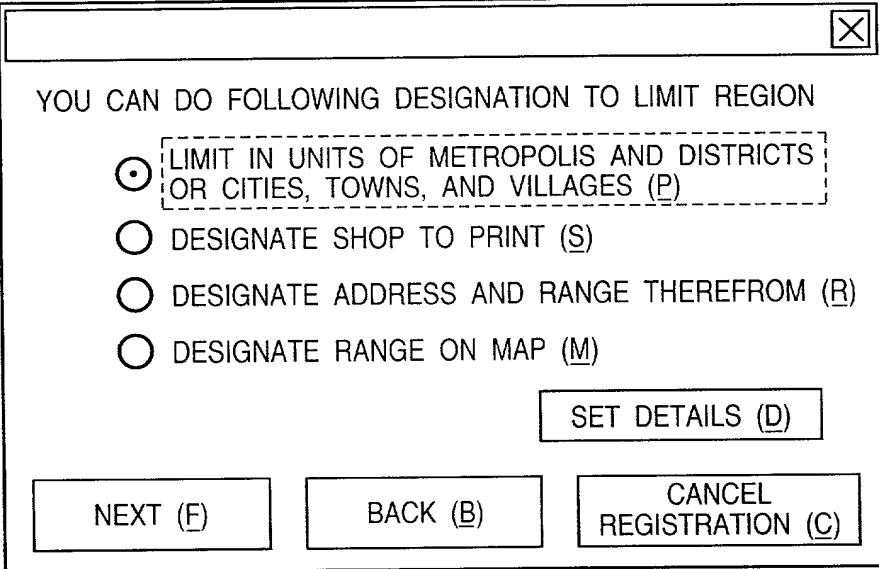
FIG. 62

SELECT LINK METHOD INFORMATION IN WHICH
ADVERTISEMENT IS TO BE INSERTED

☐ REGION
AGE GROUP
SEX
SET KEYWORD
DESIGNATE INFORMATION

SET DETAILS (D)

NEXT (F) BACK (B) CANCEL
REGISTRATION (C)

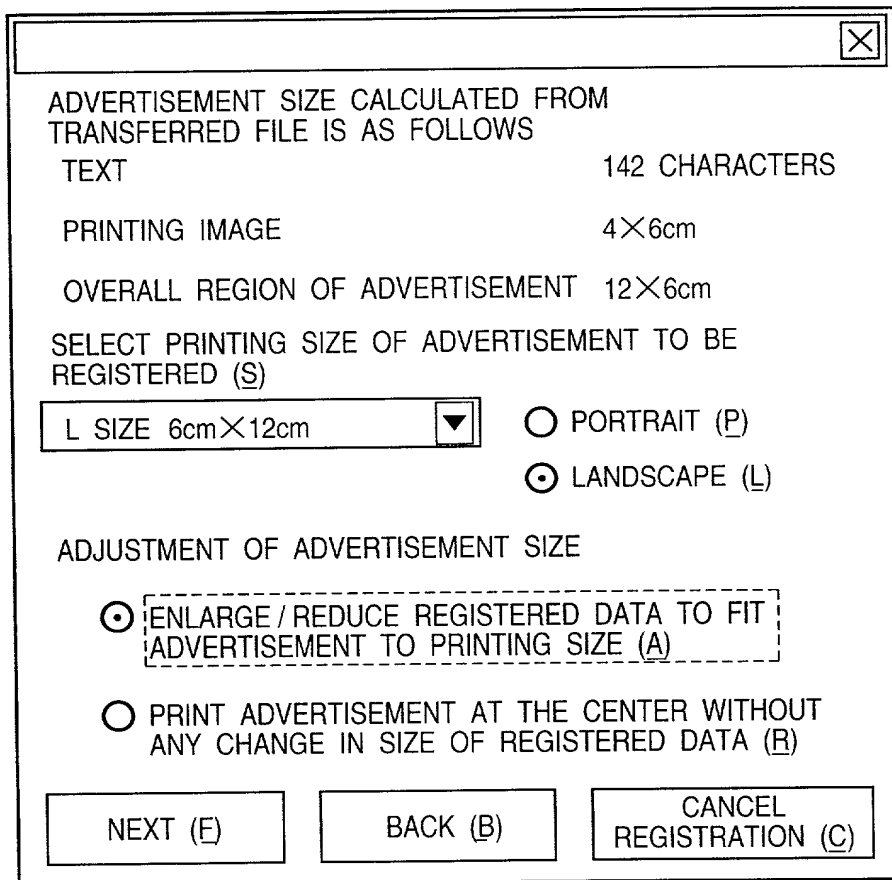
FIG. 63

YOU CAN DO FOLLOWING DESIGNATION TO LIMIT REGION

- ☒ LIMIT IN UNITS OF METROPOLIS AND DISTRICTS
OR CITIES, TOWNS, AND VILLAGES (P)
- ☐ DESIGNATE SHOP TO PRINT (S)
- ☐ DESIGNATE ADDRESS AND RANGE THEREFROM (R)
- ☐ DESIGNATE RANGE ON MAP (M)

SET DETAILS (D)

NEXT (F) BACK (B) CANCEL
REGISTRATION (C)

FIG. 64

A screenshot of a software dialog box titled "FIG. 64". The dialog box has a standard Windows-style title bar with a close button (X) in the top right corner. The main content area displays the following information:

- ADVERTISEMENT SIZE CALCULATED FROM TRANSFERRED FILE IS AS FOLLOWS
- TEXT 142 CHARACTERS
- PRINTING IMAGE 4×6cm
- OVERALL REGION OF ADVERTISEMENT 12×6cm
- SELECT PRINTING SIZE OF ADVERTISEMENT TO BE REGISTERED (S)

Below this text, there is a dropdown menu showing "L SIZE 6cm×12cm" with a downward arrow button. To the right of the dropdown are two radio buttons:

- ☐ PORTRAIT (P)
- ☒ LANDSCAPE (L)

Below the radio buttons, the text "ADJUSTMENT OF ADVERTISEMENT SIZE" is displayed. Underneath this text are two radio buttons, each with a dashed rectangular box around its label:

- ☒ ENLARGE / REDUCE REGISTERED DATA TO FIT ADVERTISEMENT TO PRINTING SIZE (A)
- ☐ PRINT ADVERTISEMENT AT THE CENTER WITHOUT ANY CHANGE IN SIZE OF REGISTERED DATA (R)

At the bottom of the dialog box, there are three buttons arranged horizontally:

- NEXT (E)
- BACK (B)
- CANCEL REGISTRATION (C)

ADVERTISEMENT SIZE CALCULATED FROM TRANSFERRED FILE IS AS FOLLOWS	
TEXT	142 CHARACTERS
PRINTING IMAGE	4×6cm
OVERALL REGION OF ADVERTISEMENT	12×6cm
SELECT PRINTING SIZE OF ADVERTISEMENT TO BE REGISTERED (<u>S</u>)	
<div style="border: 1px solid black; padding: 2px;"> L SIZE (6cm×12cm) </div> <div style="border: 1px solid black; padding: 2px;"> B5 SIZE B6 SIZE <div style="background-color: #cccccc;">L SIZE (6cm×12cm)</div> M SIZE (4cm×8cm) S SIZE (2cm×5cm) POSTCARD SIZE </div>	<input type="radio"/> PORTRAIT (P) <input type="radio"/> LANDSCAPE (L)
<div style="border: 1px dashed black; padding: 5px;"> ADVERTISEMENT TO PRINTING SIZE (A) </div>	
<input type="radio"/> PRINT ADVERTISEMENT AT THE CENTER WITHOUT ANY CHANGE IN SIZE OF REGISTERED DATA (<u>R</u>)	
<div style="border: 1px solid black; padding: 10px; width: 100px; margin: 0 auto;"> NEXT (<u>E</u>) </div>	<div style="border: 1px solid black; padding: 10px; width: 100px; margin: 0 auto;"> BACK (<u>B</u>) </div>
<div style="border: 1px solid black; padding: 10px; width: 200px; margin: 0 auto;"> CANCEL REGISTRATION (<u>C</u>) </div>	

FIG. 66

09547294.04400

×

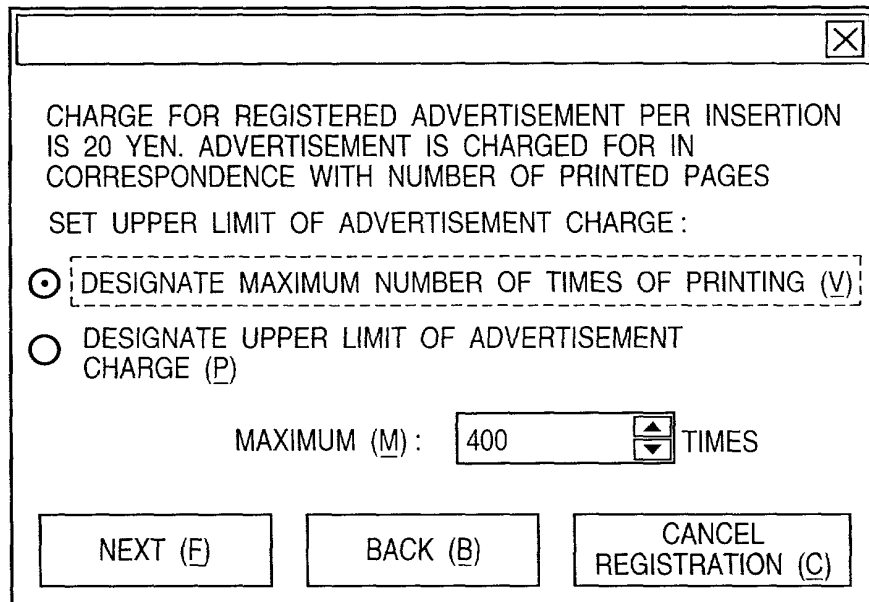
LIMITATION ON ADVERTISEMENT INSERTION POSITION

☐ SINGLE ADVERTISEMENT (U)

☐ ALWAYS TO BE PRINTED AS TOP ADVERTISEMENT (T)

☒ MAY BE PRINTED ON LOWER SURFACE (R)

NEXT (F) BACK (B) CANCEL
REGISTRATION (C)

FIG. 67


A screenshot of a software dialog box titled "REGISTRATION". The dialog box contains the following text and controls:

CHARGE FOR REGISTERED ADVERTISEMENT PER INSERTION
IS 20 YEN. ADVERTISEMENT IS CHARGED FOR IN
CORRESPONDENCE WITH NUMBER OF PRINTED PAGES

SET UPPER LIMIT OF ADVERTISEMENT CHARGE :

☒ DESIGNATE MAXIMUM NUMBER OF TIMES OF PRINTING (V)

☐ DESIGNATE UPPER LIMIT OF ADVERTISEMENT
CHARGE (P)

MAXIMUM (M) : 400  TIMES

At the bottom, there are three buttons: "NEXT (F)", "BACK (B)", and "CANCEL
REGISTRATION (C)".

FIG. 68

PRESS REGISTER BUTTON TO END REGISTRATION

FOLLOWING PROPERTIES ARE REGISTERED

REGISTERED FILE NAME :
Bargain_sale.txt
Bargain_sale.jpg

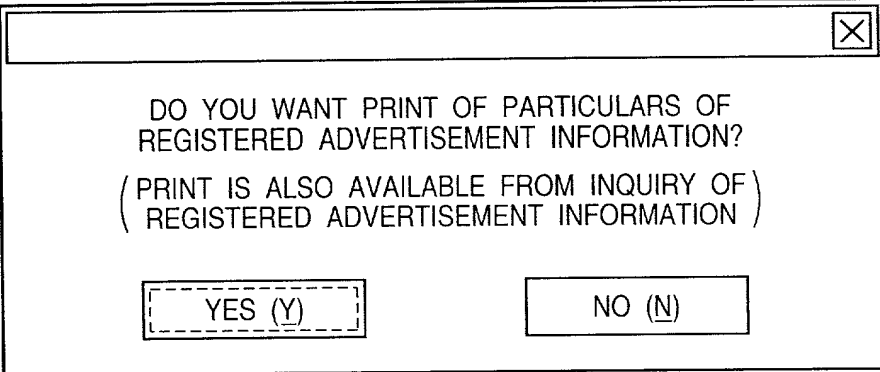
VALID DATES :
FROM MARCH 29, 1999 TO APRIL 10, 1999

LINK RULE TO INFORMATION
REGION
DESIGNATE CITIES, TOWNS, AND VILLAGES,
KITA-KU, KAWASAKI-SHI

KEYWORD
EATING AND DRINKING, RESTAURANT,
CHINESE, DISCOUNT, TASTY

REGISTER (R) BACK (B) CANCEL REGISTRATION (C)

FIG. 69



DO YOU WANT PRINT OF PARTICULARS OF
REGISTERED ADVERTISEMENT INFORMATION?

(PRINT IS ALSO AVAILABLE FROM INQUIRY OF
REGISTERED ADVERTISEMENT INFORMATION)

YES (Y) NO (N)

FIG. 70

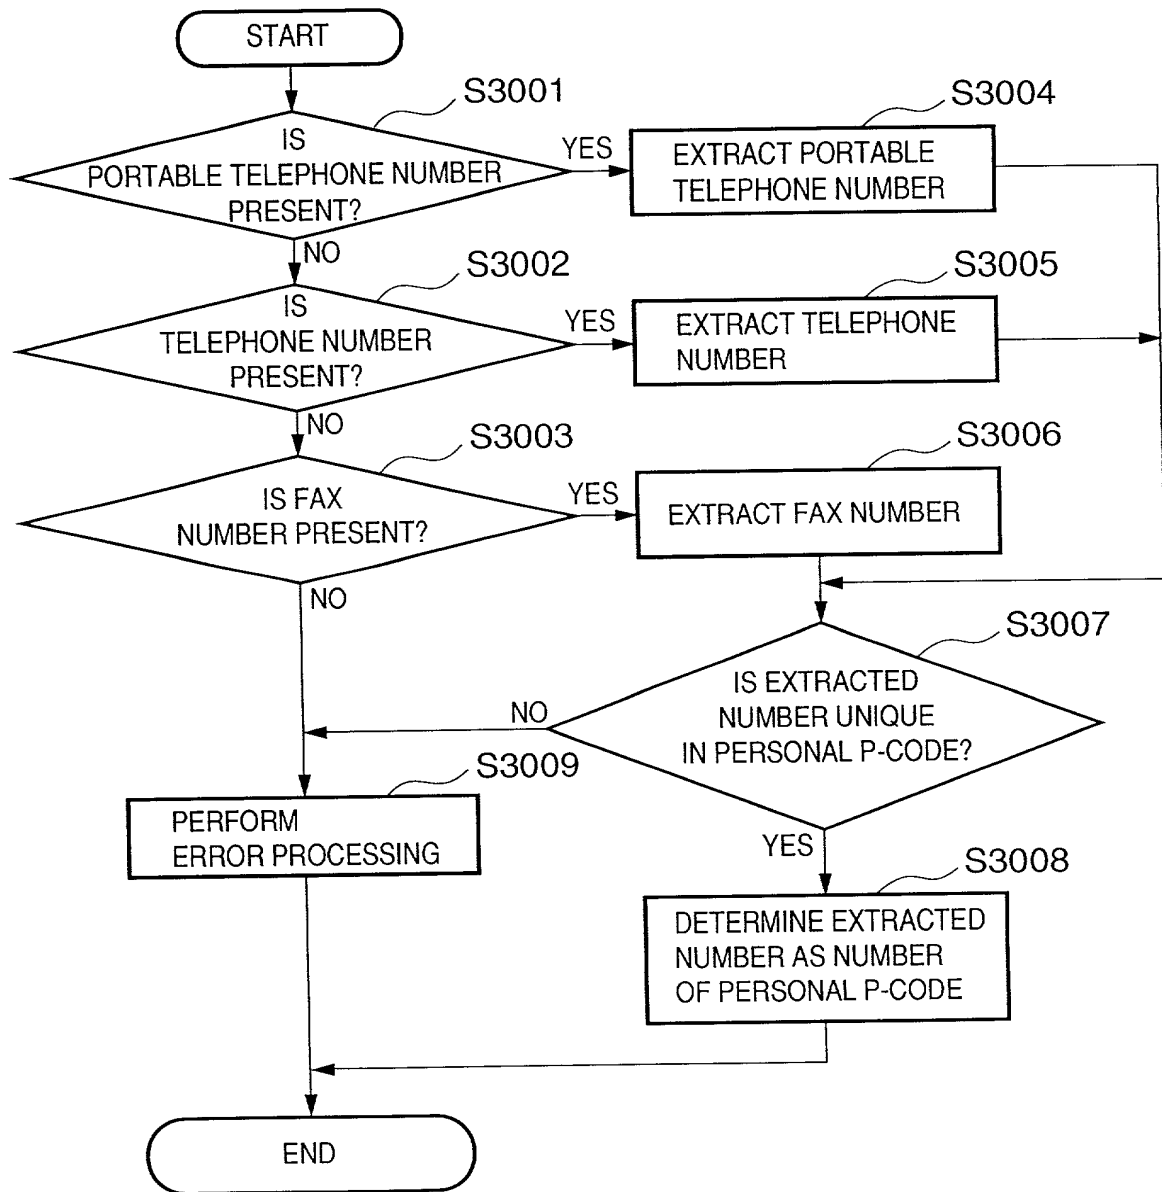


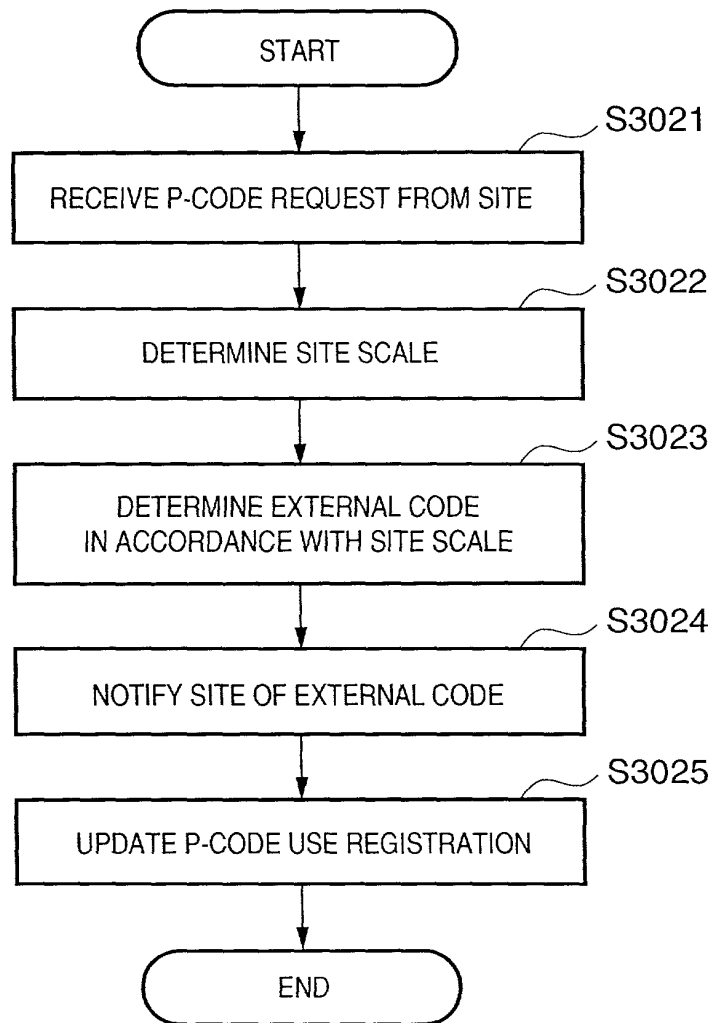
FIG. 71

FIG. 72

SCALE	EXTERNAL CODE	URL
MINIMAL SCALE		
SMALL SCALE		
MEDIUM SCALE		
LARGE SCALE		
MAXIMUM SCALE		

FIG. 73

P-CODE (NUMBER SECTION = EXTERNAL CODE + INTERNAL CODE)	VALID DATES OF CODE

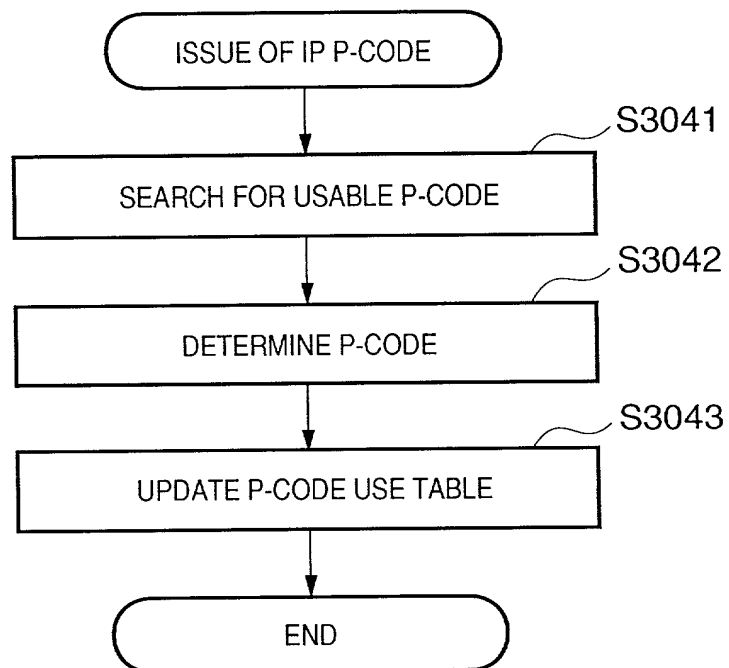
FIG. 74

FIG. 75

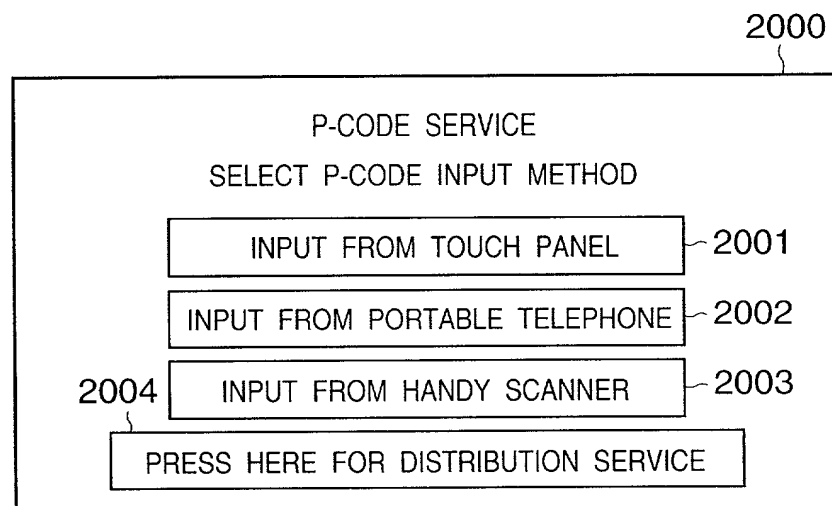


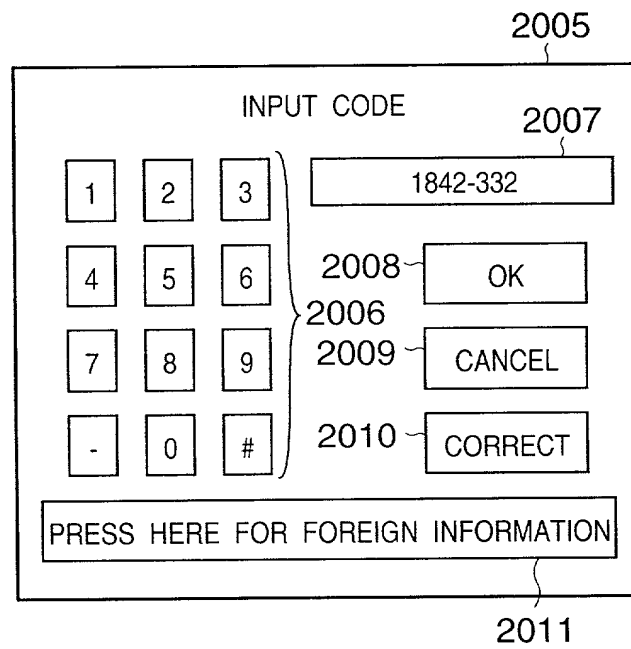
FIG. 76

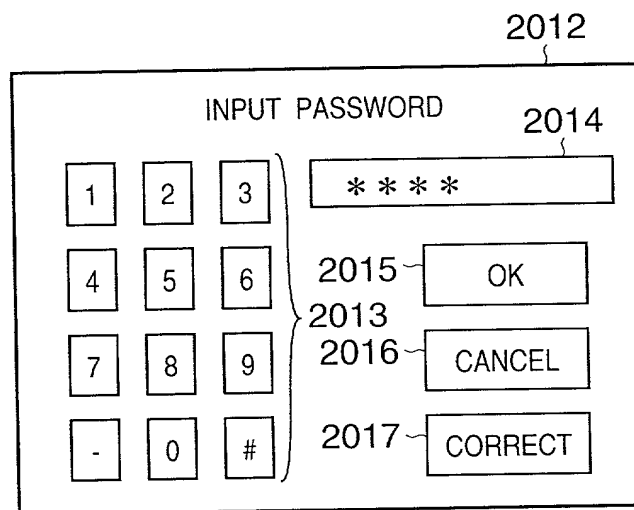
FIG. 77

FIG. 78

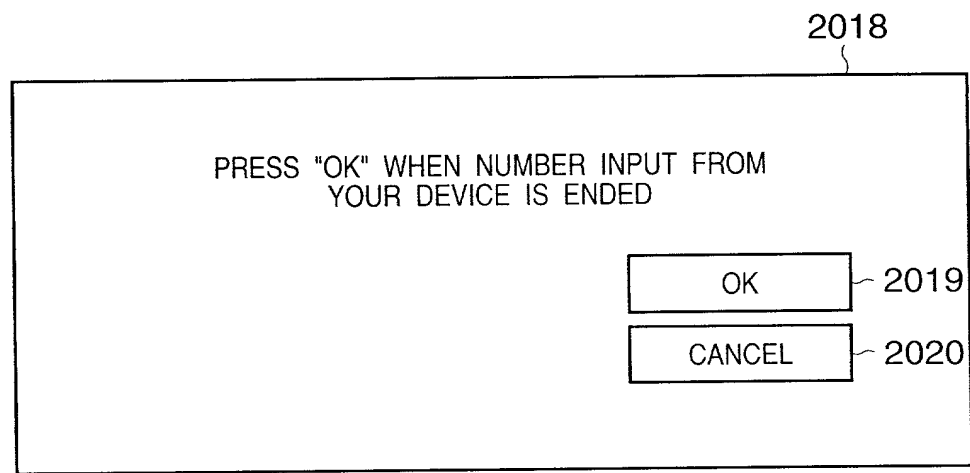


FIG. 79

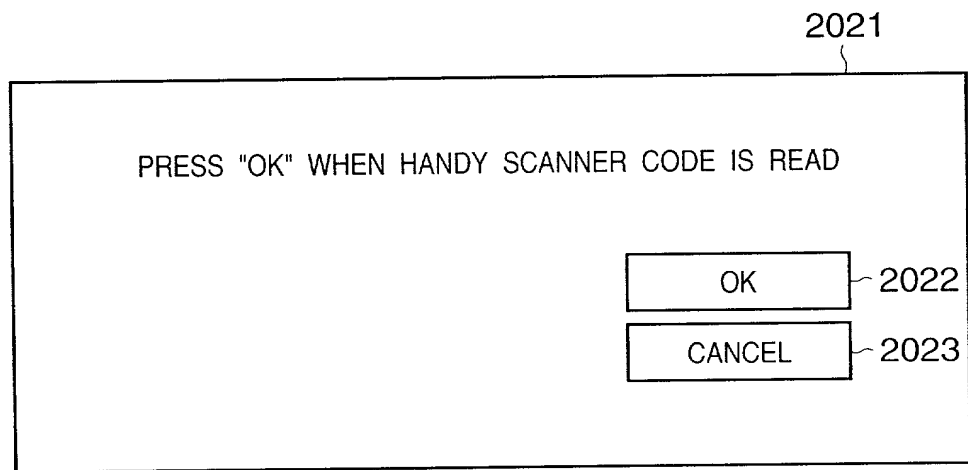


FIG. 80

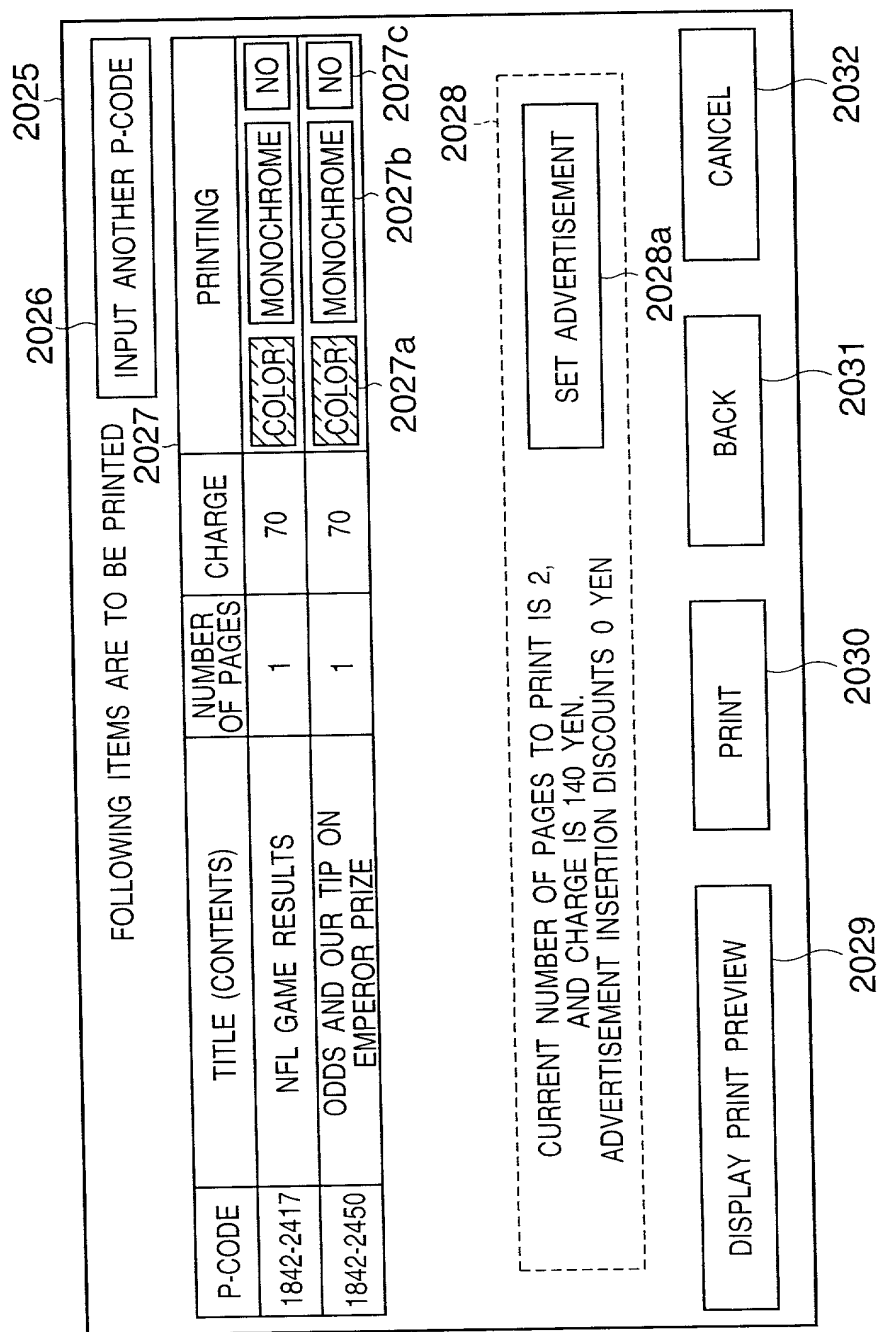


FIG. 81

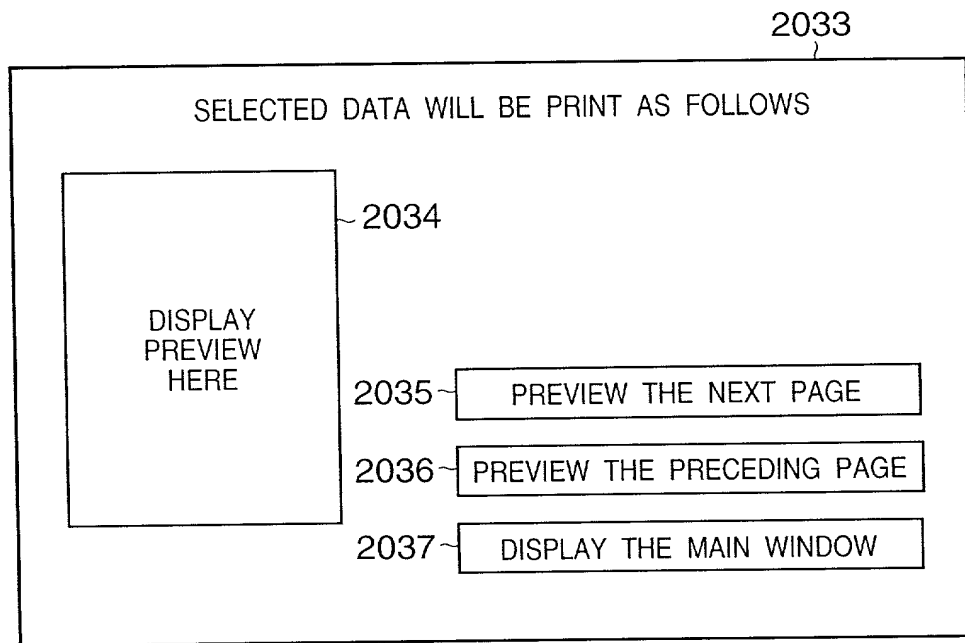


FIG. 82

2038

PRINTING OF ADVERTISEMENT

ADVERTISER BEARS PRINTING CHARGE FOR YOU
WHEN ADVERTISEMENT IS PRINTED

PRINT IN FREE SPACE OF ARTICLE	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	} 2039
PRINT ON LOWER SURFACE	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO	
PRINT ANOTHER PAGE	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	

2040

2041

FIG. 83

2042

MAIL BOX HAS FOLLOWING MAIL MESSAGE

2043

2044

2045

2046

2047

2048

2049

2050

2051

2052

SURFIX	SUBJECT (CONTENTS)	FROM (SENDER)	NUMBER OF PAGES	PRINT
#1	NEW YEAR PARTY	takaha@cse.canon	1	<input checked="" type="checkbox"/> COLOR <input checked="" type="checkbox"/> MONOCHROME <input type="checkbox"/> NO
#2	ABOUT SENDING OF DB EXAMINATION CONFERENCE REPORT	ito@csci.dumnet	2	<input checked="" type="checkbox"/> COLOR <input checked="" type="checkbox"/> MONOCHROME <input type="checkbox"/> NO
#3	Re : DO YOU KNOW?	nishida@ykk.com	1	<input checked="" type="checkbox"/> COLOR <input checked="" type="checkbox"/> MONOCHROME <input checked="" type="checkbox"/> NO

2 MAIL MESSAGES ARE SELECTED. CURRENT NUMBER OF PAGES TO PRINT IS 3.

2046a

2046b

2046c

PRINT ALL

DISPLAY PRECEDING LIST

DISPLAY NEXT LIST

PRINT PREVIEW

SET OPTIONS

PRINT

BACK

CANCEL

FIG. 84

2053

MAIL PRINTING OPTIONS

YOU CAN SELECT FOLLOWING OPTIONS

PRINT MAIL MESSAGES
CONTINUOUSLY ONE SHEET

☐ YES ☒ NO

DENSELY PRINT WITH
SMALLEST LETTERS

☒ YES ☐ NO

2054

2055 2056

2057

2062

FIG. 86

2068

INPUT NUMBER OF FRAME TO BE CHANGED

REGISTER NEW FRAME

2070 {

1	2	3
4	5	6
7	8	9
-	0	#

##2 2071 2069

2072 OK

2073 CANCEL

2074 CORRECT

FIG. 87

2075

REGISTERED FRAME #2 HAS FOLLOWING CONTENTS

2076

2077 2078

2079

2080

2081

2082

2083

2084

2085

2086

2087

2088

2089

2090

2091

2092

2093

2094

2095

2096

2097

2098

2099

2100

2101

2102

2103

2104

2105

2106

2107

2108

2109

2110

2111

2112

2113

2114

2115

2116

2117

2118

2119

2120

2121

2122

2123

2124

2125

2126

2127

2128

2129

2130

2131

2132

2133

2134

2135

2136

2137

2138

2139

2140

2141

2142

2143

2144

2145

2146

2147

2148

2149

2150

2151

2152

2153

2154

2155

2156

2157

2158

2159

2160

2161

2162

2163

2164

2165

2166

2167

2168

2169

2170

2171

2172

2173

2174

2175

2176

2177

2178

2179

2180

2181

2182

2183

2184

2185

2186

2187

2188

2189

2190

2191

2192

2193

2194

2195

2196

2197

2198

2199

2200

2201

2202

2203

2204

2205

2206

2207

2208

2209

2210

2211

2212

2213

2214

2215

2216

2217

2218

2219

2220

2221

2222

2223

2224

2225

2226

2227

2228

2229

2230

2231

2232

2233

2234

2235

2236

2237

2238

2239

2240

2241

2242

2243

2244

2245

2246

2247

2248

2249

2250

2251

2252

2253

2254

2255

2256

2257

2258

2259

2260

2261

2262

2263

2264

2265

2266

2267

2268

2269

2270

2271

2272

2273

2274

2275

2276

2277

2278

2279

2280

2281

2282

2283

2284

2285

2286

2287

2288

2289

2290

2291

2292

2293

2294

2295

2296

2297

2298

2299

2300

2301

2302

2303

2304

2305

2306

2307

2308

2309

2310

2311

2312

2313

2314

2315

2316

2317

2318

2319

2320

2321

2322

2323

2324

2325

2326

2327

2328

2329

2330

2331

2332

2333

2334

2335

2336

2337

2338

2339

2340

2341

2342

2343

2344

2345

2346

2347

2348

2349

2350

2351

2352

2353

2354

2355

2356

2357

2358

2359

2360

2361

2362

2363

2364

2365

2366

2367

2368

2369

2370

2371

2372

2373

2374

2375

2376

2377

2378

2379

2380

2381

2382

2383

2384

2385

2386

2387

2388

2389

2390

2391

2392

2393

2394

2395

2396

2397

2398

2399

2400

2401

2402

2403

2404

2405

2406

2407

2408

2409

2410

2411

2412

2413

2414

2415

2416

2417

2418

2419

2420

2421

2422

2423

2424

2425

2426

2427

2428

2429

2430

2431

2432

2433

2434

2435

2436

2437

2438

2439

2440

2441

2442

2443

2444

2445

2446

2447

2448

2449

2450

2451

2452

2453

2454

2455

2456

2457

2458

2459

2460

2461

2462

2463

2464

2465

2466

2467

2468

2469

2470

2471

2472

2473

2474

2475

2476

2477

2478

2479

2480

2481

2482

2483

2484

2485

2486

2487

2488

2489

2490

2491

2492

2493

2494

2495

2496

2497

2498

2499

2500

2501

2502

2503

2504

2505

2506

2507

2508

2509

2510

2511

2512

2513

2514

2515

2516

2517

2518

2519

2520

2521

2522

2523

2524

2525

2526

2527

2528

2529

2530

2531

2532

2533

2534

2535

2536

2537

2538

2539

2540

2541

2542

2543

2544

2545

2546

2547

2548

2549

2550

2551

2552

2553

2554

2555

2556

2557

2558

2559

2560

2561

2562

2563

2564

2565

2566

2567

2568

2569

2570

2571

2572

2573

2574

2575

2576

2577

2578

2579

2580

2581

2582

2583

2584

2585

2586

2587

2588

2589

2590

2591

2592

2593

2594

2595

2596

2597

2598

2599

2600

2601

2602

2603

2604

2605

2606

2607

2608

2609

2610

2611

2612

2613

2614

2615

2616

2617

2618

2619

2620

2621

2622

2623

2624

2625

2626

2627

2628

2629

2630

2631

2632

2633

2634

2635

2636

2637

2638

2639

2640

2641

2642

2643

2644

2645

2646

2647

2648

2649

2650

2651

2652

2653

2654

2655

2656

2657

2658

2659

2660

2661

2662

2663

2664

2665

2666

2667

2668

2669

2670

2671

2672

2673

2674

2675

2676

2677

2678

2679

2680

2681

2682

2683

2684

2685

2686

2687

2688

2689

2690

2691

2692

2693

2694

2695

2696

2697

2698

2699

2700

2701

2702

2703

2704

2705

2706

2707

2708

2709

2710

2711

2712

2713

2714

2715

2716

2717

2718

2719

2720

2721

2722

2723

2724

2725

2726

2727

2728

2729

2730

2731

2732

2733

2734

2735

2736

2737

2738

2739

2740

2741

2742

2743

2744

2745

2746

2747

2748

2749

2750

2751

2752

2753

2754

2755

2756

2757

2758

2759

2760

2761

2762

2763

2764

2765

2766

2767

2768

2769

2770

2771

2772

2773

2774

2775

2776

2777

2778

2779

2780

2781

2782

2783

2784

2785

2786

2787

2788

2789

2790

2791

2792

2793

2794

2795

2796

2797

2798

2799

2800

2801

2802

2803

2804

2805

2806

2807

2808

2809

2810

2811

2812

2813

2814

2815

2816

2817

2818

2819

2820

2821

2822

2823

2824

2825

2826

2827

2828

2829

2830

2831

2832

2833

2834

2835

2836

2837

2838

2839

2840

2841

2842

2843

2844

2845

2846

2847

2848

2849

2850

2851

2852

2853

2854

2855

2856

2857

2858

2859

2860

2861

2862

2863

2864

2865

2866

2867

2868

2869

2870

2871

2872

2873

2874

2875

2876

2877

2878

2879

2880

2881

2882

2883

2884

2885

2886

2887

2888

2889

2890

2891

2892

2893

2894

2895

2896

2897

2898

2899

2900

2901

2902

2903

2904

2905

2906

2907

2908

2909

2910

2911

2912

2913

2914

2915

2916

2917

2918

2919

2920

2921

2922

2923

2924

2925

2926

2927

2928

2929

2930

2931

2932

2933

2934

2935

2936

2937

2938

2939

2940

2941

2942

2943

2944

2945

2946

2947

2948

2949

2950

2951

2952

2953

2954

2955

2956

2957

2958

2959

2960

2961

2962

2963

2964

2965

2966

2967

2968

2969

2970

2971

2972

2973

2974

2975

2976

2977

2978

2979

2980

2981

2982

2983

2984

2985

2986

2987

2988

2989

2990

2991

2992

2993

2994

2995

2996

2997

2998

2999

3000

3001

3002

3003

3004

3005

3006

3007

3008

3009

3010

3011

3012

3013

3014

3015

3016

3017

3018

3019

3020

3021

3022

3023

3024

3025

3026

3027

3028

3029

3030

3031

3032

3033

3034

3035

3036

3037

3038

3039

3040

3041

3042

3043

3044

3045

3046

3047

3048

3049

3050

3051

3052

3053

3054

3055

3056

3057

3058

3059

3060

3061

3062

3063

3064

3065

3066

3067

3068

3069

3070

3071

3072

3073

3074

3075

3076

3077

3078

3079

3080

3081

3082

3083

3084

3085

3086

3087

3088

3089

3090

3091

3092

3093

3094

3095

3096

3097

3098

3099

3100

3101

3102

3103

3104

3105

3106

3107

3108

3109

3110

3111

3112

3113

3114

3115

3116

3117

3118

3119

3120

3121

3122

3123

3124

3125

3126

3127

3128

3129

3130

3131

3132

3133

3134

3135

3136

3137

3138

3139

3140

3141

3142

3143

3144

3145

3146

3147

3148

3149

3150

3151

3152

3153

3154

3155

3156

3157

3158

3159

3160

3161

3162

3163

3164

3165

3166

3167

3168

3169

3170

3171

3172

3173

3174

3175

3176

3177

3178

3179

3180

3181

3182

3183

3184

3185

3186

3187

3188

3189

3190

3191

3192

3193

3194

3195

3196

3197

3198

3199

3200

3201

3202

3203

3204

3205

3206

3207

3208

3209

3210

3211

3212

3213

3214

3215

3216

3217

3218

3219

3220

3221

3222

3223

3224

3225

3226

3227

3228

3229

3230

3231

3232

3233

3234

3235

3236

3237

3238

3239

3240

3241

3242

3243

3244

3245

3246

3247

3248

3249

3250

3251

3252

3253

3254

3255

3256

3257

3258

3259

3260

3261

3262

3263

3264

3265

3266

3267

3268

3269

3270

3271

3272

3273

3274

3275

3276

3277

3278

3279

3280

3281

3282

3283

3284

3285

3286

3287

3288

3289

3290

3291

3292

3293

3294

3295

3296

3297

3298

3299

3300

3301

3302

3303

3304

3305

3306

3307

3308

3309

3310

3311

3312

3313

3314

3315

3316

3317

3318

3319

3320

3321

3322

3323

3324

3325

3326

3327

3328

3329

3330

3331

3332

3333

3334

3335

3336

3337

3338

3339

3340

3341

3342

3343

3344

3345

3346

3347

3348

3349

3350

3351

3352

3353

3354

3355

3356

3357

3358

3359

3360

3361

3362

3363

3364

3365

3366

3367

3368

3369

3370

3371

3372

3373

3374

3375

3376

3377

3378

3379

3380

3381

3382

3383

3384

3385

3386

3387

3388

3389

3390

3391

3392

3393

3394

3395

3396

3397

3398

3399

3400

3401

3402

3403

3404

3405

3406

3407

3408

3409

3410

3411

3412

3413

3414

3415

3416

3417

3418

3419

3420

3421

3422

3423

3424

3425

3426

3427

3428

3429

3430

3431

3432

343

FIG. 88

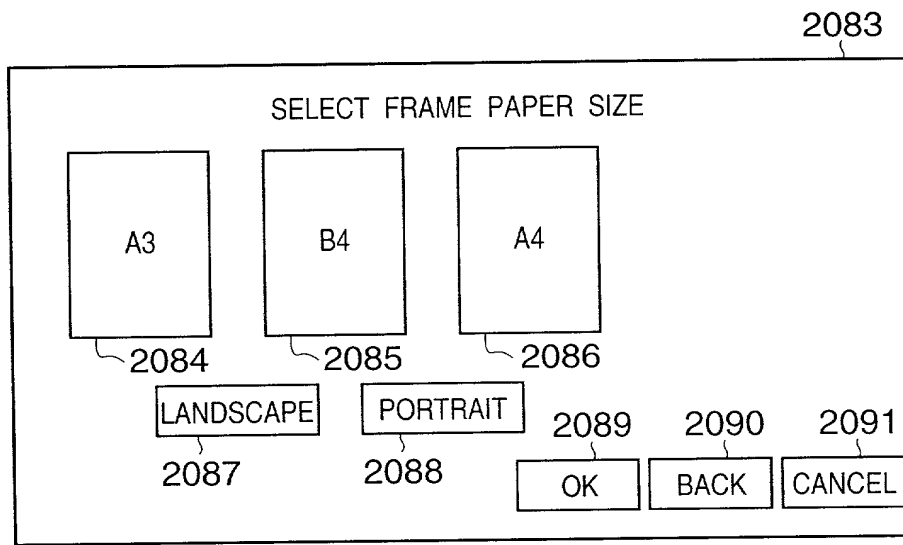


FIG. 89

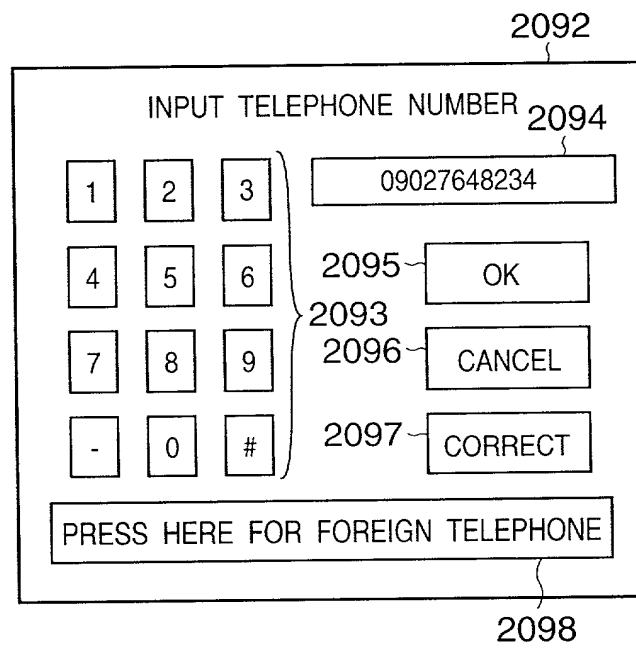


FIG. 90

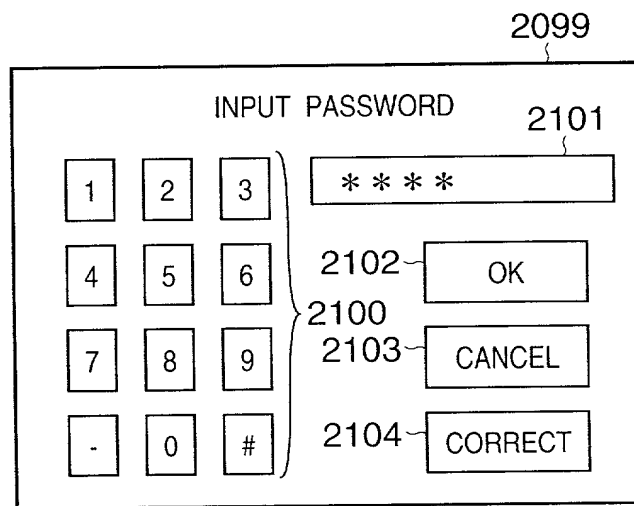


FIG. 91

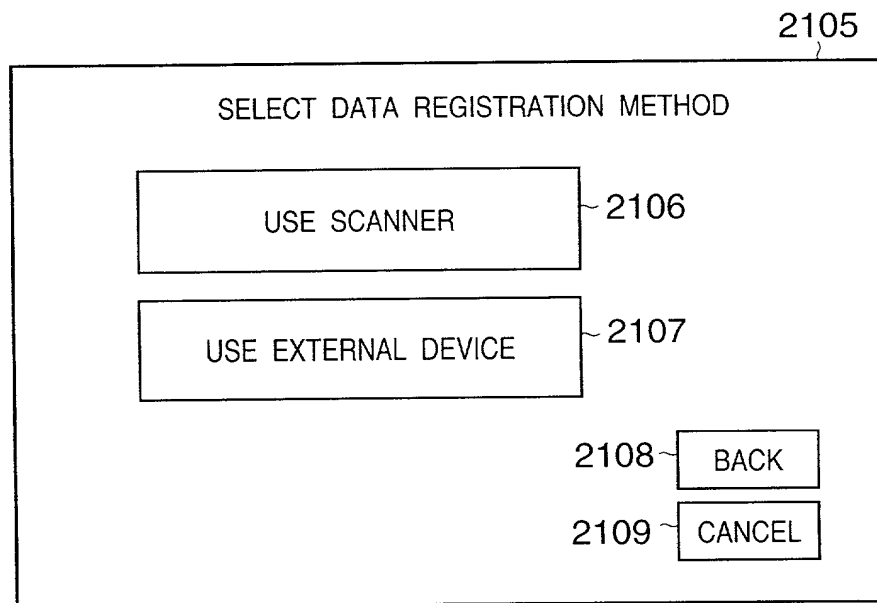


FIG. 92

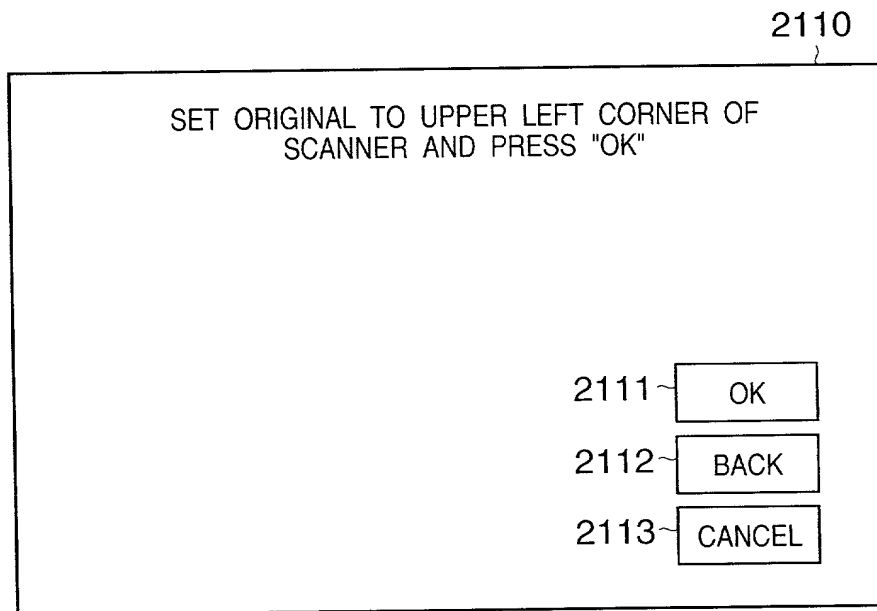


FIG. 93

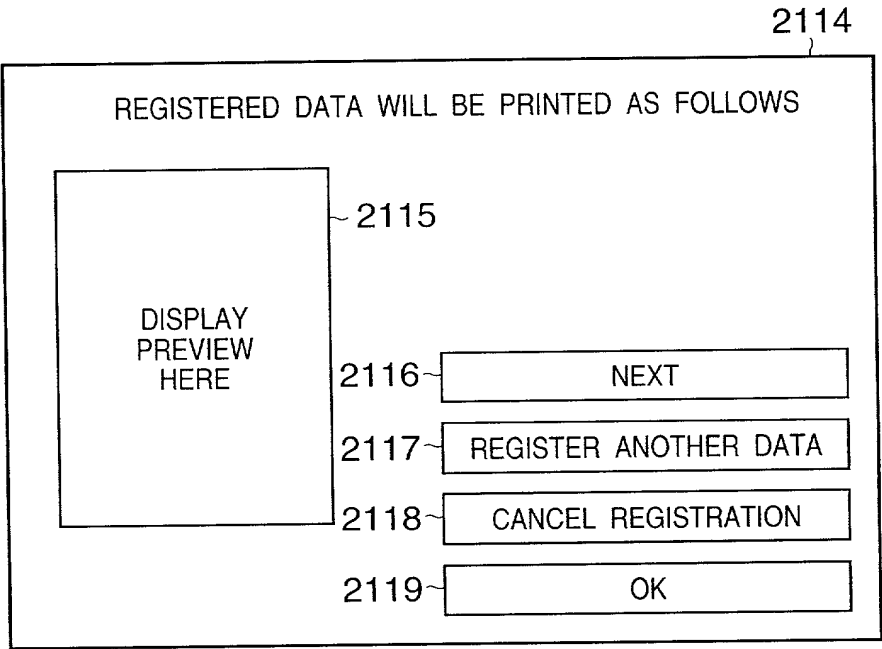


FIG. 94

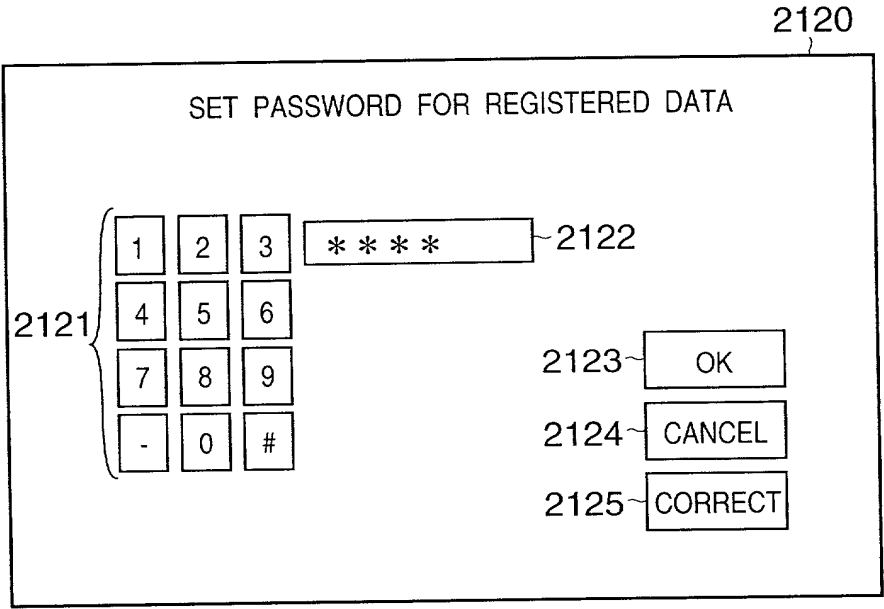


FIG. 95

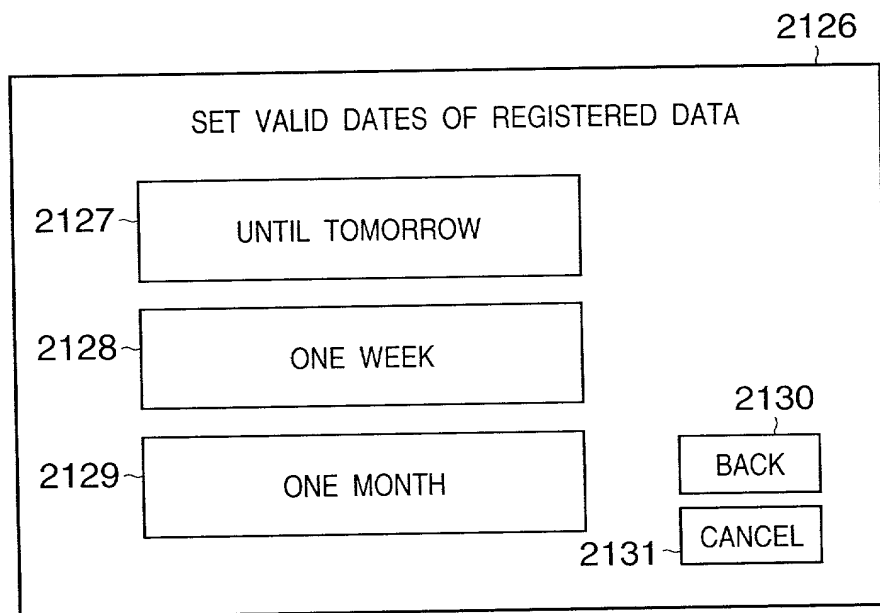


FIG. 96

2132

FOLLOWING DATA IS RECEIVED.
PRESS "OK" TO PRINT PARTICULARS

2133

REGISTERED P-CODE	09027648234-4
DATA PASSWORD	* * * *
REGISTERED DATA	IMAGE 480 KBytes
VALID DATES	ONE WEEK (UNTIL APRIL 10)

2134 2135 2136

OK CANCEL

FIG. 97

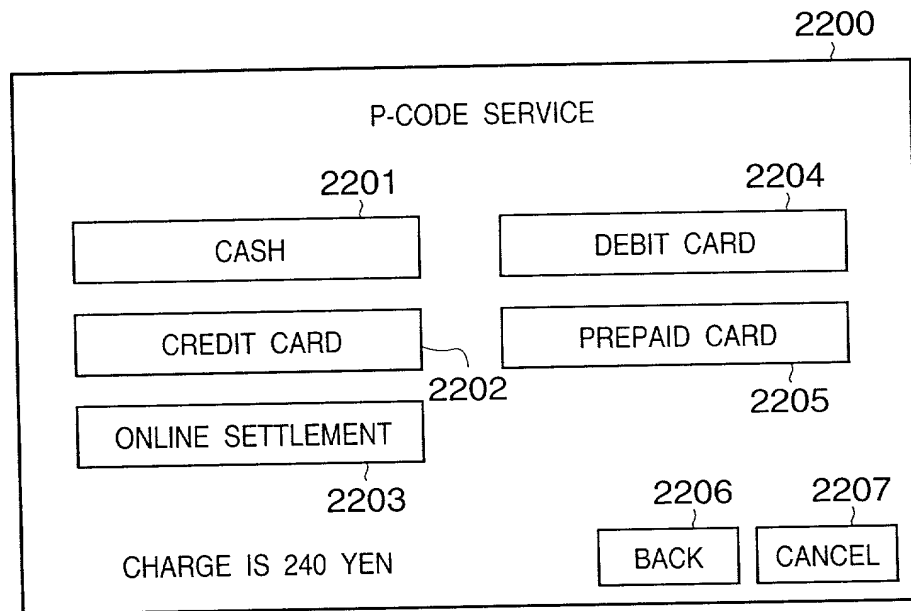


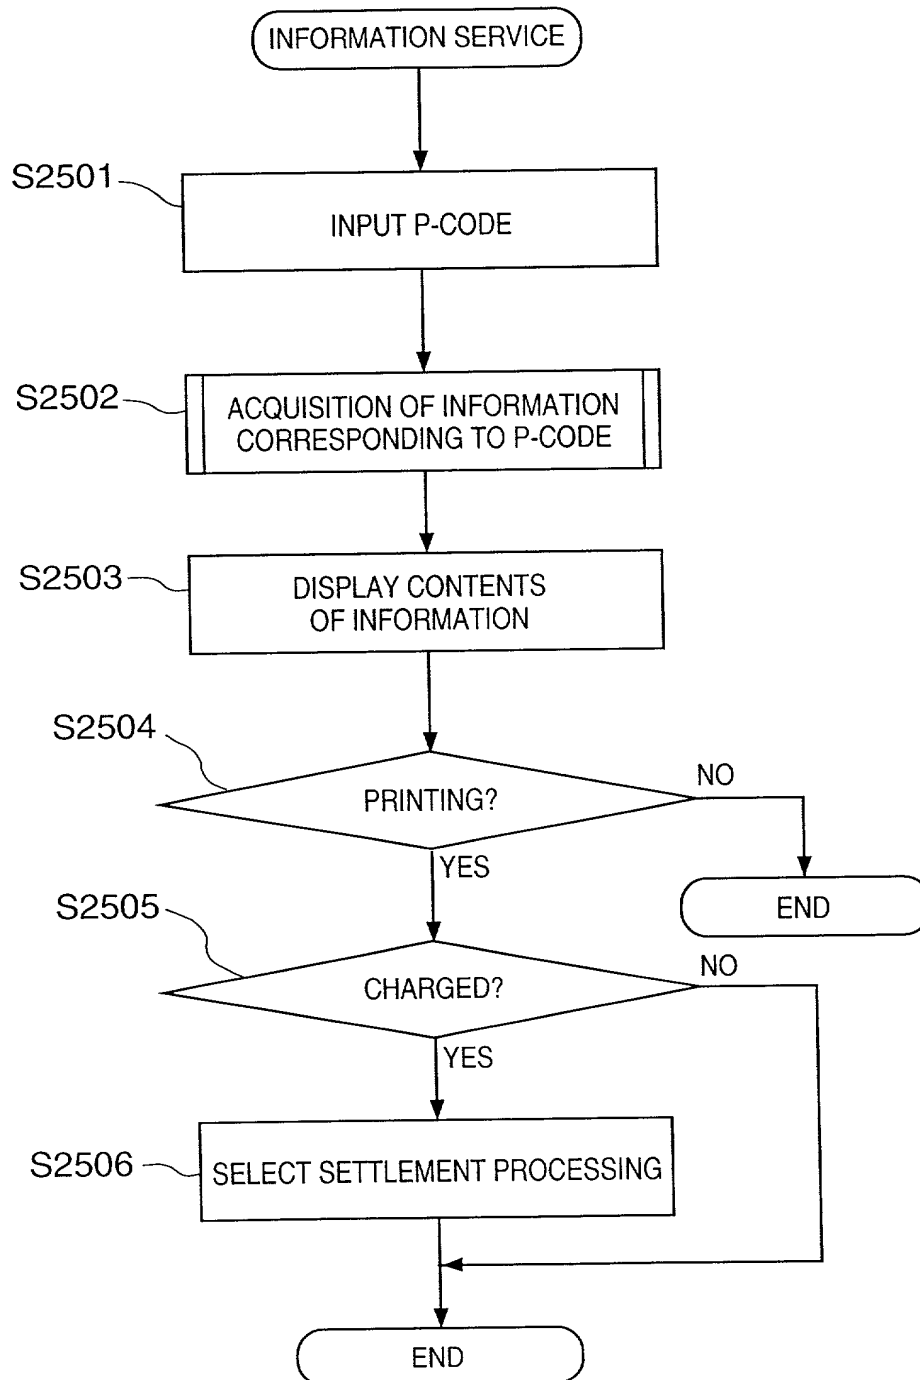
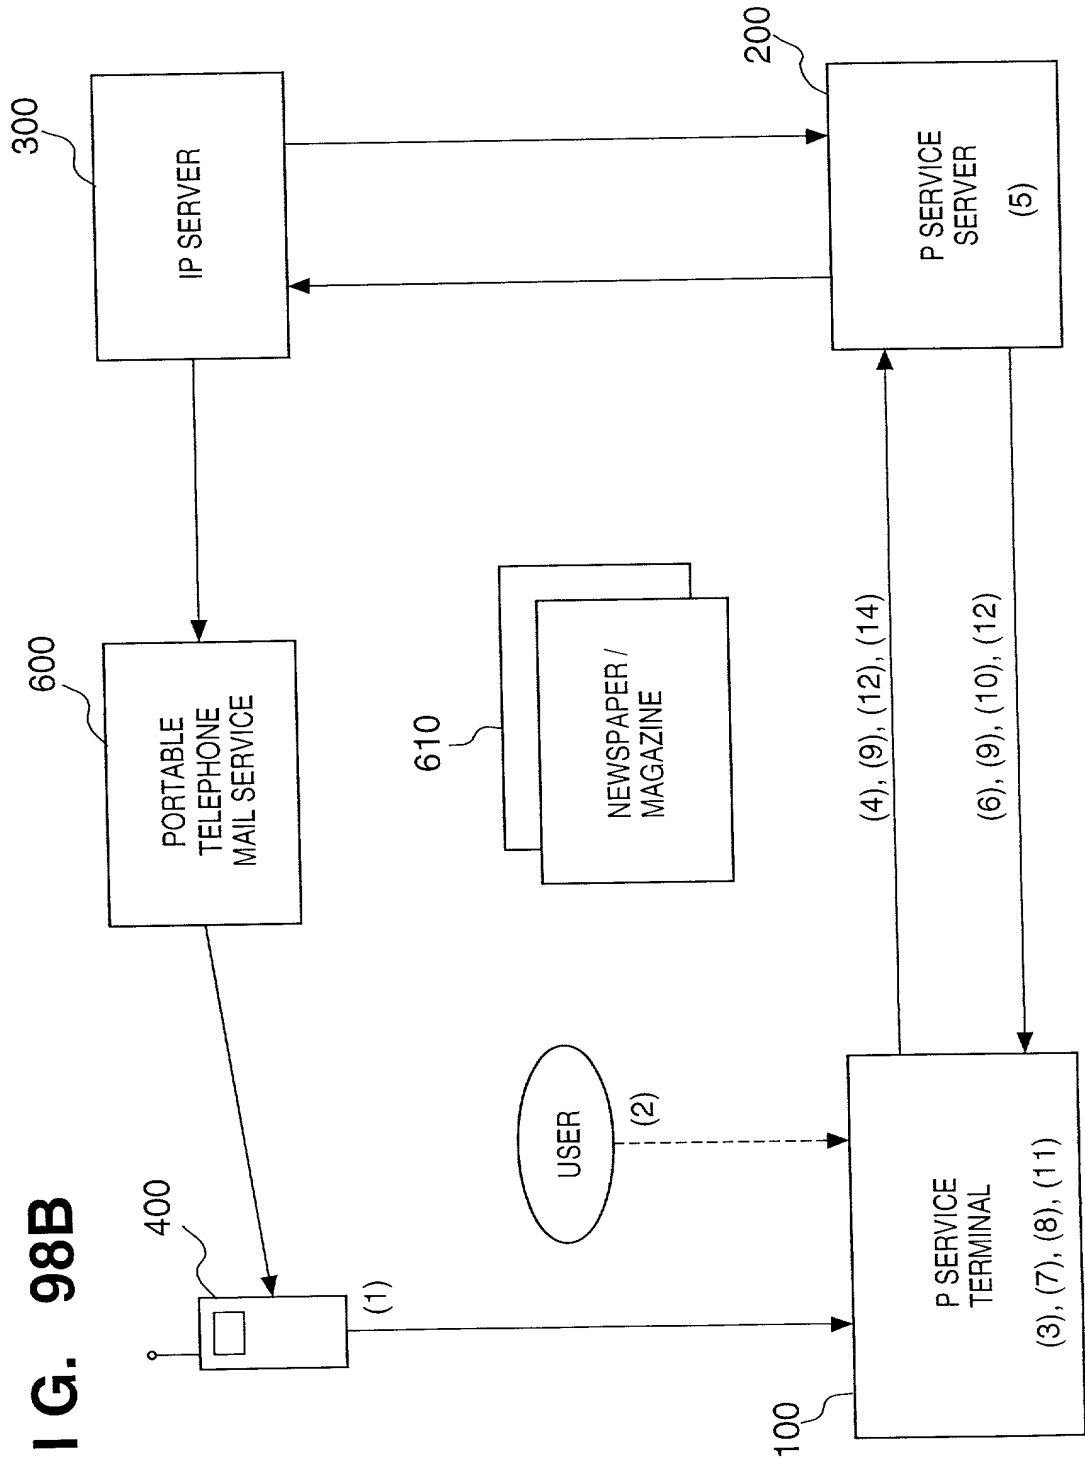
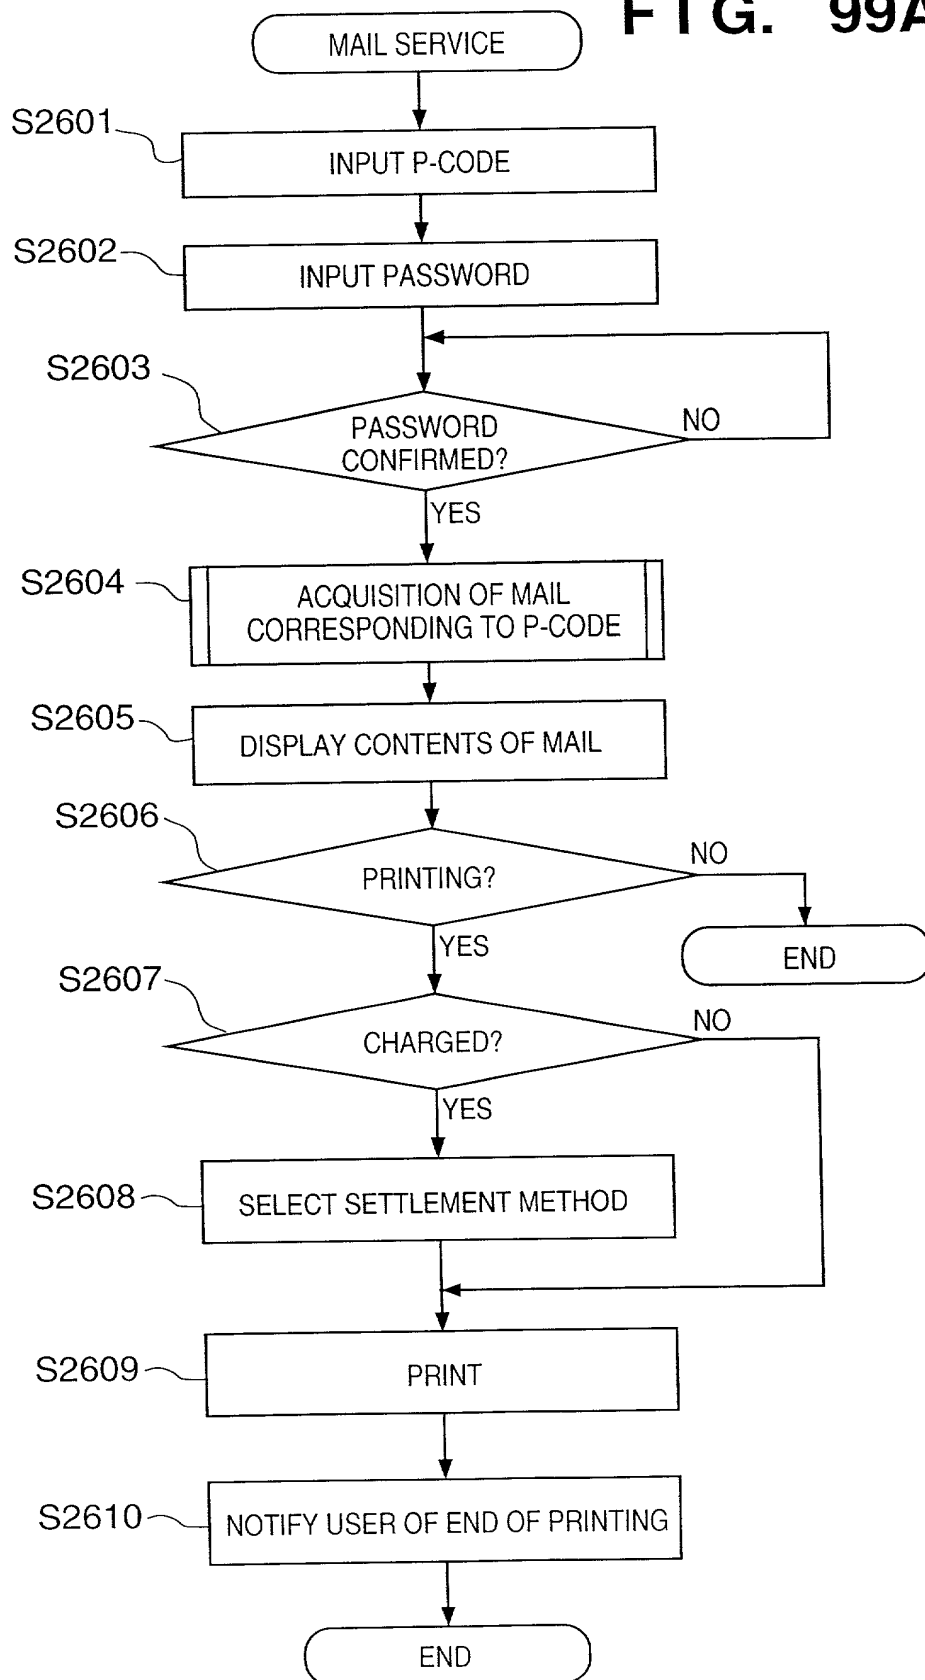
FIG. 98A

FIG. 98B





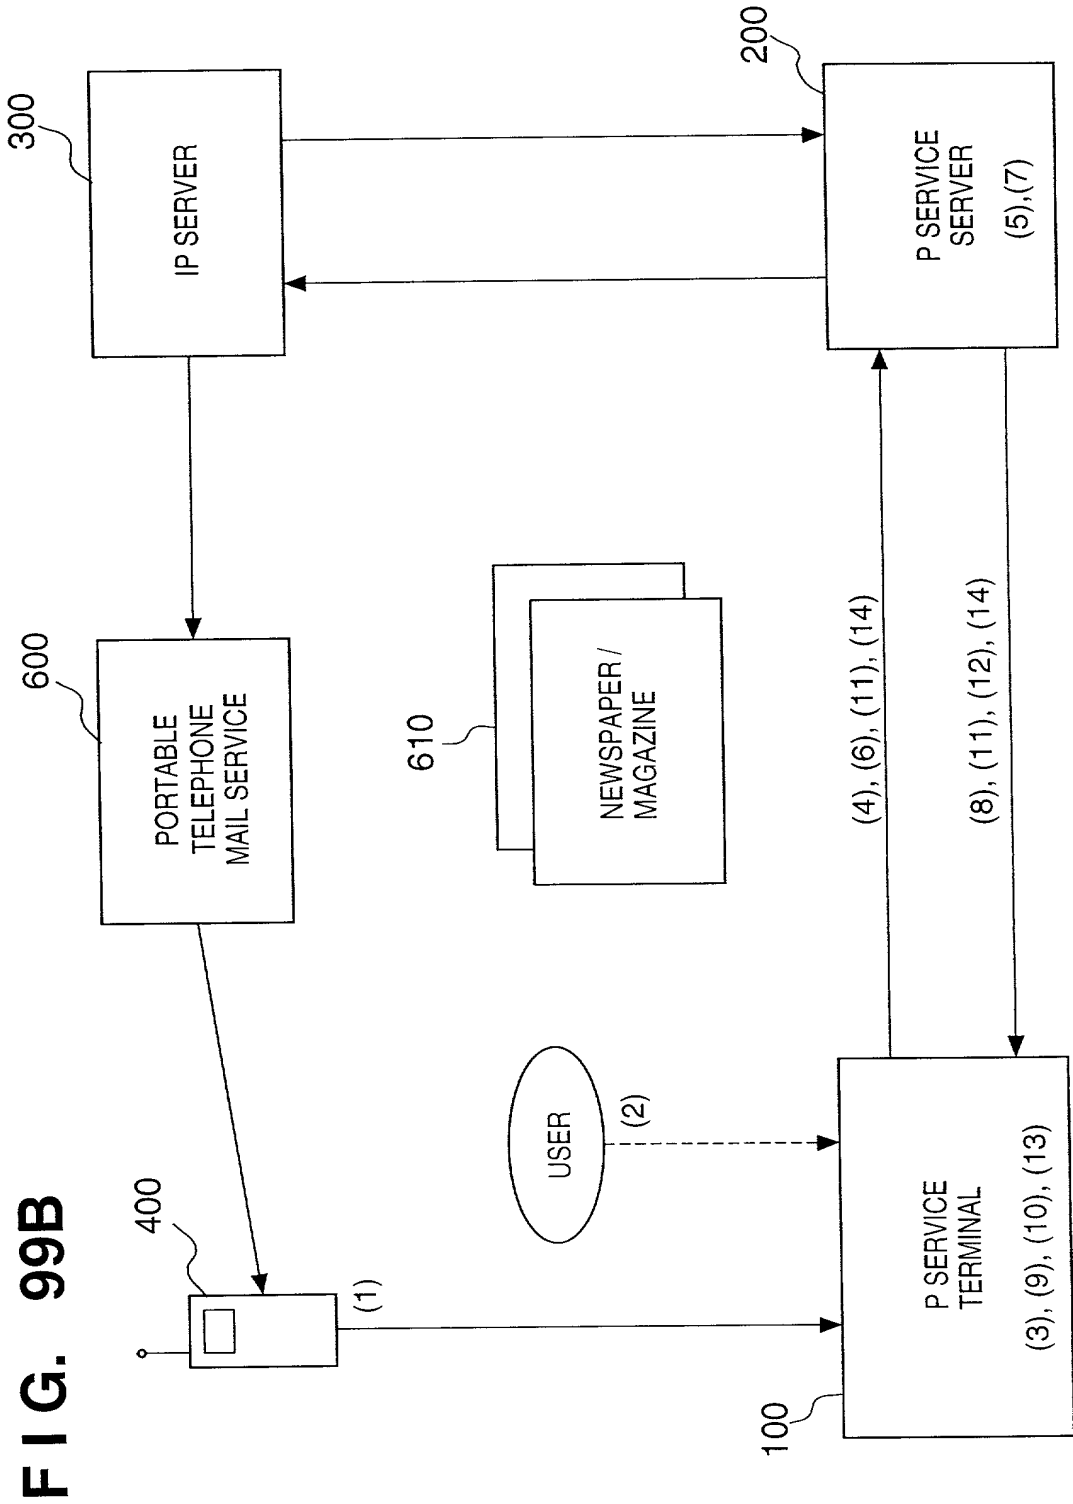
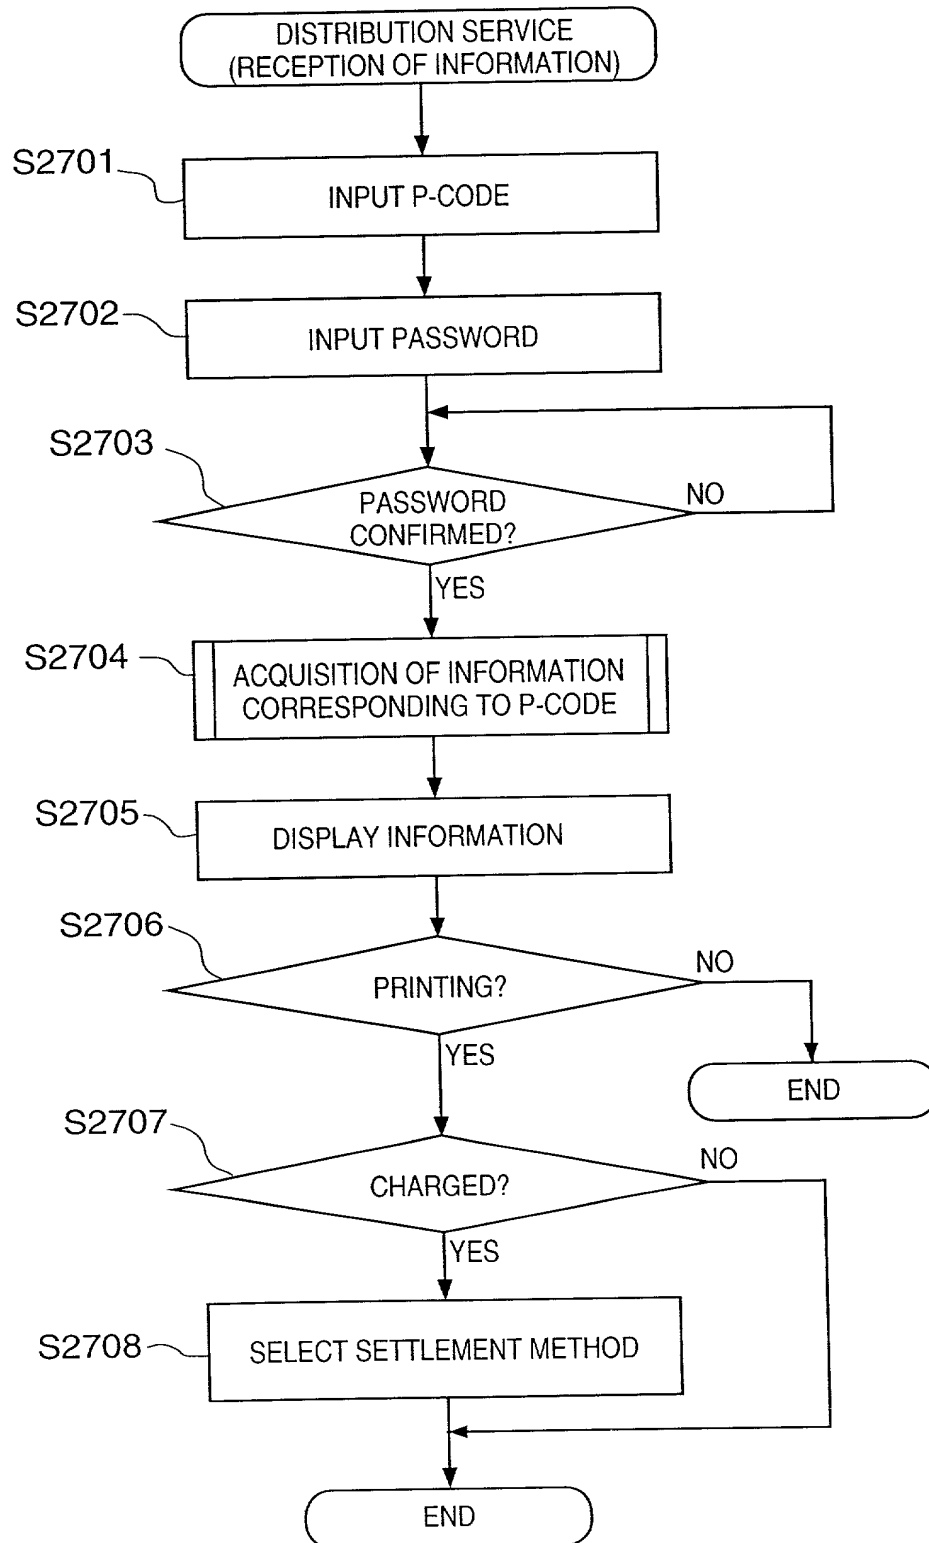


FIG. 100A

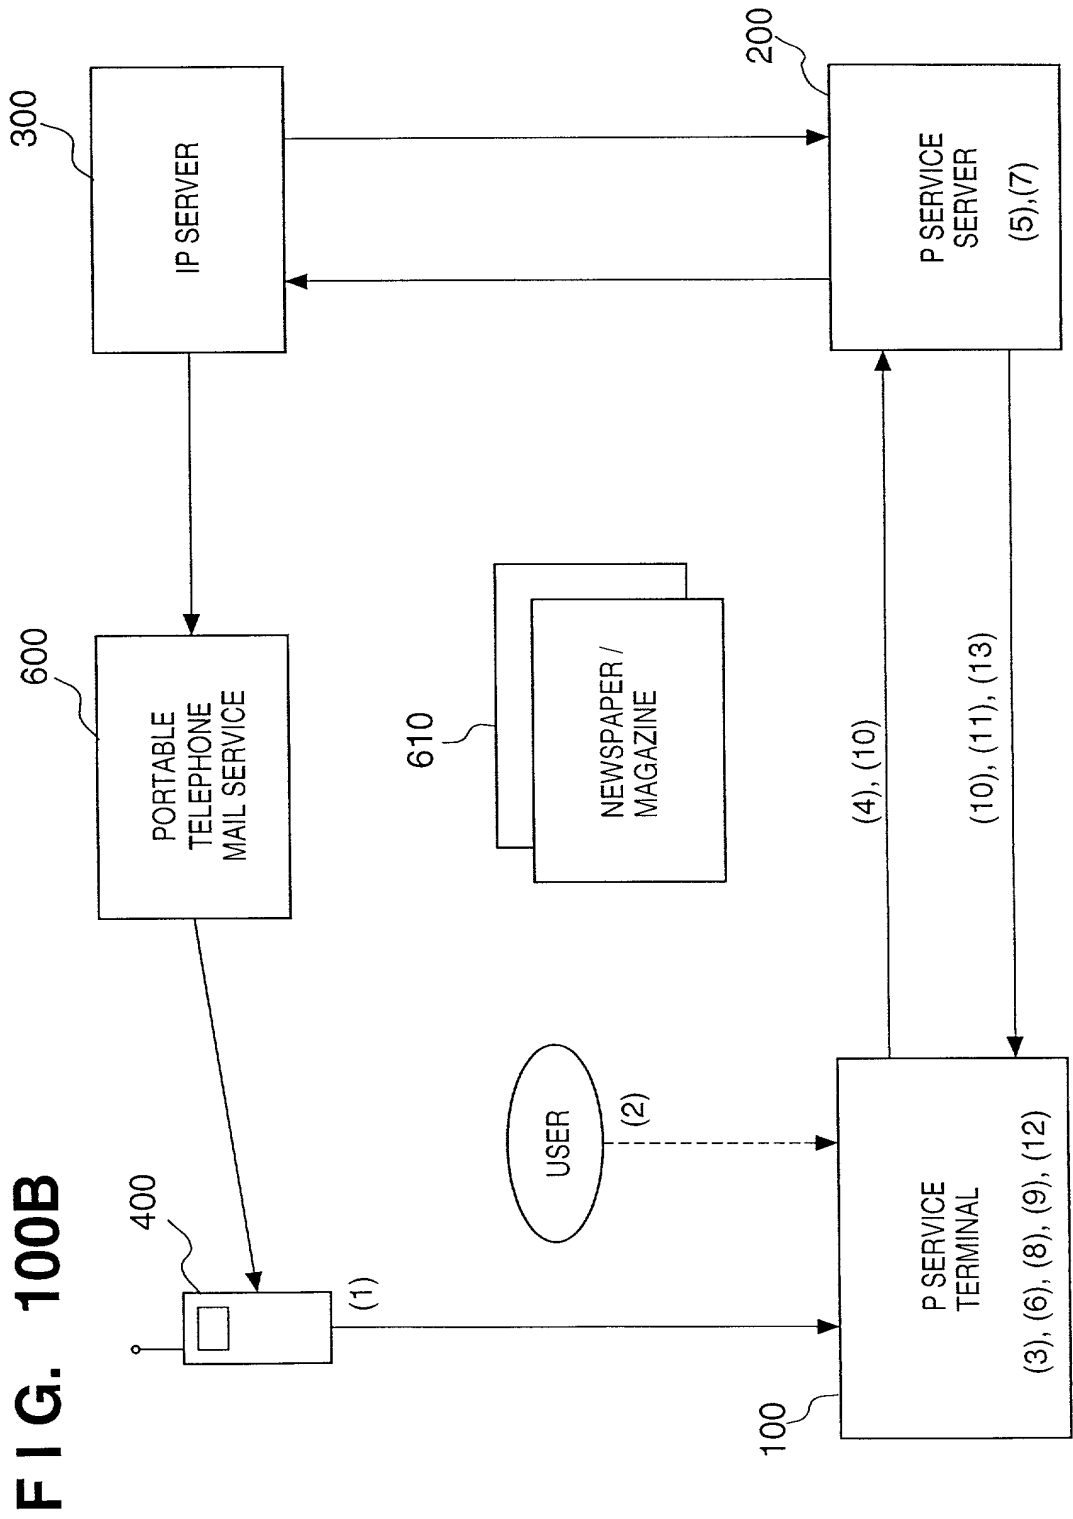
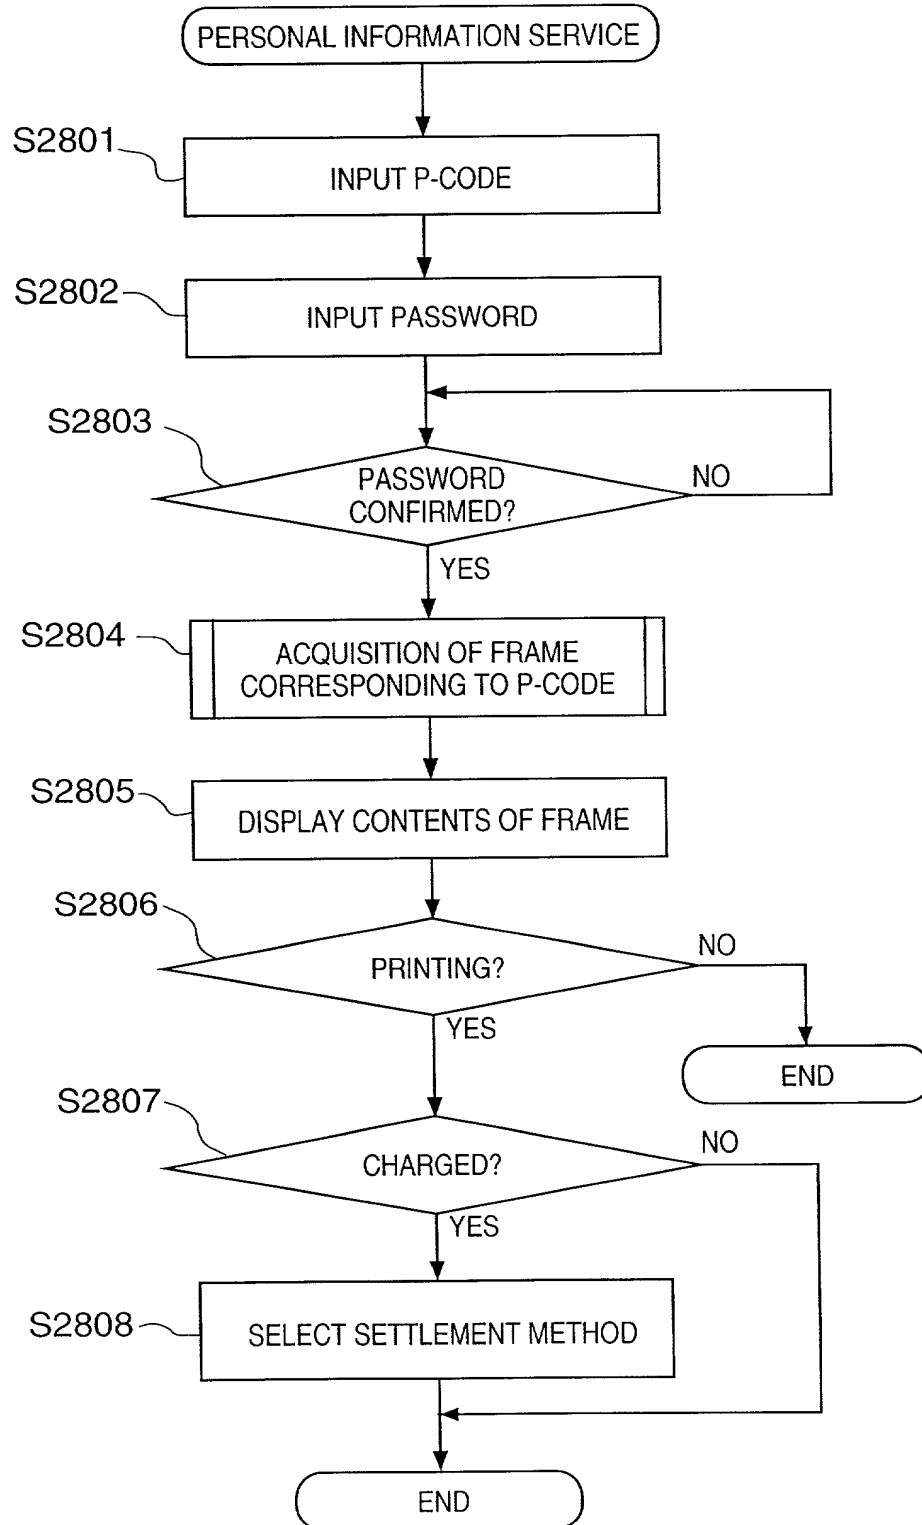
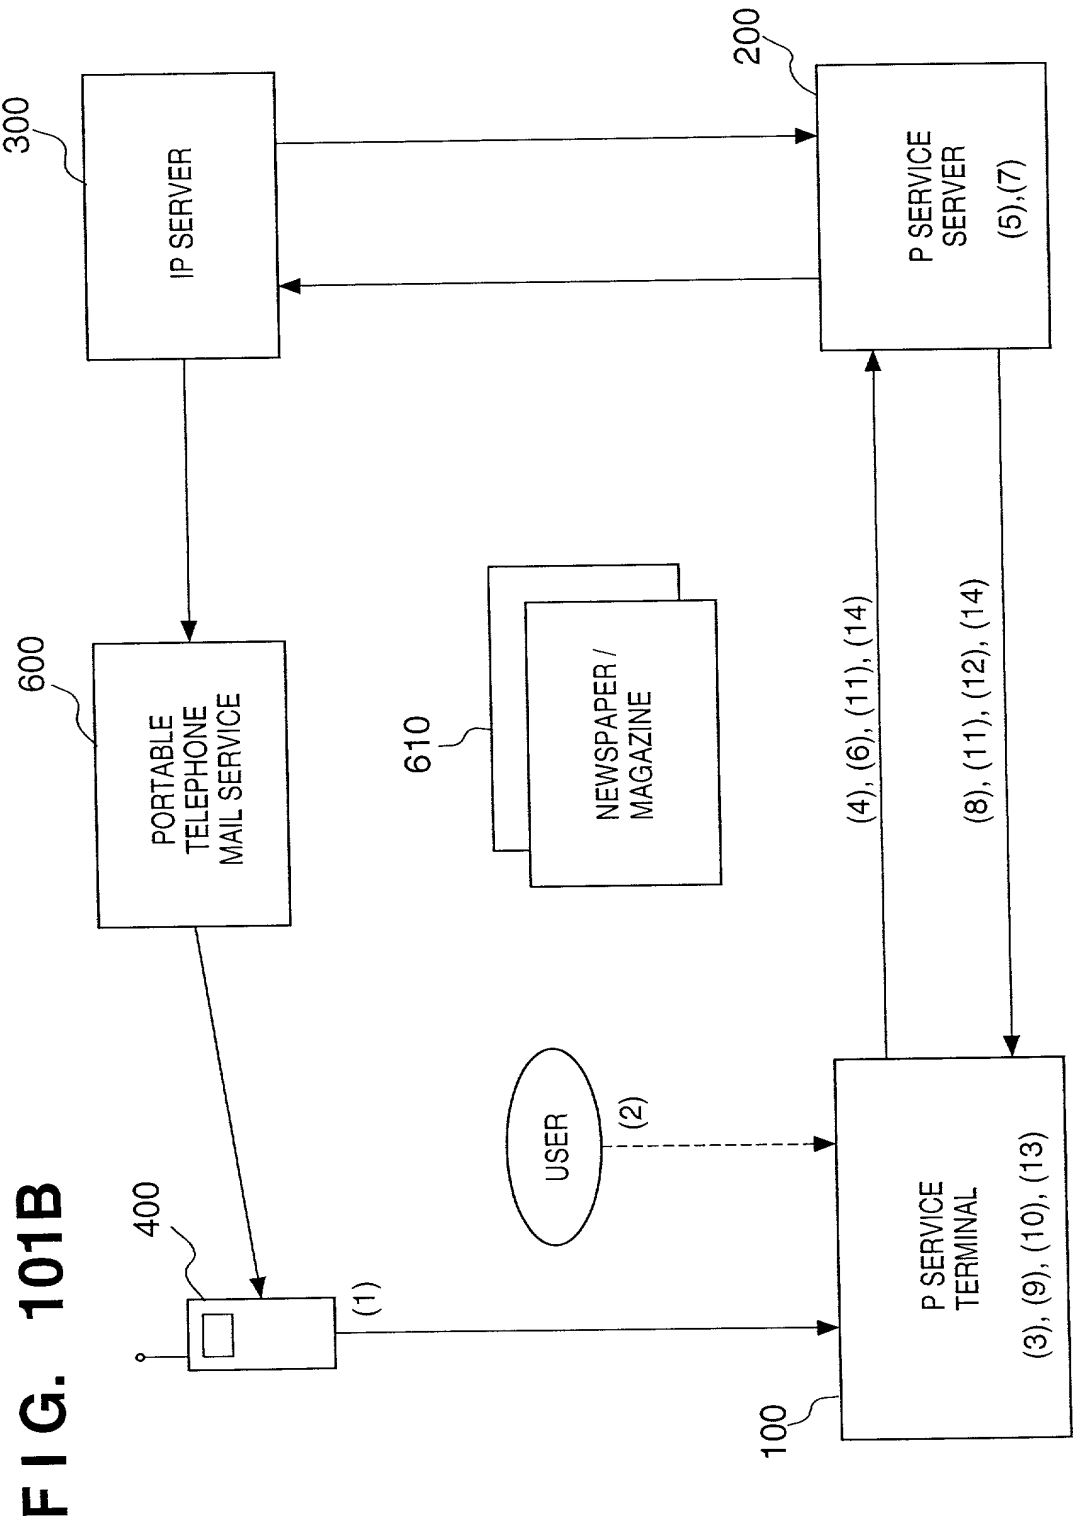
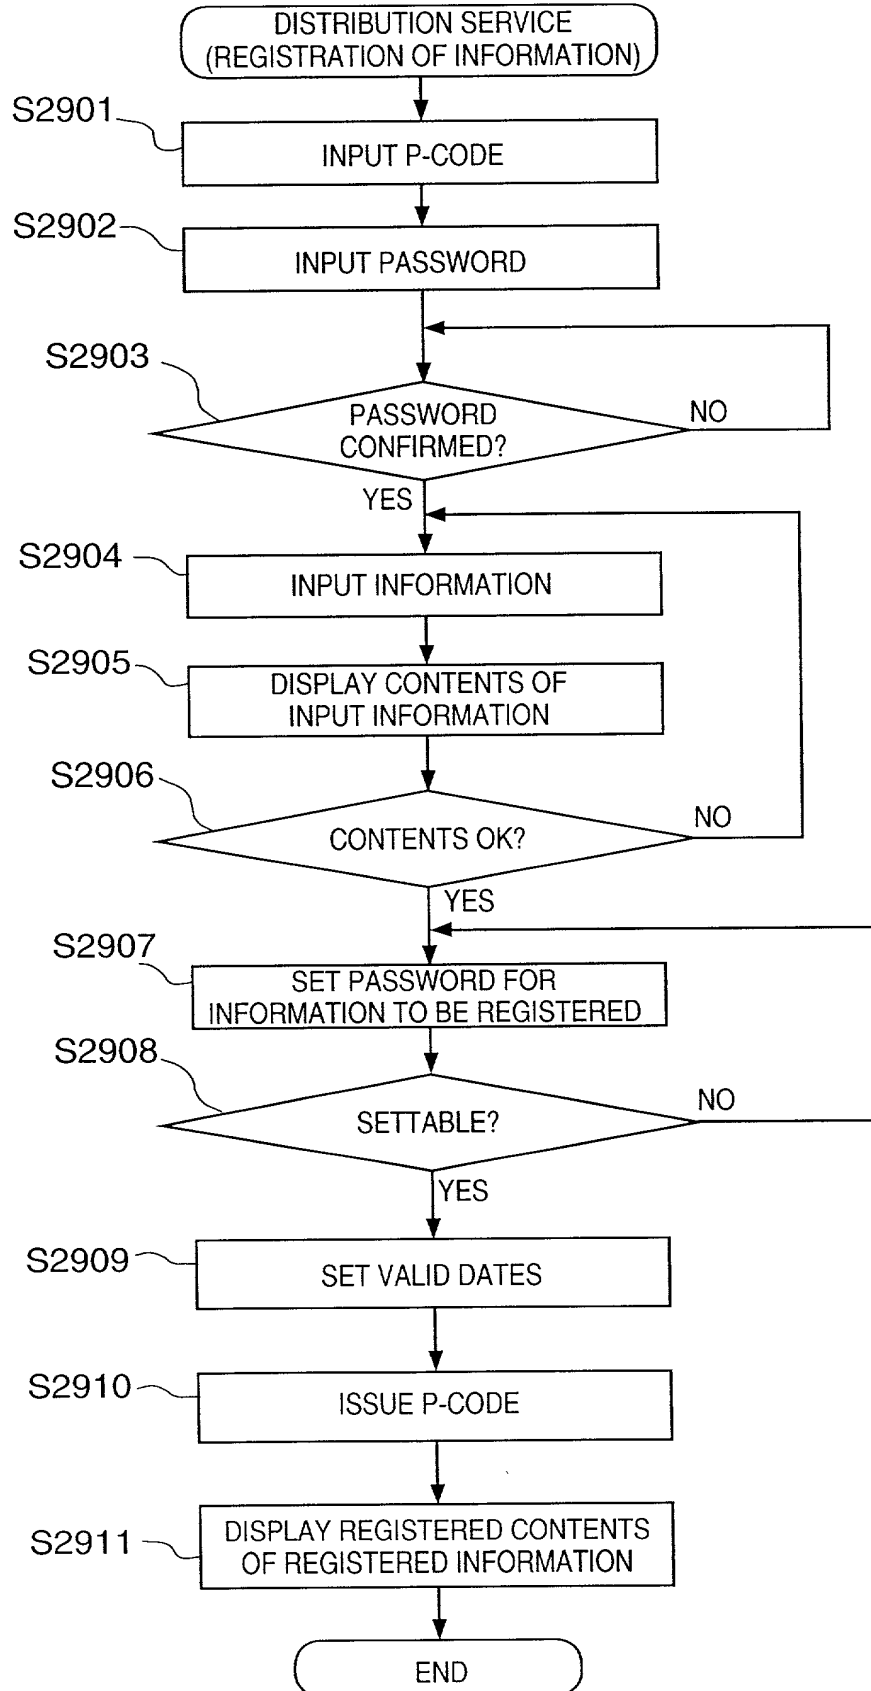


FIG. 101A





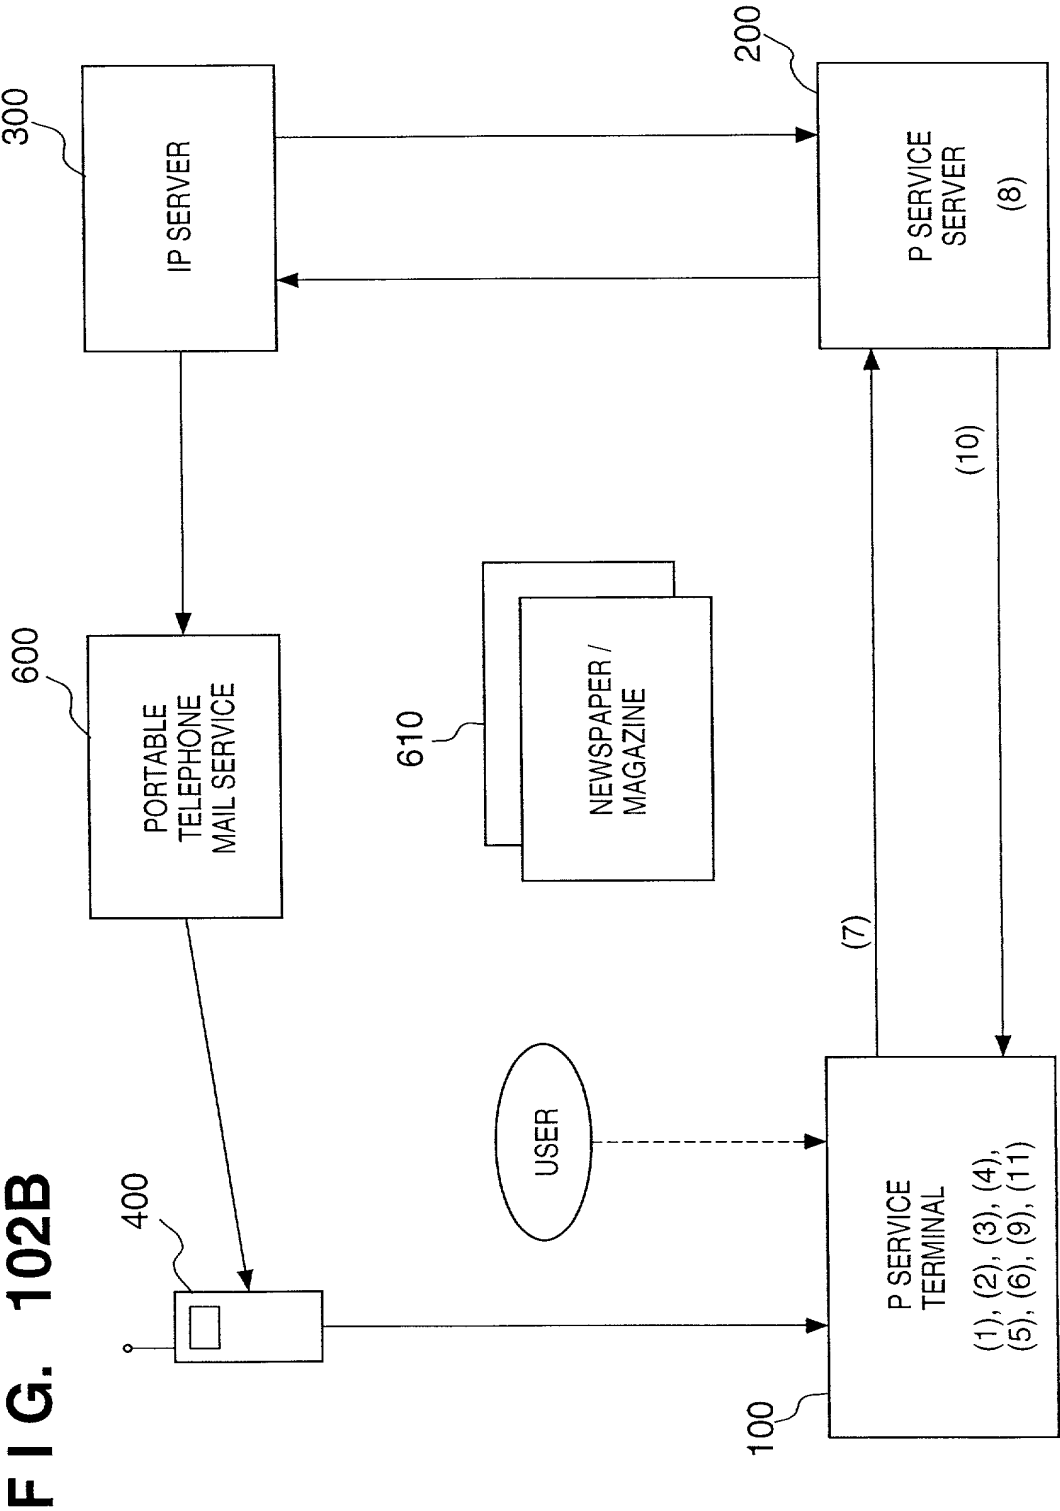


FIG. 103A

ACQUISITION OF IP INFORMATION

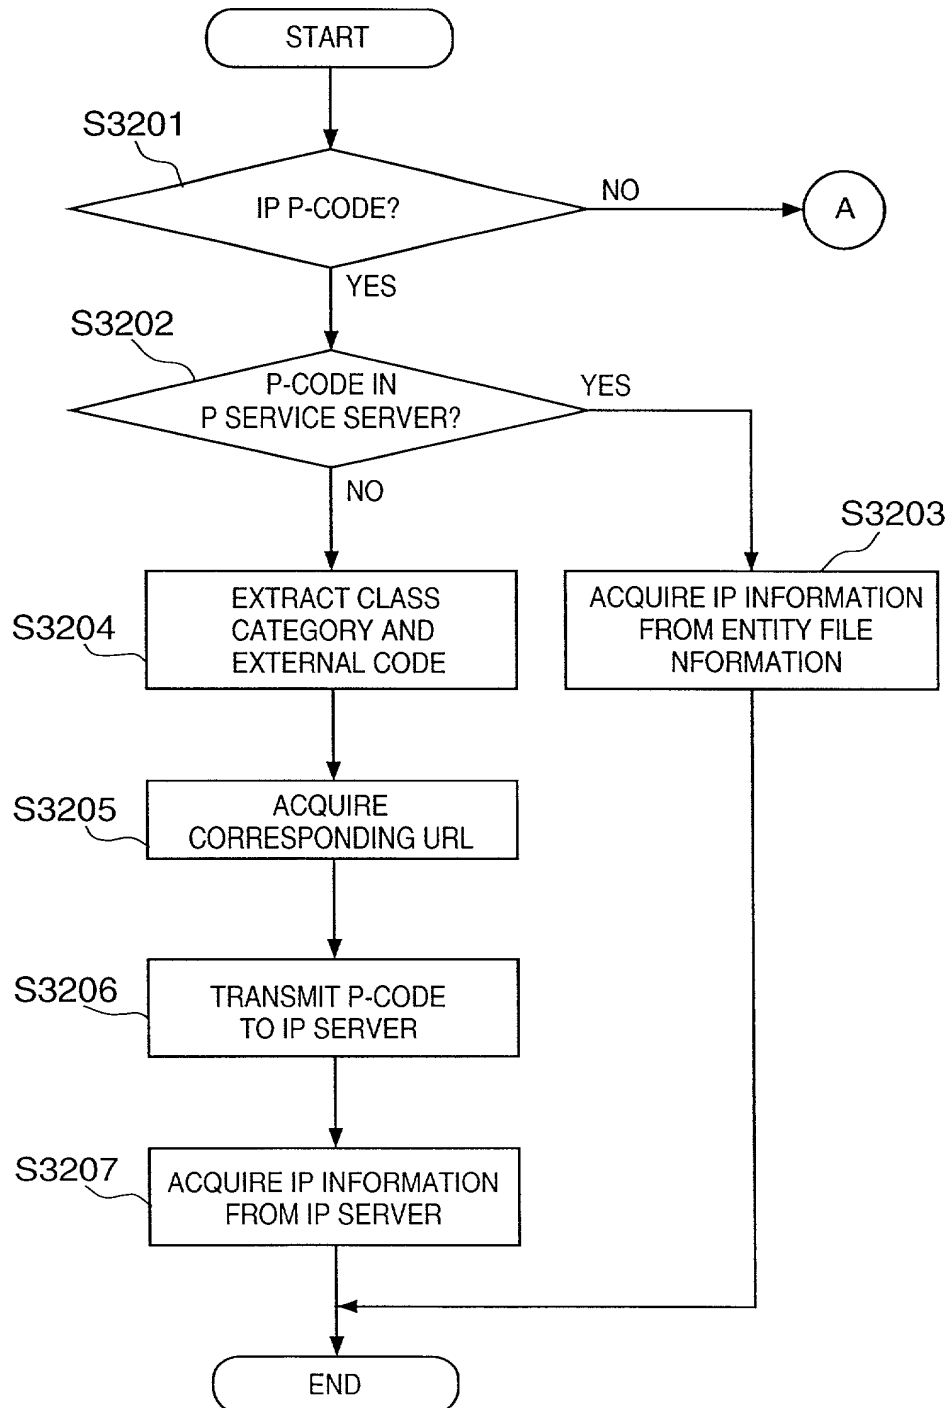


FIG. 103B

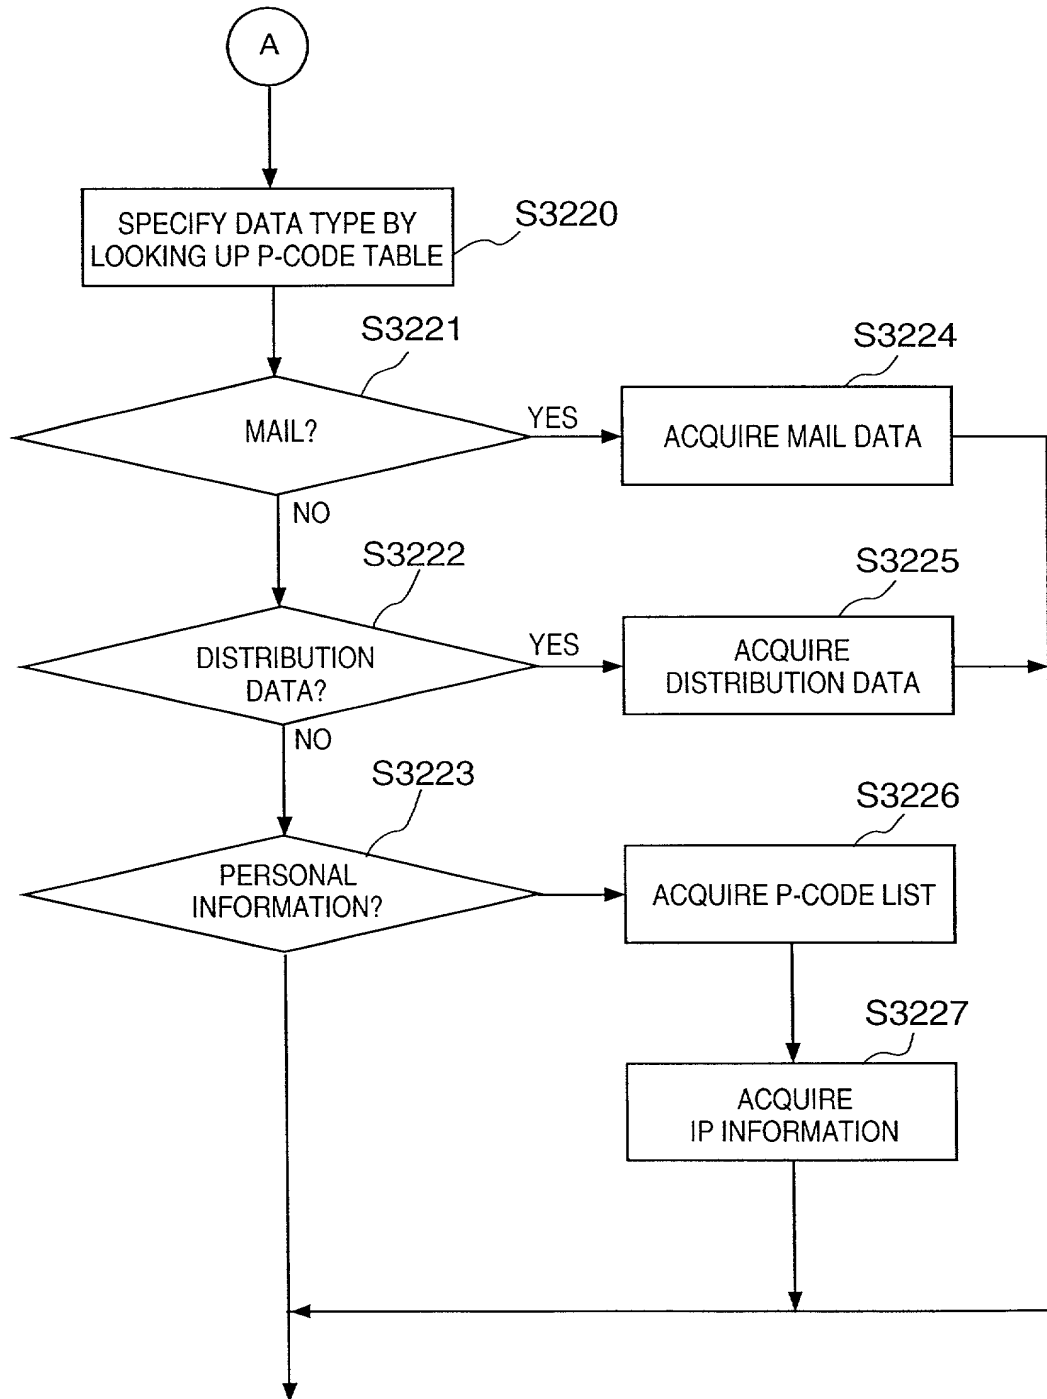


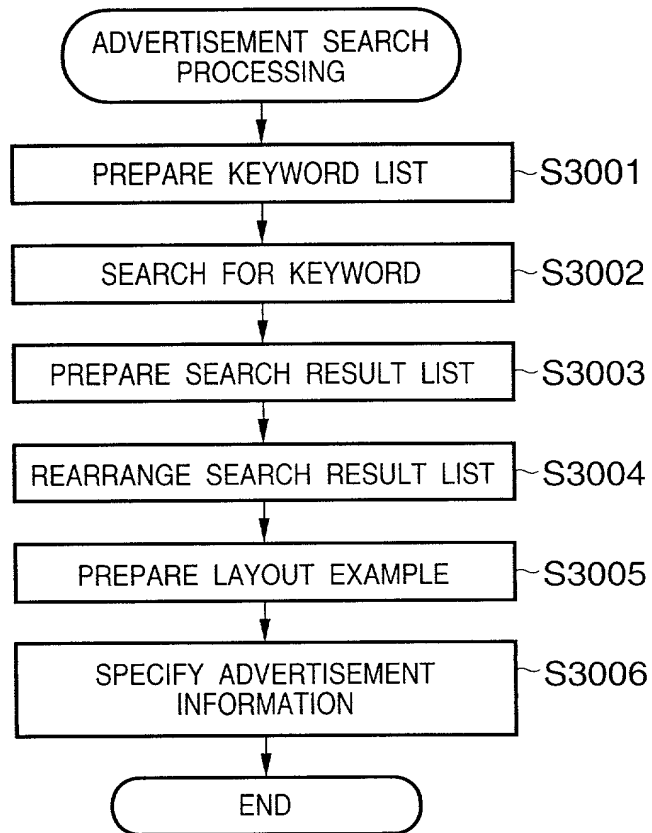
FIG. 104

FIG. 105A

IP INFORMATION LIST	
KEYWORD	WEIGHT
MARRIAGE	+10

FIG. 105B

USER REGISTRATION LIST	
KEYWORD	WEIGHT
TOKYO	+1
25 YEARS OLD	+1

FIG. 105C

P SERVICE TERMINAL LIST	
KEYWORD	WEIGHT
SAITAMA	+1

FIG. 105D

HIGHEST PRIORITY LIST	
KEYWORD	WEIGHT
ADMISSION	+5
CHINESE CUISINE	+4

FIG. 105E

LOWEST PRIORITY LIST	
KEYWORD	WEIGHT
TOKYO	+1
KANAGAWA	+1

FIG. 106A

SEARCH RESULT LIST OF IP INFORMATION LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
MARRIAGE	+10	+++	+100
	-5	***	-50
	+3	---	+30
	-4	+ - +	-40
	+7	* - *	+70

FIG. 106B

SEARCH RESULT LIST OF USER REGISTRATION LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
TOKYO	+2	@ @ *	+2
	+8	+ - *	+8
	-2	@ + +	-2
25 YEARS OLD	+10	@ * *	+10

FIG. 106C

SEARCH RESULT LIST OF P SERVICE TERMINAL LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
SAITAMA	+10	+ + @	+10
	+5	* + +	+5
	-5	@ * @	-5

FIG. 106D

SEARCH RESULT LIST OF HIGHEST PRIORITY LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
ADMISSION	+10	+ + /	+50
	+3	* / *	+15
CHINESE CUISINE	+3	% % %	+12
	-4	\$ \$ \$	-16
	+7	% & %	+28

FIG. 106E

SEARCH RESULT LIST OF LOWEST PRIORITY LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
TOKYO	+1	+ & +	+1
	-2	* * &	-2
KANAGAWA	+2	\$ - -	+2
	-2	+ - &	-2
	+1	* - &	+1

FIG. 107A

SEARCH RESULT LIST OF IP INFORMATION LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
MARRIAGE	+7	* - *	+85
	+10	+ - +	+80
	+3	- - -	+30
	-5	* * *	-30
	-4	+ - +	-45

FIG. 107B

SEARCH RESULT LIST OF USER REGISTRATION LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
TOKYO	+8	+ - *	+10
	-2	@ + +	+0
	+2	@ @ +	-1
25 YEARS OLD	+10	@ * *	+10

FIG. 107C

SEARCH RESULT LIST OF P SERVICE TERMINAL LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
SAITAMA	+10	+ + @	+15
	+5	* + +	+3
	-5	@ * @	-8

FIG. 107D

SEARCH RESULT LIST OF HIGHEST PRIORITY LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
ADMISSION	+10	+ + /	+40
	+3	* / *	+10
CHINESE CUISINE	+7	% & %	+25
	+3	% % %	+20
	-4	\$ \$ \$	-5

FIG. 107E

SEARCH RESULT LIST OF LOWEST PRIORITY LIST			
KEYWORD	WEIGHT	P-CODE	DEGREE OF MATCHING
TOKYO	-2	* * &	+4
	+1	+ & +	-5
KANAGAWA	+2	\$ - -	+10
	-2	+ - &	-1
	+1	* - \$	-5

116/119

RECEPTION OF MAIL AND DISPLAY OF CONTENTS OF MAIL

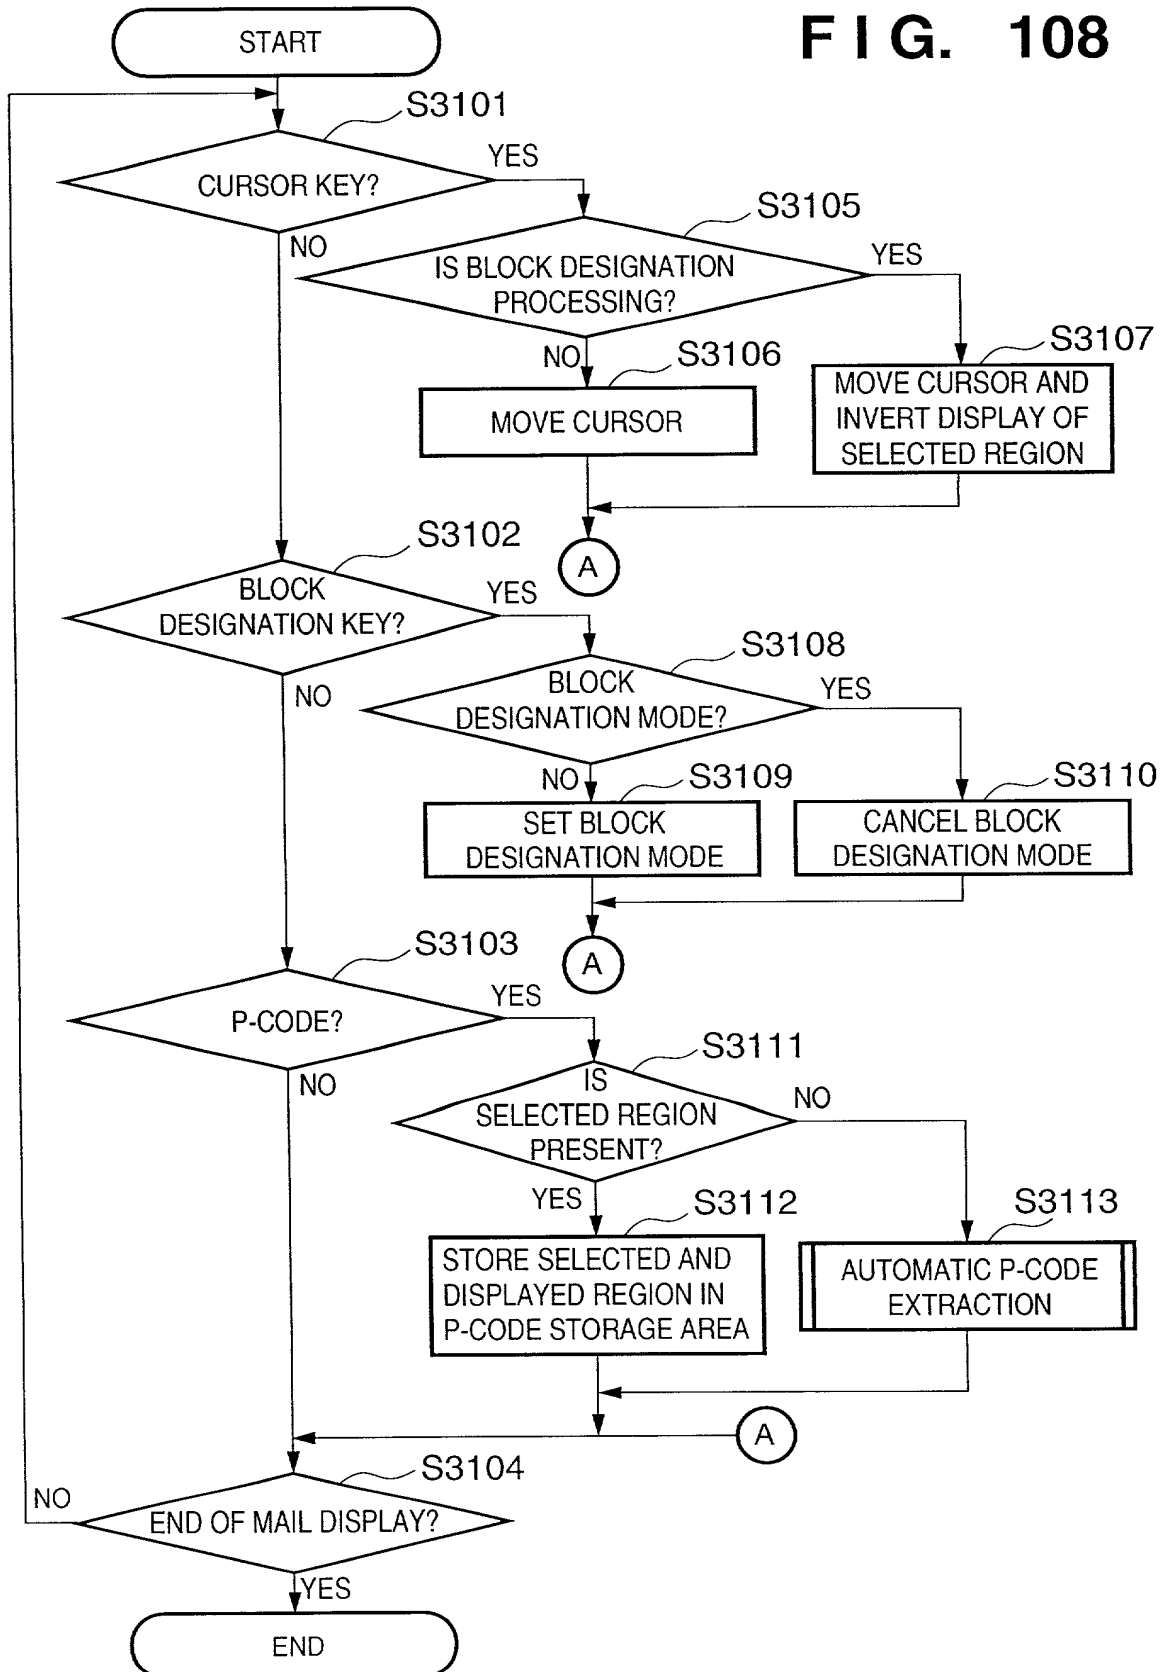
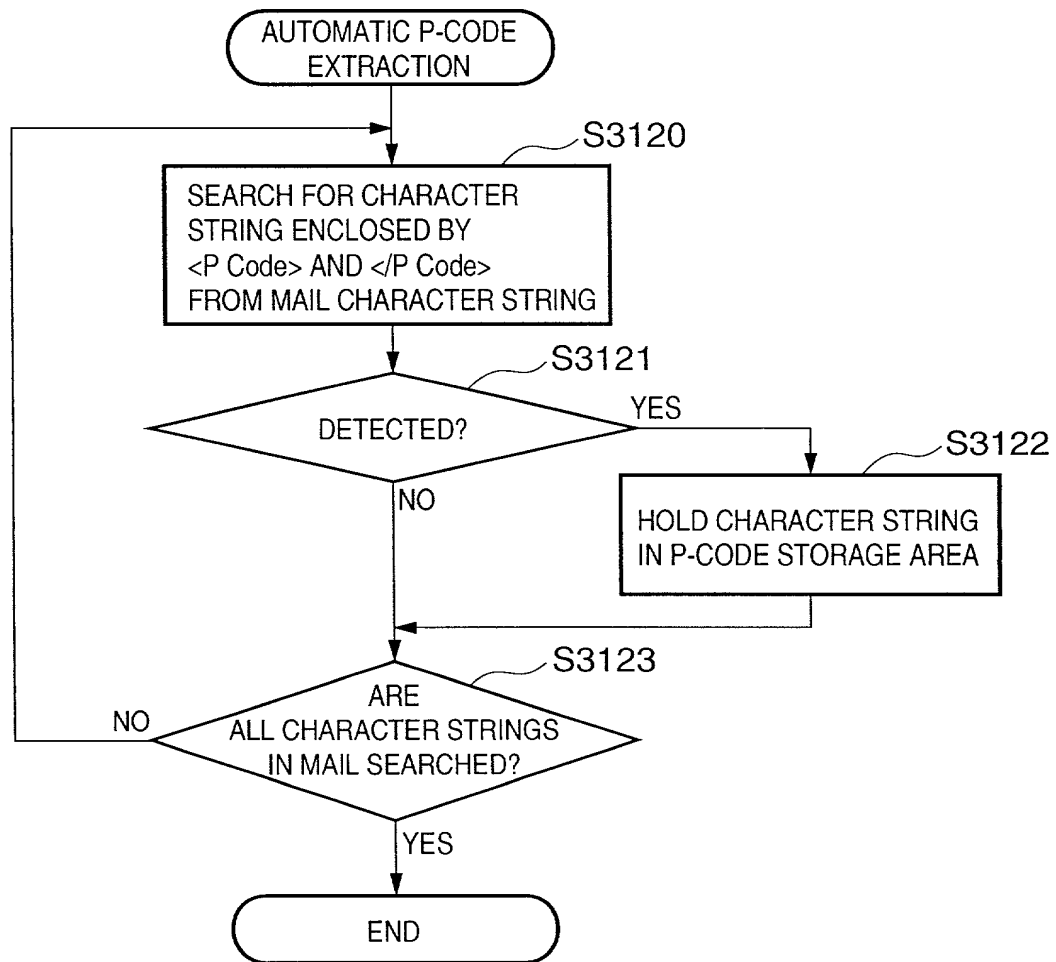
FIG. 108

FIG. 109

MAIL UNDER DISPLAY AND AUTOMATIC P-CODE EXTRACTION



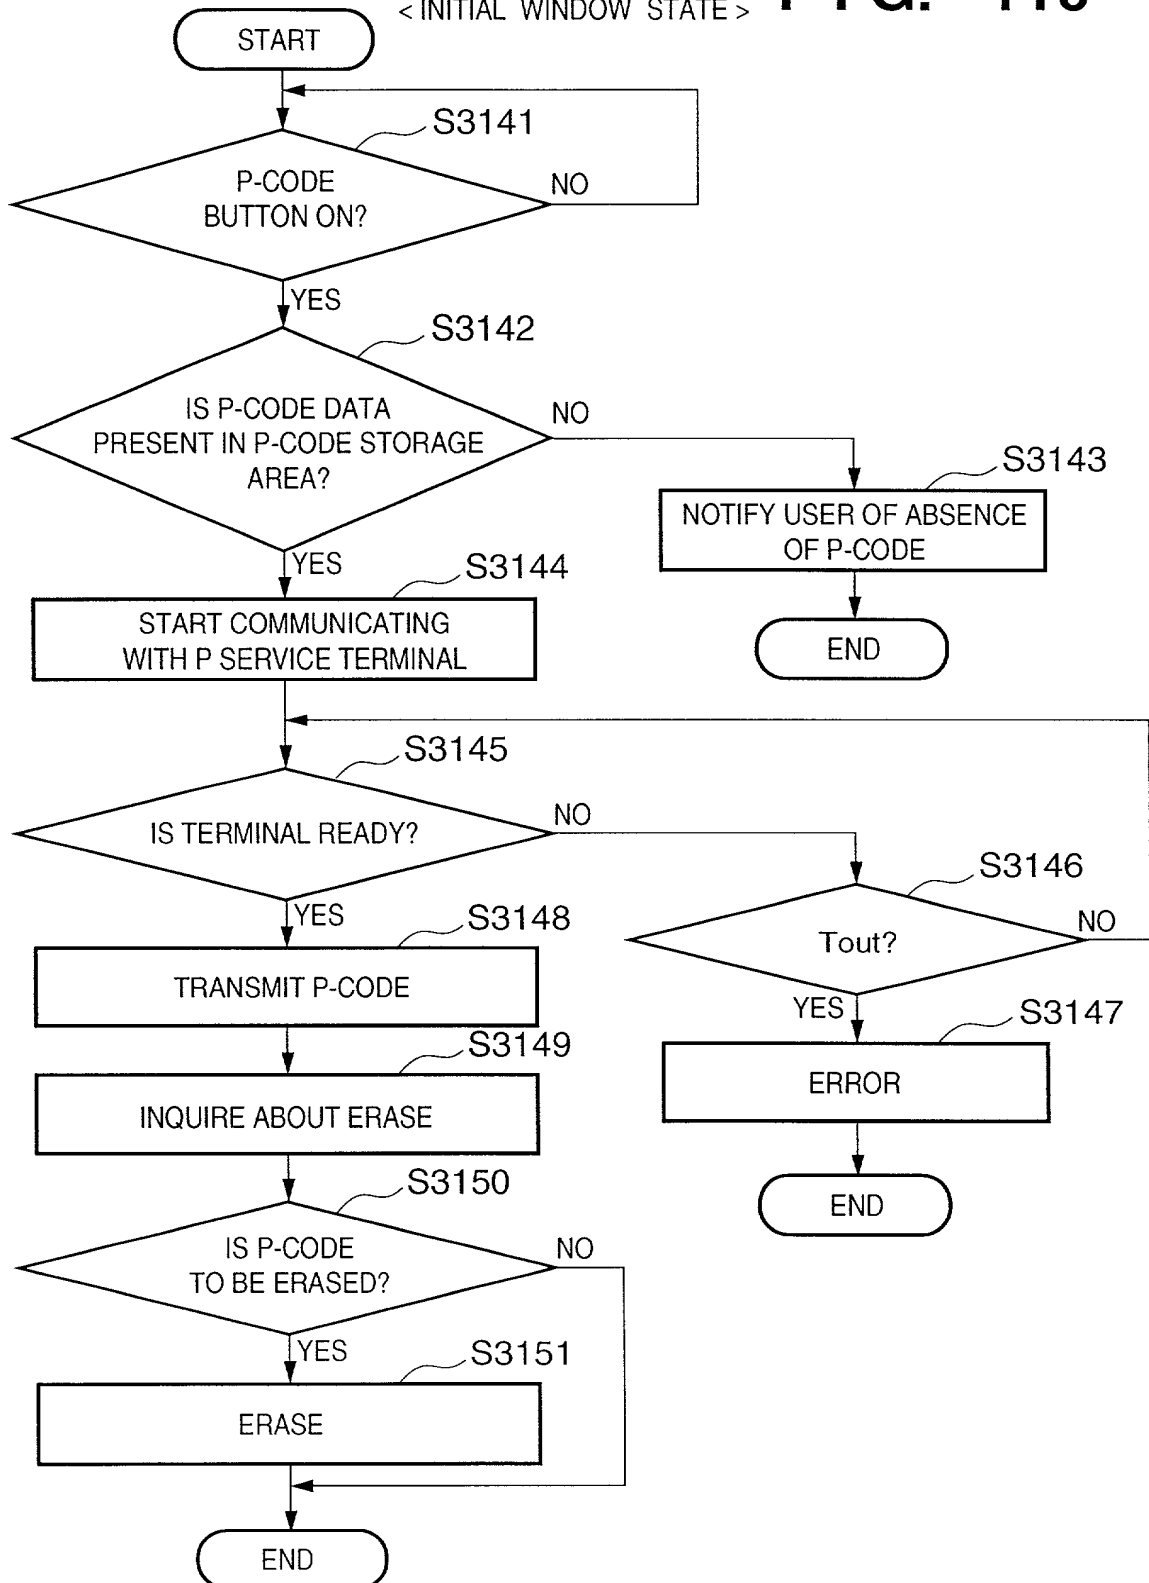
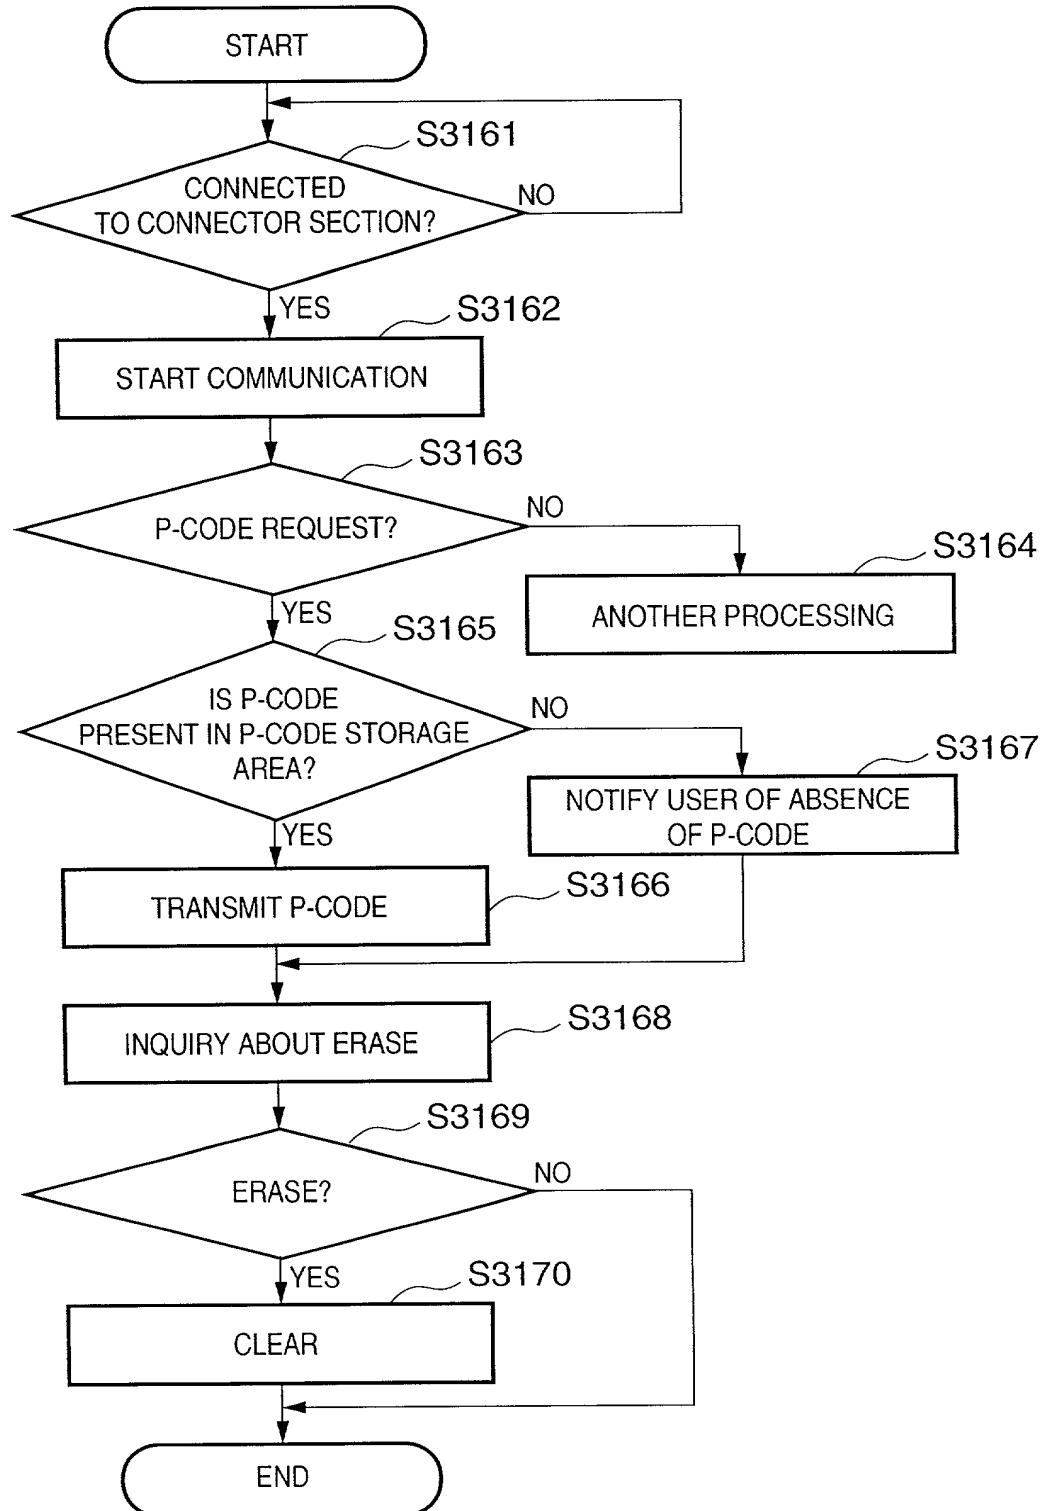


FIG. 111

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INFORMATION PROVIDING METHOD, INFORMATION PROVIDING SYSTEM,
TERMINAL APPARATUS, AND STORAGE MEDIUM STORING INFORMATION
PROVIDING PROGRAM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States
Application No. or PCT International Application No. _____
and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended
by any amendment referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's
certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below
and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date
before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No)</u> <u>Priority Claimed</u>
Japan	11-107061	April 14, 1999	Yes
Japan	11-283459	October 4, 1999	Yes

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT international application
designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the
prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty
to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the
prior application and the national or PCT international filing date of this application.

<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>Status (Patented, Pending, Abandoned)</u>
N/A		

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and
to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address
associated with that Customer Number.

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief
are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are
punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements
may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor HIROSHI SATOMI

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 16-29-A506, Fujigaoka 1-chome, Aoba-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 2)

Full Name of Second Joint Inventor, if any AKIHIRO MASUKAWA

Second Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 905-32, Shinmarukohigashi 2-chome, Nakahara-ku,

Kawasaki-shi, Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any KENJI KASAI

Third Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 6-15-202, Shimomaruko 2-chome, Ohta-ku, Tokyo, Japan

Post Office Address c/o Canon Kabushiki Kaisha,

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fourth Joint Inventor, if any SHINJI FUKUNAGA

Fourth Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 5-2-502, Hakusan 4-chome, Asao-ku, Kawasaki-shi,

Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fifth Joint Inventor, if any ATSUSHI INOUE

Fifth Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 19-10, Ohtsuka 4-chome, Bunkyo-ku, Tokyo, Japan

Post Office Address c/o Canon Kabushiki Kaisha,

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Sixth Joint Inventor, if any KOSUKE ITO

Sixth Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 22-2-603, Kamiuma 2-chome, Setagaya-ku, Tokyo, Japan

Post Office Address c/o Canon Kabushiki Kaisha,

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

(Page 3)

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

[illegible]